

Features

- Lowest power 32 macrocell CPLD
- 5.0 ns pin-to-pin logic delays
- System frequencies up to 200 MHz
- 32 macrocells with 750 usable gates
- Available in small footprint packages
 - 48-ball CS BGA (36 user I/O pins)
 - 44-pin VQFP (36 user I/O)
 - 44-pin PLCC (36 user I/O)
- Optimized for 3.3V systems
 - Ultra-low power operation
 - 5V tolerant I/O pins with 3.3V core supply
 - Advanced 0.35 micron five layer metal EEPROM process
 - Fast Zero Power™ (FZP) CMOS design technology
- Advanced system features
 - In-system programming
 - Input registers
 - Predictable timing model
 - Up to 23 available clocks per function block
 - Excellent pin retention during design changes
 - Full IEEE Standard 1149.1 boundary-scan (JTAG)
 - Four global clocks
 - Eight product term control terms per function block
- Fast ISP programming times
- Port Enable pin for dual function of JTAG ISP pins
- 2.7V to 3.6V supply voltage at industrial temperature range
- Programmable slew rate control per macrocell
- Security bit prevents unauthorized access
- Refer to XPLA3 family data sheet ([DS012](#)) for architecture description

Description

The XCR3032XL is a 3.3V, 32-macrocell CPLD targeted at power sensitive designs that require leading edge programmable logic solutions. A total of two function blocks provide 750 usable gates. Pin-to-pin propagation delays are 5.0 ns with a maximum system frequency of 200 MHz.

TotalCMOS Design Technique for Fast Zero Power

Xilinx offers a TotalCMOS CPLD, both in process technology and design technique. Xilinx employs a cascade of CMOS gates to implement its sum of products instead of the traditional sense amp approach. This CMOS gate implementation allows Xilinx to offer CPLDs that are both high performance and low power, breaking the paradigm that to have low power, you must have low performance. Refer to [Figure 1](#) and [Table 1](#) showing the I_{CC} vs. Frequency of our XCR3032XL TotalCMOS CPLD (data taken with two resettable up/down, 16-bit counters at 3.3V, 25°C).

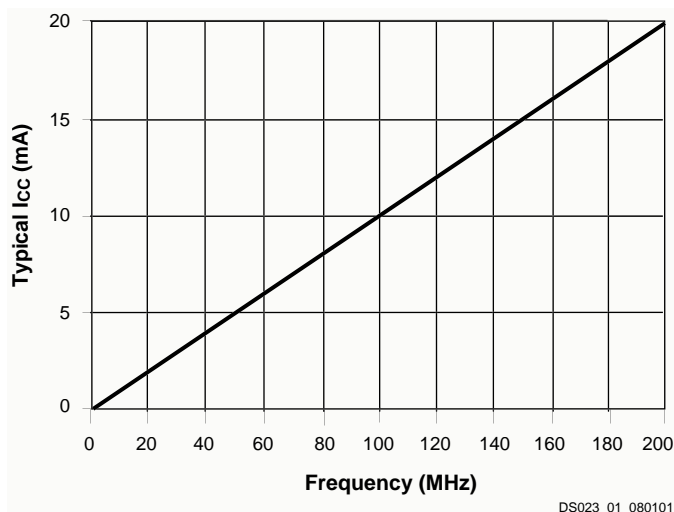


Figure 1: I_{CC} vs. Frequency at $V_{CC} = 3.3V$, 25°C

Table 1: I_{CC} vs. Frequency ($V_{CC} = 3.3V$, 25°C)

| Frequency (MHz) | 0 | 1 | 5 | 10 | 20 | 50 | 100 | 200 |
|-----------------------|------|------|------|------|------|-----|-------|------|
| Typical I_{CC} (mA) | 0.02 | 0.13 | 0.54 | 1.06 | 2.09 | 5.2 | 10.26 | 20.3 |

DC Electrical Characteristics Over Recommended Operating Conditions⁽¹⁾

| Symbol | Parameter | Test Conditions | Min. | Max. | Unit |
|----------------|--|--|--------------------|------|---------|
| $V_{OH}^{(2)}$ | Output High voltage | $V_{CC} = 3.0V$ to $3.6V$, $I_{OH} = -8$ mA | 2.4 | - | V |
| | | $V_{CC} = 2.7V$ to $3.0V$, $I_{OH} = -8$ mA | 2.0 ⁽³⁾ | - | V |
| | | $I_{OH} = -500$ μA | 90% V_{CC} | - | V |
| V_{OL} | Output Low voltage | $I_{OL} = 8$ mA | - | 0.4 | V |
| $I_{IL}^{(4)}$ | Input leakage current | $V_{IN} = GND$ or V_{CC} | -10 | 10 | μA |
| $I_{IH}^{(4)}$ | I/O High-Z leakage current | $V_{IN} = GND$ or V_{CC} | -10 | 10 | μA |
| I_{CCSB} | Standby current | $V_{CC} = 3.6V$ | - | 100 | μA |
| I_{CC} | Dynamic current ^(5,6) | $f = 1$ MHz | - | 0.25 | mA |
| | | $f = 50$ MHz | - | 7.5 | mA |
| C_{IN} | Input pin capacitance ⁽⁷⁾ | $f = 1$ MHz | - | 8 | pF |
| C_{CLK} | Clock input capacitance ⁽⁷⁾ | $f = 1$ MHz | - | 12 | pF |
| $C_{I/O}$ | I/O pin capacitance ⁽⁷⁾ | $f = 1$ MHz | - | 10 | pF |

Notes:

1. See XPLA3 family data sheet ([DS012](#)) for recommended operating conditions
2. See [Figure 2](#) for output drive characteristics of the XPLA3 family.
3. This parameter guaranteed by design and characterization, not by testing.
4. Typical leakage current is less than 1 μA .
5. See [Table 1](#), [Figure 1](#) for typical values.
6. This parameter measured with a 16-bit, resettable up/down counter loaded into every function block, with all outputs disabled and unloaded. Inputs are tied to V_{CC} or ground. This parameter guaranteed by design and characterization, not testing.
7. Typical values, not tested.

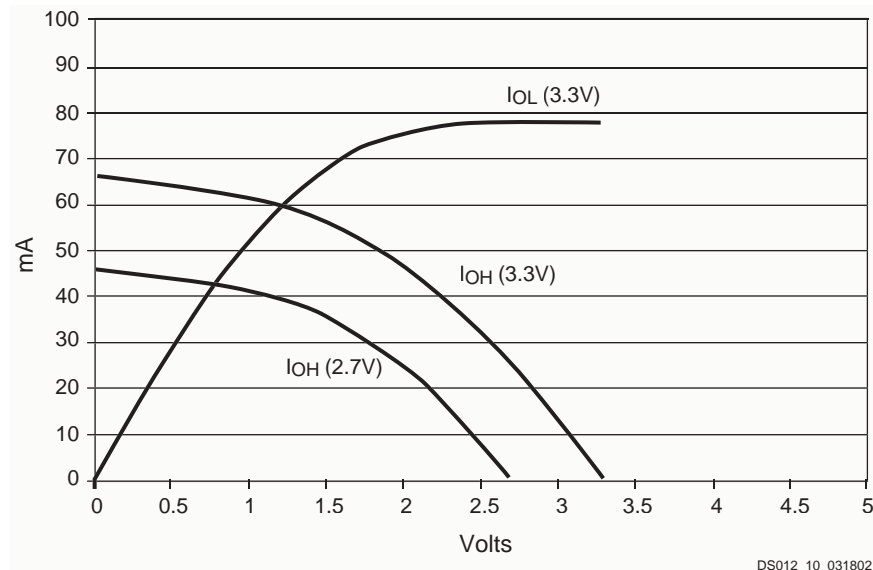


Figure 2: Typical I/V Curve for the XPLA3 Family, 3.3V, 25°C

AC Electrical Characteristics Over Recommended Operating Conditions^(1,2)

| Symbol | Parameter | -5 | | -7 | | -10 | | Unit |
|------------------------------------|--|------|------|------|------|------|------|------|
| | | Min. | Max. | Min. | Max. | Min. | Max. | |
| T _{PD1} | Propagation delay time (single p-term) | | 4.5 | - | 7.0 | - | 9.1 | ns |
| T _{PD2} | Propagation delay time (OR array) ⁽³⁾ | | 5.0 | - | 7.5 | - | 10.0 | ns |
| T _{CO} | Clock to output (global synchronous pin clock) | | 3.5 | | 5.0 | - | 6.5 | ns |
| T _{SUF} | Setup time (fast input register) | 2.5 | - | 3.0 | - | 3.0 | - | ns |
| T _{SU1} ⁽⁴⁾ | Setup time (single p-term) | 3.0 | - | 4.3 | - | 5.4 | - | ns |
| T _{SU2} | Setup time (OR array) | 3.5 | - | 4.8 | - | 6.3 | - | ns |
| T _H ⁽⁴⁾ | Hold time | 0 | - | 0 | - | 0 | - | ns |
| T _{WLH} ⁽⁴⁾ | Global Clock pulse width (High or Low) | 2.5 | - | 3.0 | - | 4.0 | - | ns |
| T _{PLH} ⁽⁴⁾ | P-term clock pulse width | 4.0 | - | 5.0 | - | 6.0 | - | ns |
| T _R ⁽⁴⁾ | Input rise time | - | 20 | - | 20 | - | 20 | ns |
| T _L ⁽⁴⁾ | Input fall time | - | 20 | - | 20 | - | 20 | ns |
| f _{SYSTEM} ⁽⁴⁾ | Maximum system frequency | - | 200 | - | 119 | - | 95 | MHz |
| T _{CONFIG} ⁽⁴⁾ | Configuration time ⁽⁵⁾ | - | 30 | - | 30 | - | 30 | μs |
| T _{INIT} ⁽⁴⁾ | ISP initialization time | - | 30 | - | 30 | - | 30 | μs |
| T _{POE} ⁽⁴⁾ | P-term OE to output enabled | - | 7.2 | - | 9.3 | - | 11.2 | ns |
| T _{POD} ⁽⁴⁾ | P-term OE to output disabled ⁽⁶⁾ | - | 7.2 | - | 9.3 | - | 11.2 | ns |
| T _{PCO} ⁽⁴⁾ | P-term clock to output | - | 6.0 | - | 8.3 | - | 10.7 | ns |
| T _{PAO} ⁽⁴⁾ | P-term set/reset to output valid | - | 6.5 | - | 9.3 | - | 11.2 | ns |

Notes:

1. Specifications measured with one output switching.
2. See XPLA3 family data sheet ([DS012](#)) for recommended operating conditions.
3. See [Figure 4](#) for derating.
4. These parameters guaranteed by design and/or characterization, not testing.
5. Typical current draw during configuration is 3 mA at 3.6V.
6. Output C_L = 5 pF.

Internal Timing Parameters^(1,2)

| Symbol | Parameter | -5 | | -7 | | -10 | | Unit |
|--|--------------------------------------|------|------|------|------|------|------|------|
| | | Min. | Max. | Min. | Max. | Min. | Max. | |
| Buffer Delays | | | | | | | | |
| T _{IN} | Input buffer delay | - | 0.7 | - | 1.6 | - | 2.2 | ns |
| T _{FIN} | Fast Input buffer delay | - | 2.2 | - | 3.0 | - | 3.1 | ns |
| T _{GCK} | Global Clock buffer delay | - | 0.7 | - | 1.0 | - | 1.3 | ns |
| T _{OUT} | Output buffer delay | - | 1.8 | - | 2.7 | - | 3.6 | ns |
| T _{EN} | Output buffer enable/disable delay | - | 4.5 | - | 5.0 | - | 5.7 | ns |
| Internal Register, Product Term, and Combinatorial Delays | | | | | | | | |
| T _{LDI} | Latch transparent delay | - | 1.3 | - | 1.6 | - | 2.0 | ns |
| T _{SUI} | Register setup time | 1.0 | - | 1.0 | - | 1.2 | - | ns |
| T _{HI} | Register hold time | 0.3 | - | 0.5 | - | 0.7 | - | ns |
| T _{ECSU} | Register clock enable setup time | 2.0 | - | 2.5 | - | 3.0 | - | ns |
| T _{ECHO} | Register clock enable hold time | 3.0 | - | 4.5 | - | 5.5 | - | ns |
| T _{COI} | Register clock to output delay | - | 1.0 | - | 1.3 | - | 1.6 | ns |
| T _{AOI} | Register async. S/R to output delay | - | 2.0 | - | 2.3 | - | 2.1 | ns |
| T _{RAI} | Register async. recovery | - | 3.5 | - | 5.0 | - | 6.0 | ns |
| T _{PTCK} | Product term clock delay | - | 2.5 | - | 2.7 | - | 3.3 | ns |
| T _{LOGI1} | Internal logic delay (single p-term) | - | 2.0 | - | 2.7 | - | 3.3 | ns |
| T _{LOGI2} | Internal logic delay (PLA OR term) | - | 2.5 | - | 3.2 | - | 4.2 | ns |
| Feedback Delays | | | | | | | | |
| T _F | ZIA delay | - | 0.5 | - | 2.9 | - | 3.5 | ns |
| Time Adders | | | | | | | | |
| T _{LOGI3} | Fold-back NAND delay | - | 2.0 | - | 2.5 | - | 3.0 | ns |
| T _{UDA} | Universal delay | - | 1.2 | - | 2.0 | - | 2.5 | ns |
| T _{SLEW} | Slew rate limited delay | - | 4.0 | - | 5.0 | - | 6.0 | ns |

Notes:

1. These parameters guaranteed by design and characterization, not testing.
2. See XPLA3 family data sheet ([DS012](#)) for timing model.

Switching Characteristics

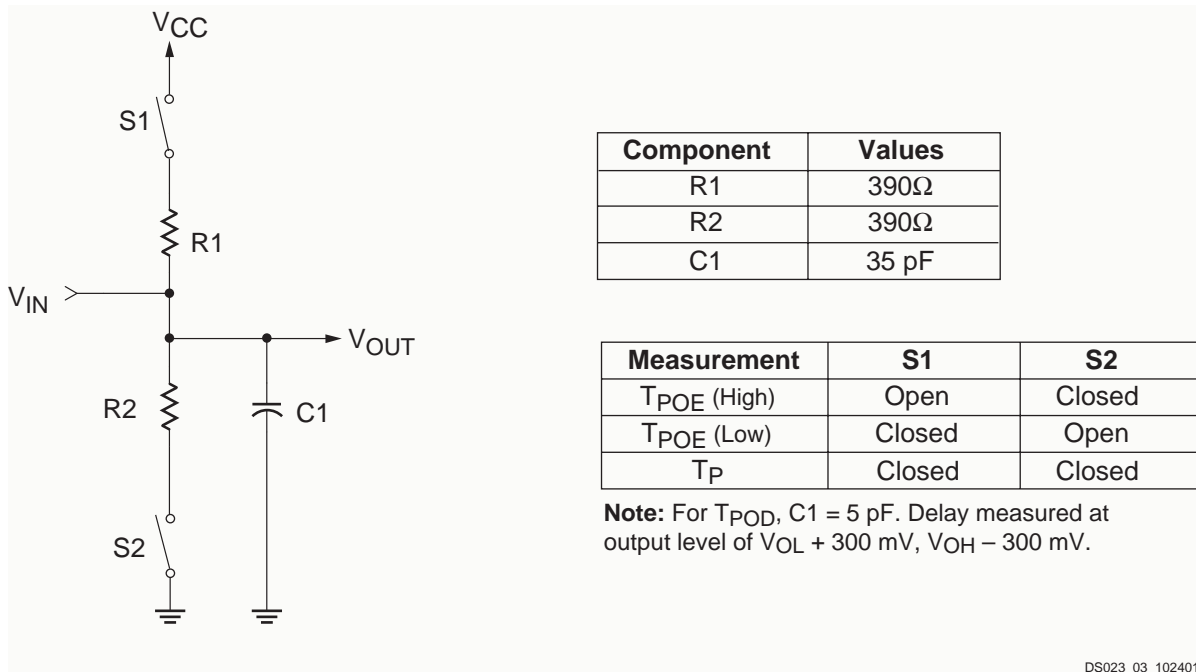


Figure 3: AC Load Circuit

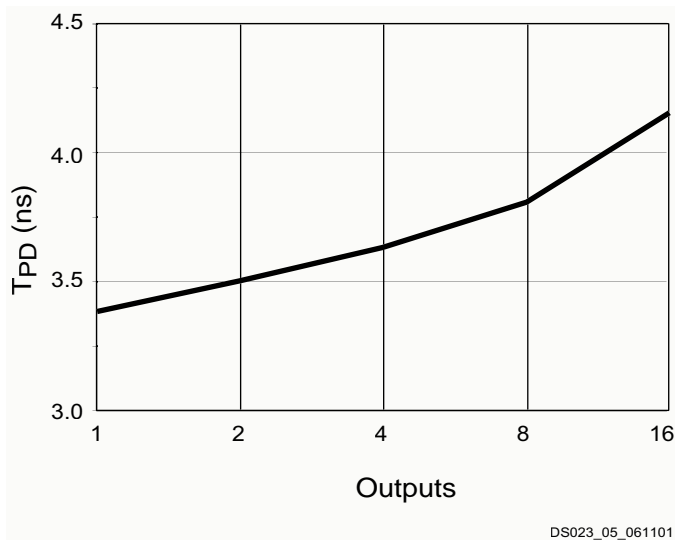


Figure 4: Derating Curve for T_{PD2}

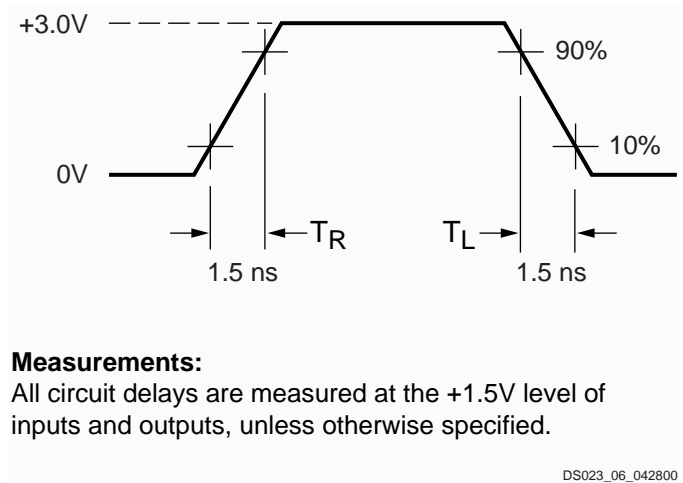


Figure 5: Voltage Waveform

Pin Descriptions

Table 2: XCR3032XL User I/O Pins

| | PC44 | VQ44 | CS48 |
|---------------------|------|------|------|
| Total User I/O Pins | 36 | 36 | 36 |

Table 3: XCR3032XL I/O Pins

| Function Block | Macrocell | PC44 | VQ44 | CS48 |
|----------------|-----------|-------------------|-------------------|-------------------|
| 1 | 1 | 4 | 42 | A2 |
| 1 | 2 | 5 | 43 | A1 |
| 1 | 3 | 6 | 44 | C4 |
| 1 | 4 | 7 ⁽¹⁾ | 1 ⁽¹⁾ | B1 ⁽¹⁾ |
| 1 | 5 | 8 | 2 | C2 |
| 1 | 6 | 9 | 3 | C1 |
| 1 | 7 | 11 | 5 | D3 |
| 1 | 8 | 12 | 6 | D1 |
| 1 | 9 | 13 ⁽¹⁾ | 7 ⁽¹⁾ | D2 ⁽¹⁾ |
| 1 | 10 | 14 | 8 | E1 |
| 1 | 11 | 16 | 10 | F1 |
| 1 | 12 | 17 | 11 | G1 |
| 1 | 13 | 18 | 12 | E4 |
| 1 | 14 | 19 | 13 | F2 |
| 1 | 15 | 20 | 14 | G2 |
| 1 | 16 | 21 | 15 | F3 |
| 2 | 1 | 41 | 35 | C5 |
| 2 | 2 | 40 | 34 | A6 |
| 2 | 3 | 39 | 33 | B6 |
| 2 | 4 | 38 ⁽¹⁾ | 32 ⁽¹⁾ | B7 ⁽¹⁾ |
| 2 | 5 | 37 | 31 | D4 |
| 2 | 6 | 36 | 30 | C6 |
| 2 | 7 | 34 | 28 | D6 |
| 2 | 8 | 33 | 27 | D7 |
| 2 | 9 | 32 ⁽¹⁾ | 26 ⁽¹⁾ | E5 ⁽¹⁾ |
| 2 | 10 | 31 | 25 | E7 |
| 2 | 11 | 29 | 23 | F7 |
| 2 | 12 | 28 | 22 | G7 |
| 2 | 13 | 27 | 21 | G6 |
| 2 | 14 | 26 | 20 | F5 |

Table 3: XCR3032XL I/O Pins

| Function Block | Macrocell | PC44 | VQ44 | CS48 |
|----------------|-----------|------|------|------|
| 2 | 15 | 25 | 19 | G5 |
| 2 | 16 | 24 | 18 | F4 |

Notes:

- JTAG pins


Table 4: XCR3032XL Global, JTAG, Port Enable, Power, and No Connect Pins

| Pin Type | PC44 | VQ44 | CS48 |
|-----------------|-------------------|------------------|-------------------|
| IN0 / CLK0 | 2 | 40 | A3 |
| IN1 / CLK1 | 1 | 39 | B4 |
| IN2 / CLK2 | 44 | 38 | A4 |
| IN3 / CLK3 | 43 | 37 | B5 |
| TCK | 32 | 26 | E5 |
| TDI | 7 | 1 | B1 |
| TDO | 38 | 32 | B7 |
| TMS | 13 | 7 | D2 |
| PORT_EN | 10 ⁽¹⁾ | 4 ⁽¹⁾ | C3 ⁽¹⁾ |
| V _{CC} | 3, 15, 23, 35 | 9, 17, 29, 41 | B3, C7, E2, G4 |
| GND | 22, 30, 42 | 16, 24, 36 | A5, E3, E6 |
| No Connects | - | - | A7, B2, F6, G3 |

Notes:

- Port Enable is brought High to enable JTAG pins when JTAG pins are used as I/O. See family data sheet [\(DS012\)](#) for full explanation.

Ordering Information

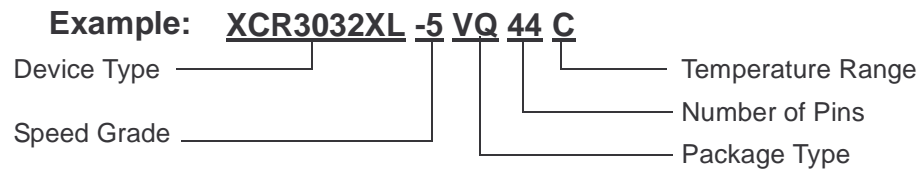

Device Ordering Options

| Speed | | Package | | Temperature | |
|-------|-------------------------|---------|---|----------------|---|
| -10 | 10 ns pin-to-pin delay | PC44 | 44-pin Plastic Lead Chip Carrier (PLCC) | C = Commercial | T _A = 0°C to +70°C V _{CC} = 3.0V to 3.6V |
| -7 | 7.5 ns pin-to-pin delay | VQ44 | 44-pin Very Thin Quad Flat Pack (VQFP) | I = Industrial | T _A = -40°C to +85°C V _{CC} = 2.7V to 3.6V |
| -5 | 5 ns pin-to-pin delay | CS48 | 48-ball Chip Scale Package | | |

Component Availability

| Pins | | 44 | 44 | 48 |
|-----------|-----|--------------|--------------|-------------|
| Type | | Plastic PLCC | Plastic VQFP | Plastic BGA |
| Code | | PC44 | VQ44 | CS48 |
| XCR3032XL | -5 | C | C | C |
| | -7 | C,I | C,I | C,I |
| | -10 | C, I | C, I | C, I |

Revision History

The following table shows the revision history for this document.

| Date | Version | Revision |
|----------|---------|---|
| 11/18/00 | 1.0 | Initial Xilinx release. |
| 02/05/01 | 1.1 | Removed Timing Model. |
| 04/11/01 | 1.2 | Update TSUF spec to meet UMC characterization data. Added I _{CC} vs. Freq. numbers, Table 1 and updated Figure 1 . Added Typical I/V curve, Figure 2 ; added Table 2 : Total User I/O; changed V _{OH} spec. |
| 04/19/01 | 1.3 | Updated Typical I/V curve, Figure 2 : added voltage levels. |
| 08/27/01 | 1.4 | Changed from Advance to Preliminary; updated DC Electrical Characteristics; AC Electrical Characteristics; Internal Timing Parameters; added Derating Curve; added -10 industrial packages. Added 200 MHz to Figure 1 and Table 1 . changed -5 F _{SYSTEM} to 200 MHz, -5 T _F to 0.5 ns. |
| 01/08/02 | 1.5 | Updated T _{HI} spec to correct a typo. Added single p-term setup time (T _{SU1}) to AC Table, renamed T _{SU} to T _{SU2} for setup time through the OR array. Updated AC Load Circuit diagram to more closely resemble true test conditions, added note for T _{POD} delay measurement. Updated note 5 in AC Characteristics table lowering typical current draw during configuration. |
| 06/27/02 | 1.6 | Added voltage and temperature to Figure 2 . Increased -5 T _{PCO} to 6.0 (from 5.5 ns) by adding T _{PTCK} parameter to internal timing model. |