

1.2K~1.5K Watt & 2K Watt Enclosed Parallel Power Supply




FEATURES

- Built in EMI filter
- Short circuit protection
- OLP, OVP, OTP
- Built in remote sense/control
- With parallel function

SPECIFICATIONS

- Input voltage..... 200~260VAC; 1Φ 3wire
- Input frequency..... 47~63Hz
- Input current..... 11A@230V
- DC voltage Adj..... ± 5% (typical)
- Line regulation..... ± 1%
- Load regulation..... ± 2%
- Leakage current..... 3.5mA (Max.)
- Withstand voltage: I/P-O/P, I/P-FG: 1.25KV for 1 min.
- Working temp.: -10~50°C@100%, 65°C@50% load
- Safety standard..... Design refer to UL1950, CSA 950
- EMC standard: Design refer to FCC part 15 J class A
- Weight/packing..... 4.5kgs/pc; 4pcs/20kgs

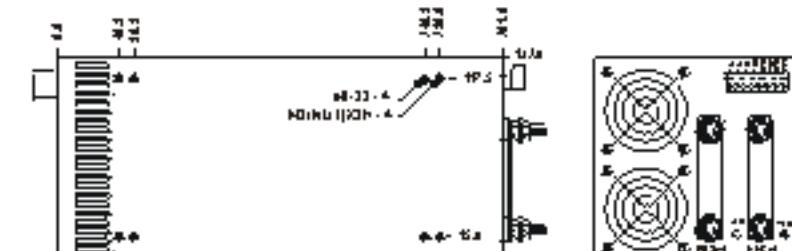



FEATURES

- Built in EMI filter
- Short circuit protection
- OLP, OVP, OTP
- Built in remote sense/control
- With parallel function

SPECIFICATIONS



- Input voltage..... 200~260VAC; 3Φ 4wire
- Input frequency..... 47~63Hz
- Input current..... 10A@230V; 1Φ
- DC voltage Adj..... ± 5% (typical)
- Line regulation..... ± 1%
- Load regulation..... ± 2%
- Leakage current..... 3.5mA (Max.)
- Withstand voltage: I/P-O/P, I/P-FG: 1.25KV for 1 min.
- Working temp.: -10~50°C@100%, 65°C@50% load
- Safety standard..... Design refer to UL1950, CSA 950
- EMC standard: Design refer to FCC part 15 J class A
- Weight/packing..... 8.9kgs/pc; 1pcs/13.5kgs

Parallel Schematics:

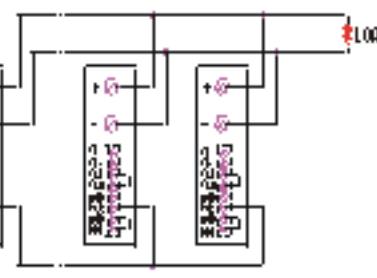
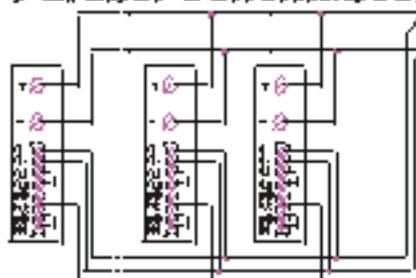


PARALLEL OPERATION WITH REMOTE SENSING



PARALLEL OPERATION WITHOUT REMOTE SENSING

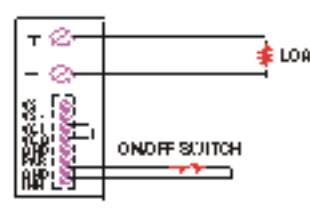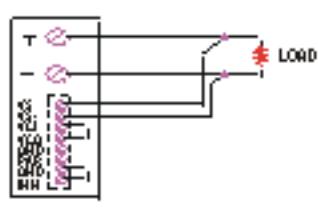

REMOTE SENSING

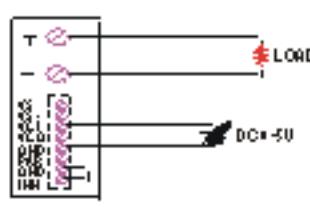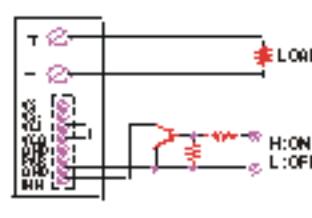

ON/OFF CONTROL BY TRANSISTOR

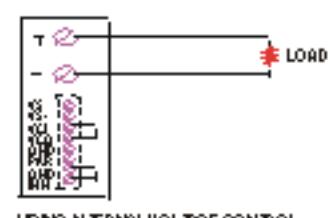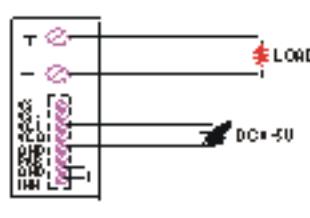

OUTPUT VOLTAGE ADJUSTMENT WITH DC +5V
USING INTERNAL VOLTAGE CONTROL


Model List

Model No.	Output	Tolerance	R&N	Eff.
1K2S-N003*	3.3VDC/180A	± 2%	± 2%	77%
1K2S-N005*	5VDC/180A	± 2%	± 2%	77%
1K2S-N012*	12VDC/100A	± 1%	± 1%	83%
1K2S-N015*	15VDC/80A	± 1%	± 1%	85%
1K2S-N024*	24VDC/50A	± 1%	± 1%	85%
1K2S-N048*	48VDC/25A	± 1%	± 1%	87%
1K5S-N005	5VDC/200A	± 2%	± 2%	80%
1K5S-N012	12VDC/125A	± 1%	± 1%	83%
1K5S-N015	15VDC/100A	± 1%	± 1%	84%
1K5S-N024	24VDC/62.5A	± 1%	± 1%	85%
1K5S-N048	48VDC/32A	± 1%	± 1%	87%

Note:

* The models with UL & cUL Approvals

Mechanical Drawing: (mm) Click to enlarge

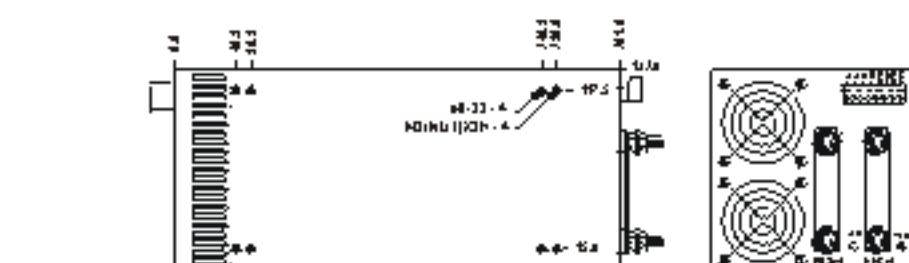

Model List

Model No.	Output	Tolerance	R&N	Eff.
2K0S-N005	5VDC/270A	± 3%	± 3%	78%
2K0S-N012	12VDC/167A	± 2%	± 2%	84%
2K0S-N015	15VDC/134A	± 2%	± 2%	84%
2K0S-N024	24VDC/83.5A	± 1%	± 1%	85%
2K0S-N048	48VDC/42A	± 1%	± 1%	86%

Mechanical Drawing: (mm) Click to enlarge

