

SAW Components

SAW RF filter for base stations

Band 25 uplink

Series/type:	B4182
Ordering code:	B39182B4182U410
Date:	Aug 07, 2014
Version:	2.4


© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

SAW Components		B4182
SAW RF filter		1882.5 MHz
Data sheet	SMD	


Application

- RF filter for base stations
- Low amplitude ripple
- No matching required for operation at 50 Ω
- Usable passband 65 MHz




Features

- Package size 3.0 x 3.0 x 1.1 mm³
- Package code DCC6C
- RoHS compatible
- Approximate weight 0.037 g
- Package for Surface Mount Technology (SMT)
- Ni, gold-plated terminals
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitive Level 1
- Filter surface passivated

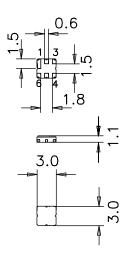

Pin configuration

- 2 Input
- 5 Output
- 1, 3, 4, 6 To be grounded



Please read *cautions and warnings and important notes* at the end of this document.

August 07, 2014

2

SAW Components			-					B4182
SAW RF filter							1882	.5 MHz
Data sheet			Sr					
Characteristics								
Temperature range for s Terminating source impe Terminating load impeda	dance:	on:		= 25 = 50 = 50				
					min.	typ. @ 25 °C	max.	
Center frequency				f _C		1882.5		MHz
Maximum insertion atte		. 1915.0	MHz	α_{max}	_	2.5	3.2	dB
Amplitude ripple (p-p) 185	60.0	1915.0	MHz	Δα	_	0.8	1.4	dB
Absolute group delay (185	,	. 1915.0	MHz	$\overline{\tau}$	1	11	21	ns
Return loss 185	60.0	. 1915.0	MHz		9	10	_	dB
Absolute attenuation				$lpha_{abs}$				
		1400.0			24	28	—	dB
140	0.0	1745.0	MHz		25	28		dB
193	0.0	1940.0	MHz		5	10		dB
194	0.0	3000.0	MHz		20	23	_	dB

☆TDK

SAW Componen	nts	•		-		-		1882	B4182 .5 MHz
Data sheet				S				1002	
Characteristics									
Temperature range Terminating source Terminating load im	impedance		n:		= 0 to = 50 Ω = 50 Ω				
						min.	typ. @ 25 °C	max.	
Center frequency					f _C		1882.5		MHz
Maximum insertion	attenuatio 1850.0		1915.0	MHz	α_{max}	_	2.9	3.5	dB
Amplitude ripple (p	-p) 1850.0		1915.0	MHz	Δα	_	1.1	1.7	dB
Absolute group del	ay (mean) 1850.0		1915.0	MHz	$\overline{\tau}$	1	11	21	ns
Return loss	1850.0		1915.0	MHz		9	10	_	dB
Absolute attenuatio	on 800.0		1400.0	MHz	$lpha_{abs}$	24	28	_	dB
	1400.0		1746.0	MHz		25	28	_	dB
	1930.0 1940.0		1940.0 3000.0			5 20	10 23	—	dB dB

Please read *cautions and warnings and important notes* at the end of this document.

SAW Components		B4182
SAW RF filter		1882.5 MHz
Data sheet	SMD	
Characteristics		
Temperature range for specification: Terminating source impedance: Terminating load impedance:	$T = -40 \text{ to } +85 \degree \text{C}$ $Z_{\text{S}} = 50 \ \Omega$ $Z_{\text{L}} = 50 \ \Omega$	

						min	typ.	may	
						min.	@ 25 °C	max.	
Center frequency					f _C		1882.5		MHz
Maximum insertior	n attenuatio	on			α_{max}				
	1850.0		1915.0	MHz		_	2.9	4.0	dB
Amplitude ripple (p	р-р)				Δα				
	1850.0		1915.0	MHz		_	1.1	2.2	dB
Absolute group de					$\overline{\tau}$				
	1850.0		1915.0	MHz		1	11	21	ns
Return loss									
	1850.0		1915.0	MHz		9	10		dB
Absolute attenuati	on				$lpha_{abs}$				
	800.0		1400.0	MHz		24	28	_	dB
	1400.0		1746.0	MHz		25	28	_	dB
	1930.0		1940.0	MHz		3	10		dB
	1940.0		3000.0	MHz		20	23		dB

SAW Components				B4182
SAW RF filter				1882.5 MHz
Data sheet				
Maximum ratings				
Operable temperature range	Т	-40/+85	°C	
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	6	V	
ESD voltage	V _{ESD}	50 ¹⁾	V	Machine Model
	-	250 ²⁾	V	Human Body Model


Input power	P_{IN}			
1850.0 1915.0	MHz	18	dBm	cw, 48 h, 85 °C
1930.0 1990.0	MHz	12	dBm	cw, 2000 h, 85 °C
1930.0 1990.0	MHz	15	dBm	cw, 2000 h, 55 °C

¹⁾ acc. to JESD22-A115B (MM - machine model), 10 negative & 10 positive pulses.


²⁾ acc. to JESD22-A114F (HBM - Human Body Model), 1 negative & 1 positive pulses.

6

☆TDK

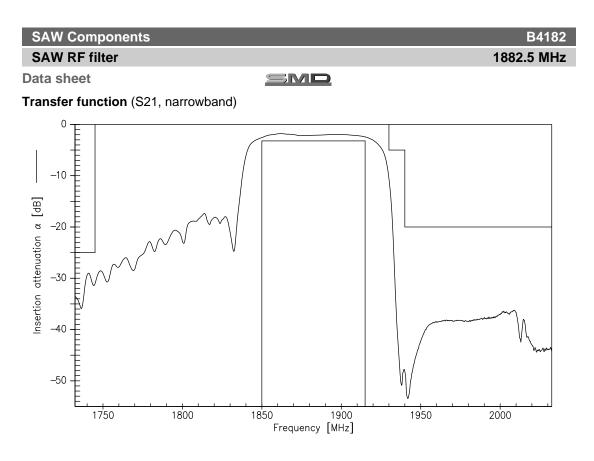

Transfer function (S21, wideband)

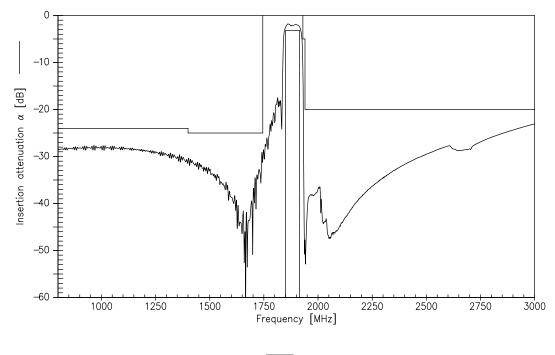

7

Please read *cautions and warnings and important notes* at the end of this document.

August 07, 2014

SAW Components

B4182 1882.5 MHz

SAW RF filter

SMD

References

Туре	B4182
Ordering code	B39182B4182U410
Marking and package	C61157-A7-A67
Packaging	F61074-V8168-Z000
Date codes	L_1126
S-parameters	B4182_NB.s2p , B4182_WB.s2p See file header for port/pin assignment table
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Matching coils	See Inductor pdf-catalog <u>http://www.tdk.co.jp/tefe02/coil.htm#aname1</u> and Data Library for circuit simulation <u>http://www.tdk.co.jp/etvcl/index.htm</u> for a large variety of matching coils.

For further information please contact your local EPCOS sales office or visit our webpage at <u>www.epcos.com</u>.

Published by EPCOS AG Systems, Acoustics, Waves Business Group

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2014. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

8

Please read *cautions and warnings and important notes* at the end of this document.

August 07, 2014

SAW Components		B4182
SAW RF filter		1882.5 MHz
Data sheet	SMD	

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
- 6. Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- 7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, TFAP, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

August 07, 2014