

PS222L

*Version : A.002
Issue Date : 2005/01/05
File Name : SP-PS222L-A.002.doc
Total Pages : 13*

3-Channel Secondary Monitoring IC With Over-Current Protection And an Additional 12V OCP Channel



新竹市科學園區展業一路 9 號 7 樓之 1

SILICON TOUCH TECHNOLOGY INC.

9-7F-1, Prosperity Road I, Science Based Industrial Park,
Hsin-Chu, Taiwan 300, R.O.C.

Tel : 886-3-5645656 Fax : 886-3-5645626



PS222L

3-Channel Secondary Monitoring IC With Over-Current Protection And an Additional 12V OCP Channel

General Description

PS222L is specially designed for switching power supply system. Four important functions of PS222L are the following: over-voltage protection, over-current protection, under-voltage protection and power good signal generating.

OVP/UVP (Over-Voltage/Under-Voltage Protection) monitors 3.3V, 5V and 12V to protect our power supply. FPO/ goes to high when one of these supply voltages exceeds their normal operation voltage range.

OCP (Over Current Protection) monitors IS33, IS5, IS12 input current sense. Composed of “ I_{ref} ” and “protection current range resistor”, an adjustable over-current condition helps users design OCP easily.


An additional OCP channel helps users monitor another 12V rail output current.

Power good signal generating can notify personal computer when power supply is ready or power supply is going to shutdown, therefore it can provide a reliable power supply environment.

Features



- Over/Under-voltage protection and lock out
- Over-current protection and lock out
- Fault protection output with open drain output stage
- Open drain power good output signal for power good input
- Built-in 300mS power good delay
- AC on 75mS delay for UV/OC protection
- 38mS PSON/ control de-bounce
- 14uS de-bounce for noise immunity
- Wide power supply range (4.2V~16V)
- Special care for AC power off

Block Diagram

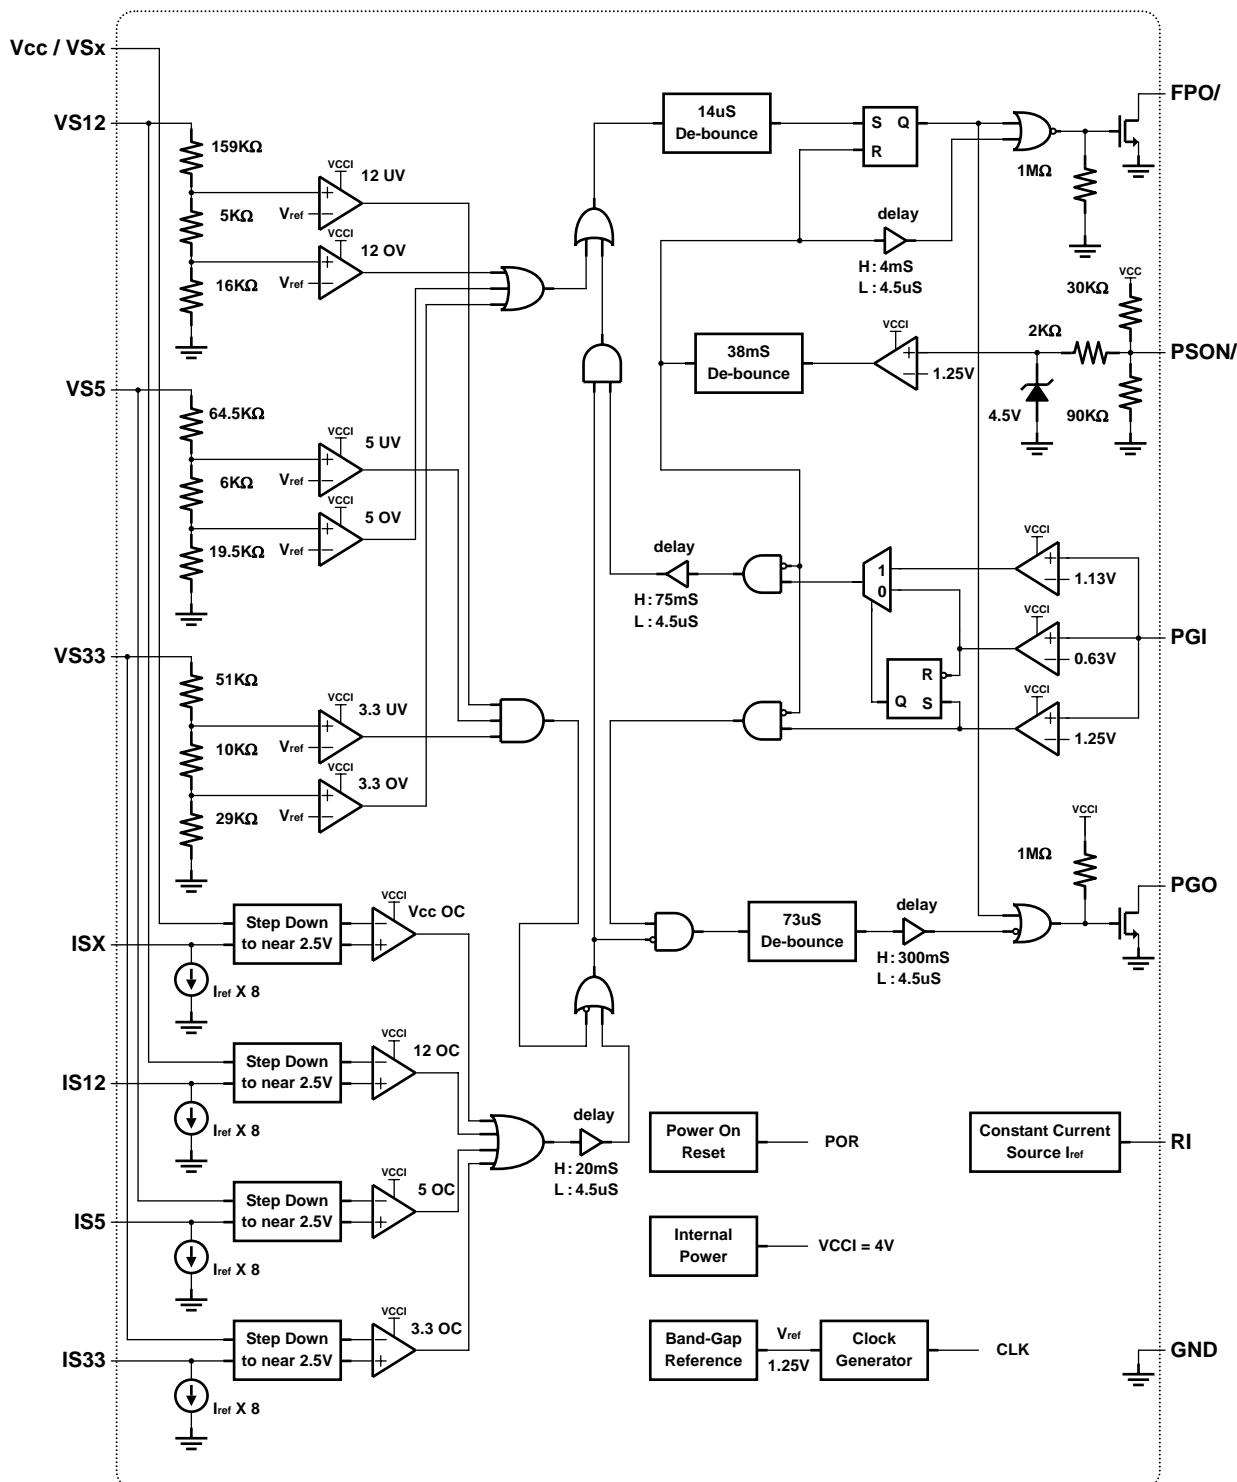



Timing Chart

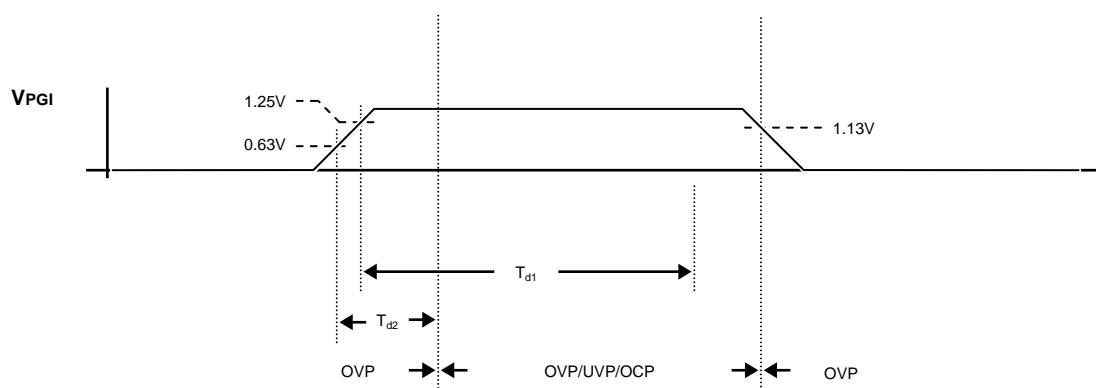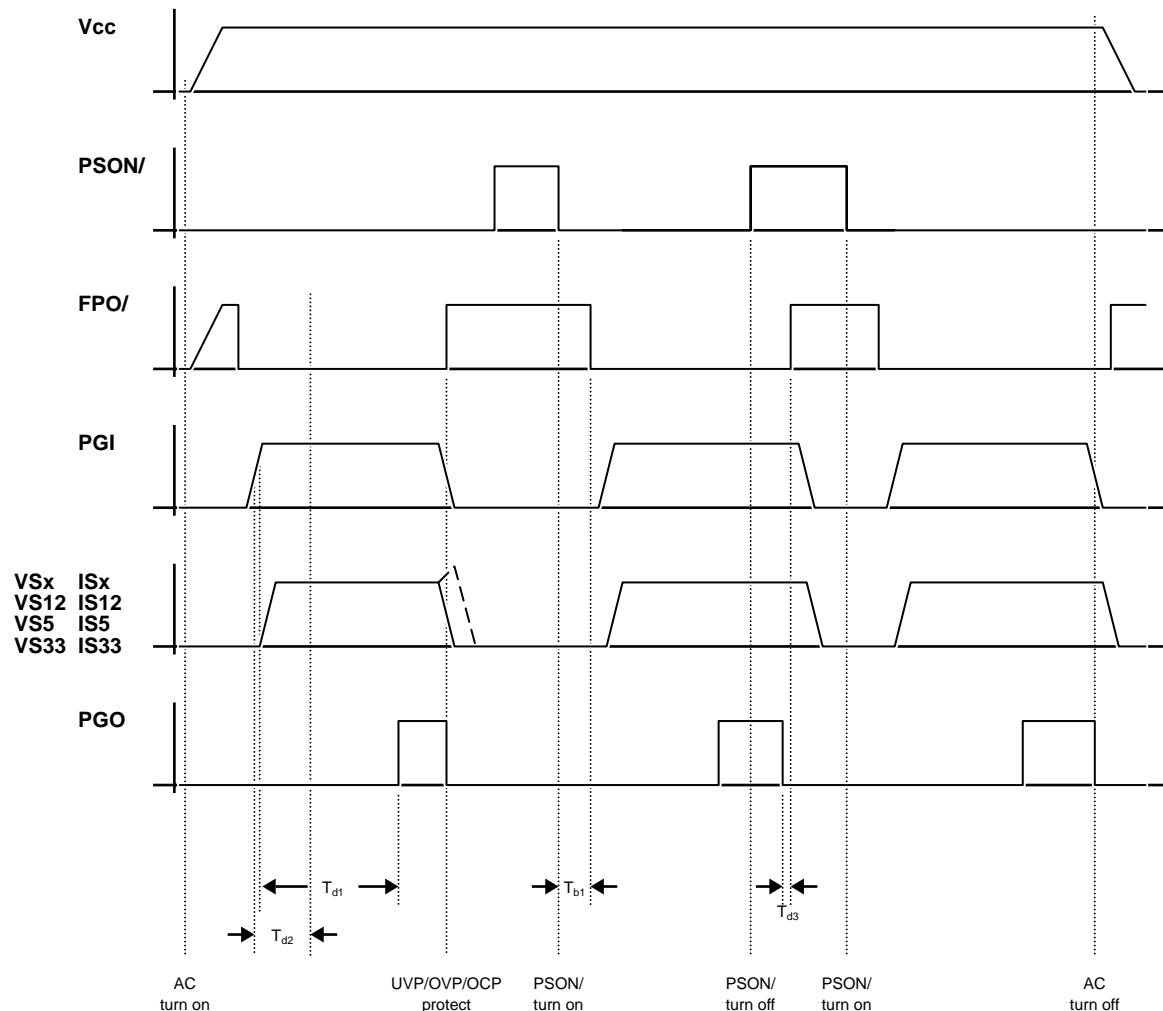



Pin Descriptions

| Pin No | Pin Name | Descriptions |
|--------|-----------|---|
| 1 | PGI | Power good input signal pin |
| 2 | GND | Ground |
| 3 | FPO/ | Inverted fault protection output ,open drain output stage |
| 4 | PSON/ | Remote ON/OFF control input pin |
| 5 | IS12 | 12V(1) over current protection input pin |
| 6 | RI | Current sense setting |
| 7 | ISx | 12V(2) over current protection input pin |
| 8 | IS5 | 5.0V over current protection input pin |
| 9 | IS33 | 3.3V over current protection input pin |
| 10 | VS12 | 12V(1) over/under voltage protection input pin |
| 11 | VS33 | 3.3V over/under voltage protection input pin |
| 12 | VS5 | 5.0V over/under voltage protection input pin |
| 13 | VCC / VSx | Power supply |
| 14 | PGO | Power good output signal pin , open drain output stage |

Absolute Maximum Ratings

| Parameter | | Rating | | Unit |
|-----------------------|---------------------|---------|------|------------------------|
| Storage Temperature | (T _{stg}) | -40 | to | +125 °C |
| Operating Temperature | (T _{opr}) | -30 | to | +90 °C |
| Supply Voltage | (V _{cc}) | VCC/VSx | -0.5 | to +16.0 V |
| Input Voltage Range | ISX, VS12, IS12 | -0.5 | to | +16.0 V |
| | VS5, IS5 | -0.5 | to | +9.0 V |
| | VS33, IS33 | -0.5 | to | +7.0 V |
| | PGI | -0.5 | to | +16.0 V |
| | PSON/ | -0.5 | to | V _{cc} +0.5 V |
| Output Voltage Range | FPO/ | -0.5 | to | +16.0 V |
| | PGO | -0.5 | to | V _{cc} +0.5 V |
| Output Current for RI | (I _{RI}) | RI | 12.5 | to 62.5 uA |
| ESD Susceptibility* | PSON/, PGO | > | 5000 | V |
| | FPOB, VS12 | > | 2000 | V |
| | PGI, IS12, VS5 | > | 3000 | V |
| | Others | > | 4000 | V |

* Human Body Model (HBM).



Electrical Characteristics, V_{CC}=12V, T_a = Full range. (unless otherwise specified)

Power Supply Section

| Parameter | Conditions | MIN | TYP | MAX | Unit |
|--|------------------------|-------|------|-------|------|
| Supply Voltage | | 4.2 | 5.0 | 16.0 | V |
| Supply Current | V _{PSON} = 5V | | 2 | 3 | mA |
| Power On Reset Threshold Voltage (V _{POR}) | | 3.2 | 3.4 | 3.6 | V |
| Power On Reset Hysteresis (V _{HYST}) | | -0.15 | -0.3 | -0.45 | V |

Over-Voltage Section

| Parameter | Conditions | MIN | TYP | MAX | Unit |
|------------------------|------------|------|------|------|------|
| Over-Voltage Threshold | VS33 | 3.8 | 3.9 | 4.0 | V |
| | VS5 | 5.6 | 5.8 | 6.0 | V |
| | VS12 | 13.5 | 14.0 | 14.2 | V |

Under-Voltage Section

| Parameter | Conditions | MIN | TYP | MAX | Unit |
|-------------------------|------------|------|------|------|------|
| Under-Voltage Threshold | VS33 | 2.8 | 2.9 | 3.0 | V |
| | VS5 | 4.2 | 4.4 | 4.6 | V |
| | VS12 | 10.3 | 10.8 | 11.0 | V |

Over-Current Section

| Parameter | Conditions | MIN | TYP | MAX | Unit |
|---|------------|------|------|------|------|
| Offset Voltage (OCP Comparator) | VSx, ISx | -5 | -2 | 1 | mV |
| | VS33, IS33 | -5 | -2 | 3 | mV |
| | VS5, IS5 | -5 | -2 | 3 | mV |
| | VS12, IS12 | -5 | -2 | 1 | mV |
| Constant Current Generator Voltage (V _{RI}) | | 1.20 | 1.25 | 1.30 | V |



Electrical Characteristics (Continued)

PSON/, Analog Input

| Parameter | Conditions | MIN | TYP | MAX | Unit |
|---------------------------|------------|------|------|------|------|
| Threshold Voltage | | 1.16 | 1.25 | 1.33 | V |
| Hysteresis (V_{HYST}) | | 20 | 50 | 80 | mV |

PGI, Analog Input

| Parameter | Conditions | MIN | TYP | MAX | Unit |
|--------------------------------------|------------|------|------|------|------|
| Threshold Voltage for start T_{d1} | | 1.16 | 1.25 | 1.33 | V |
| Threshold Voltage for start T_{d2} | | 0.60 | 0.63 | 0.75 | V |
| Threshold Voltage for mask OC,UV | | 1.05 | 1.13 | 1.21 | V |
| Hysteresis (V_{HYST})* | | -20 | -50 | -80 | mV |

* All of the comparator for PGI input in block diagram.

PGO, Open Drain Digital Output

| Parameter | Conditions | MIN | TYP | MAX | Unit |
|---------------------------------------|----------------|-----|-----|-----|------|
| Leakage Current (I_{LKG}) | $V_{PGO}=5V$ | | | 5 | uA |
| Low Level Output Voltage (V_{OL}) | $I_{SINK}=5mA$ | | | 0.4 | V |

FPO/, Open Drain Digital Output

| Parameter | Conditions | MIN | TYP | MAX | Unit |
|---------------------------------------|-----------------|-----|-----|-----|------|
| Leakage Current (I_{LKG}) | $V_{FPO}=5V$ | | | 5 | uA |
| Low Level Output Voltage (V_{OL}) | $I_{SINK}=10mA$ | | | 0.3 | V |

Switching Characteristics, $Vcc=12V$, $T_a = \text{Full range}$.

| Parameter | Conditions | MIN | TYP | MAX | Unit |
|--|------------|-----|-----|-----|------|
| PGI to PGO Delay Time (T_{d1}) | | 200 | 300 | 400 | μs |
| Short Circuit Delay Time (T_{d2}) | | 49 | 75 | 100 | μs |
| PGO to FPO/ Delay Time (T_{d3}) | | 2 | 4 | 6 | μs |
| Over Current Delay Time (T_{d4}) | | 13 | 20 | 27 | μs |
| PSON/ De-bounce Time (T_{b1}) | | 24 | 38 | 52 | μs |
| FPO/ Noise De-glitch Time (T_{b2}) | | 9 | 14 | 19 | μs |
| PGO Noise De-glitch Time (T_{b3}) | | 47 | 73 | 100 | μs |




點晶科技股份有限公司
SILICON TOUCH TECHNOLOGY INC.

PS222L

Application

Typical 4 rails SPS (Dual 12V OCP)

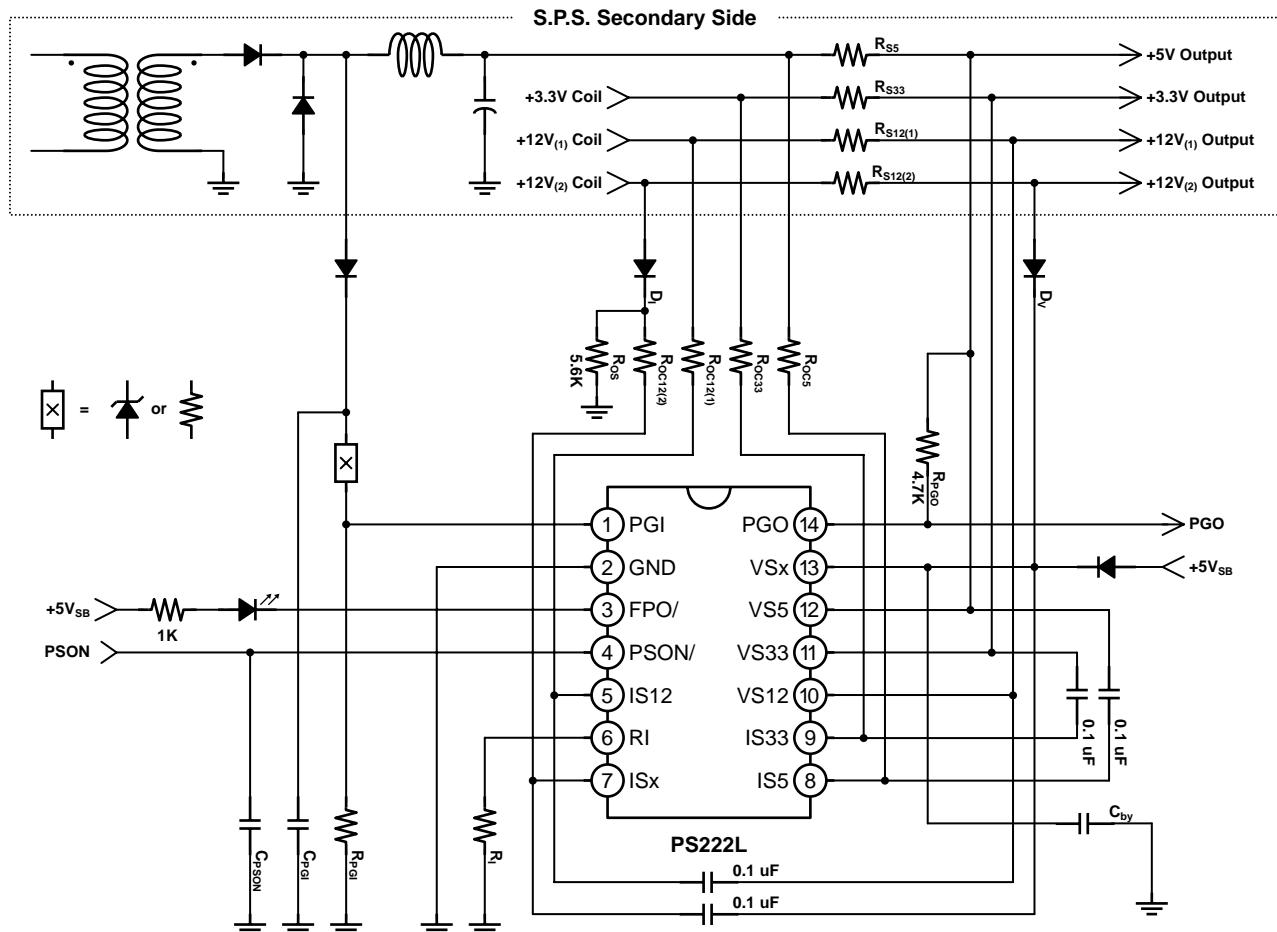




點晶科技股份有限公司
SILICON TOUCH TECHNOLOGY INC.

PS222L

Application (Continued)

Typical 3 rails SPS (Single 12V OCP)

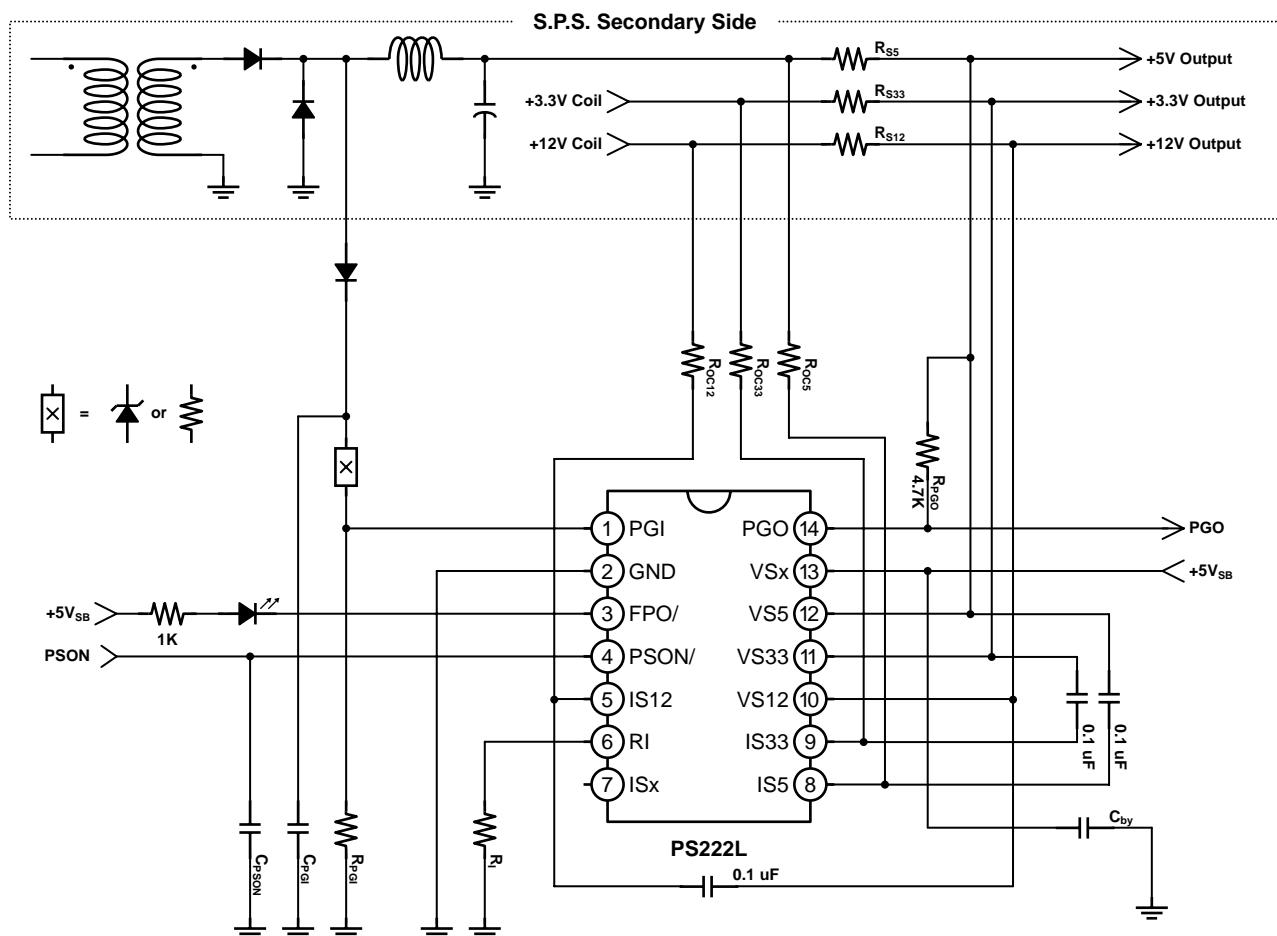



Notes:

1. Zener diode or resistor or both of them can be used in component X.
2. The bypass capacitor C_{by} suggests to be $0.1\mu F \sim 10\mu F$ and layout nearby pin VCC.
3. The recommend sense values of $R_{S12(1)}$, $R_{S12(2)}$, R_{S5} and R_{S33} are $\geq 0.002\Omega$.
4. Over-Current Protection design example:

$$(1) I_{ref} = 20\mu A, R_I = \frac{V_{RL}}{I_{RL}} = \frac{1.25}{20\mu} = 62.5K(\Omega)$$

$$(2) R_{S5} = 0.002\Omega, \Delta V_{5V} = 0.002 \times I_{+5V} = R_{OC5} \times 8 \times I_{ref}$$

$$(3) \text{ If } +5V \text{ OCP trip point is } 20A, R_{OC5} = \frac{0.002 \times 20}{8 \times 20\mu} = 250(\Omega)$$

5. GND path:

- (1) The GND path width is wider as far as it could.
- (2) The better grounding ability has better performance at surge test.

6. PS222L uses single 12VOCP protection function:


As "Typical 3 rails SPS" application circuit, the pin7(ISx) must be connected a resistor(Resistance > $10k\Omega$) to GND OR floating.



點晶科技股份有限公司
SILICON TOUCH TECHNOLOGY INC.

PS222L

Package Specification

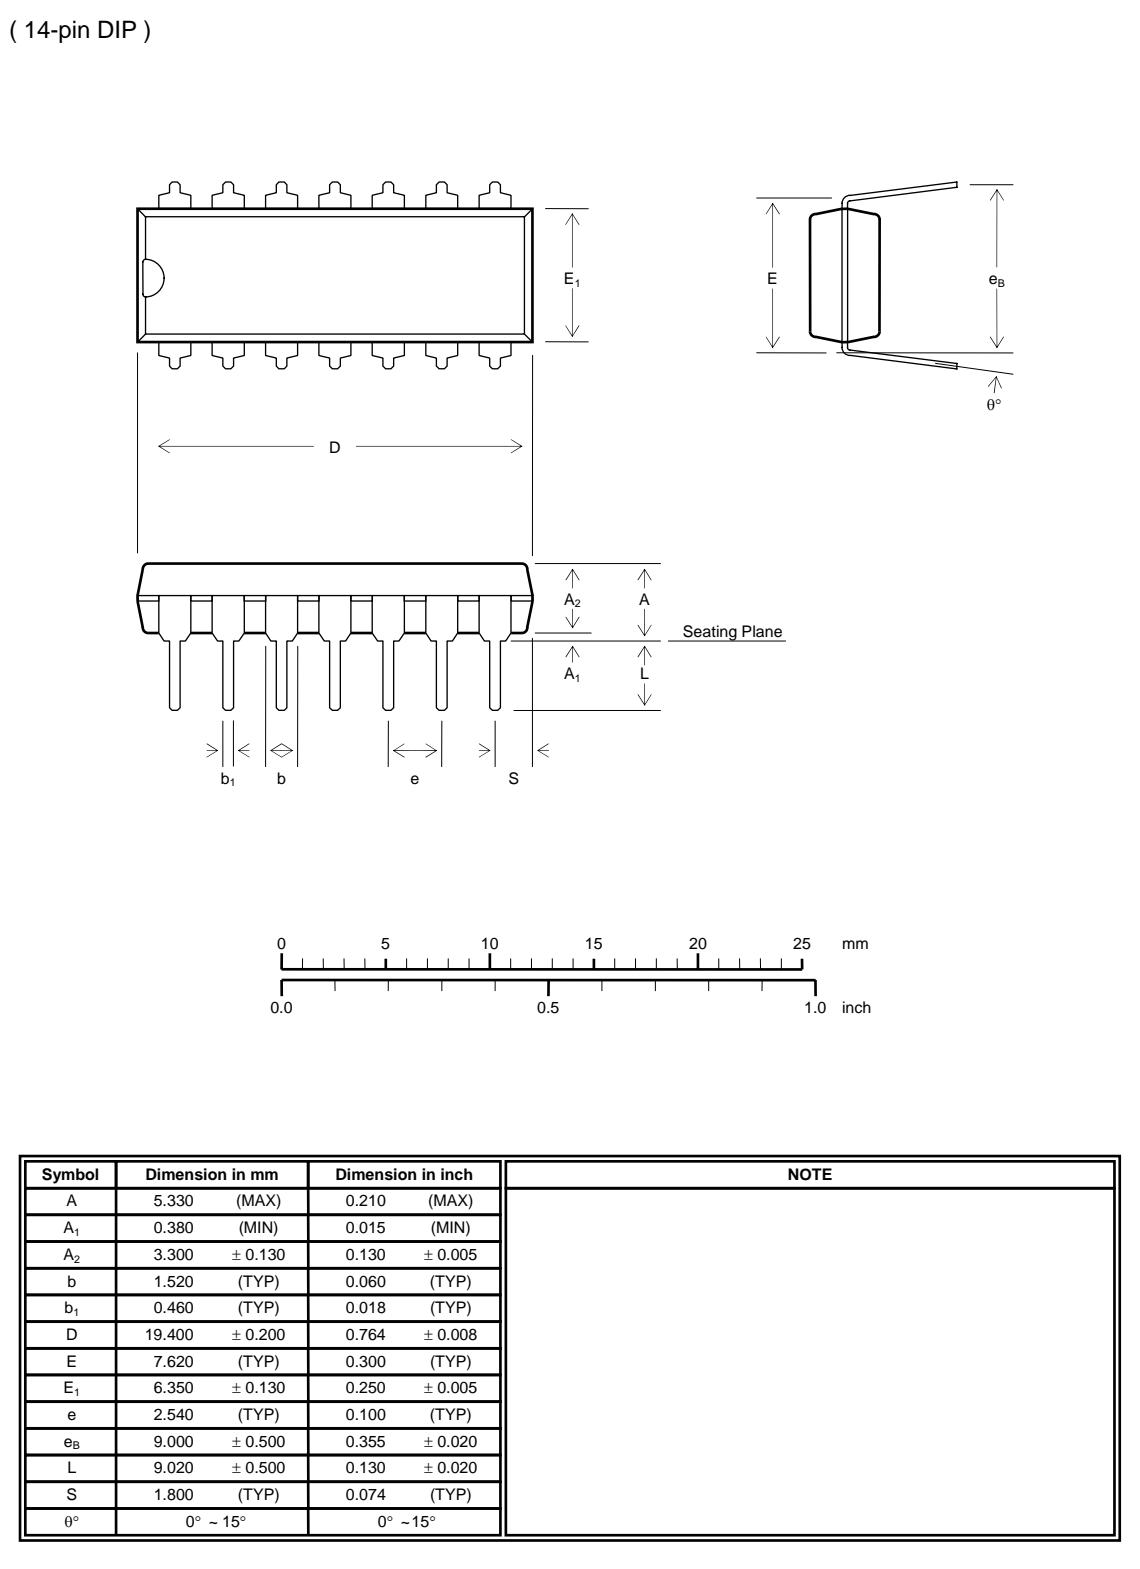




點晶科技股份有限公司
SILICON TOUCH TECHNOLOGY INC.

PS222L

Package Specification (Continued)

(14-pin SOP)

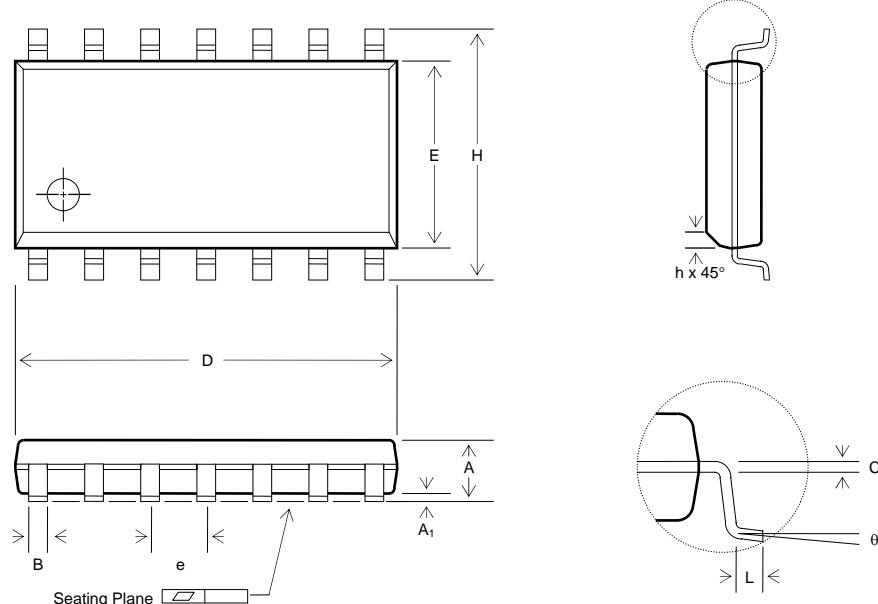

| Symbol | Dimension in mm | | Dimension in inch | | NOTE |
|----------------|-----------------|------|-------------------|--------|------|
| | MIN. | MAX. | MIN. | MAX. | |
| A | 1.35 | 1.75 | 0.0532 | 0.0688 | |
| A ₁ | 0.1 | 0.25 | 0.0040 | 0.0098 | |
| B | 0.33 | 0.51 | 0.013 | 0.020 | |
| C | 0.19 | 0.25 | 0.0075 | 0.0098 | |
| e | 1.27BSC | | 0.050BSC | | |
| D | 8.55 | 8.75 | 0.3367 | 0.3444 | |
| H | 5.80 | 6.20 | 0.2284 | 0.2440 | |
| E | 3.80 | 4.00 | 0.1497 | 0.1574 | |
| L | 0.40 | 1.27 | 0.016 | 0.050 | |
| h | 0.25 | 0.50 | 0.0099 | 0.0196 | |
| θ | 0° | 8° | 0° | 8° | |



The products listed herein are designed for ordinary electronic applications, such as electrical appliances, audio-visual equipment, communications devices and so on. Hence, it is advisable that the devices should not be used in medical instruments, surgical implants, aerospace machinery, nuclear power control systems, disaster/crime-prevention equipment and the like. Misusing those products may directly or indirectly endanger human life, or cause injury and property loss.

Silicon Touch Technology, Inc. will not take any responsibilities regarding the misusage of the products mentioned above. Anyone who purchases any products described herein with the above-mentioned intention or with such misused applications should accept full responsibility and indemnify. Silicon Touch Technology, Inc. and its distributors and all their officers and employees shall defend jointly and severally against any and all claims and litigation and all damages, cost and expenses associated with such intention and manipulation.

Silicon Touch Technology, Inc. reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.