
## VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION		DATE	APPROVED
#5	MODIFY TO LOOK LIKE VENDOR'S DWG	RCM	8/14/98	KGD
#6	ADDED ARTWORK	AK	2/1/99	KGD
#7	ADDED NOTE 5	PEI	7/20/99	JMR

<del>-- .125</del>

(.007)

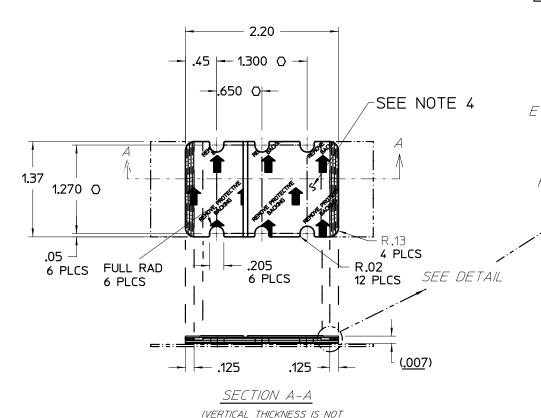

SHOWN TO SCALE)

DETAIL :

- A. SPLIT RELEASE LINER.
- B. ADHESIVE STRIP; .0025 THICK .125 WIDE.
- C. ALUMINUM ALLOY 1145-0; .002 THICK.
- D. ROLL CARRIER WITH ADHESIVE STRIP BONDING.
- E. PHASE CHANGE THERMAL COMPOUND.
- F. ADHESIVE STRIPS ON ROLL CARRIER.

## NOTES:

- O 1. MATERIAL: MAKE FROM POWER DEVICES AL-2-22H-137
- O 2. THICKNESS: .007±.001.
  - 3. SEE DETAIL FOR ASSY ORDER.
  - 4. FOR ARTWORK SHOWN HERE SEE DWG# 20200.
  - 5. O DENOTE CRITICAL CHARACTERISTIC FOR LOT INSPECTION.

DRAWN BY DATE J. RENAUD 2/13/97	VICOR			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES- TOLERANCES ARE: FRACTIONS DECIMALS ANGLES \$1/64 XXX-*.005	THERMAL INTERFACE PAD, ThermMate® (MICRO)			
THIRD ANGLE PROJECTION	SIZE FSCM NO. DWG NO $67131$	REV # 7		
DO NOT SCALE DRAWING	SCALE FULL SHEET 1 OF	1		