



贴片三端电容阵列




技术条件

型号	额定电压 VDC	额定电流 A	静电容量 pF	电路数	插入损耗 (dB)				绝缘电阻 M	温度范围
					50 无负载系统测试					
					1 MHz	10 MHz	100 MHz	1000 MHz		
NFA81R00C220	50	0.3	22	8	0	0	0	14	1000 以上	-55 ~ +125
NFA81R00C470		0.3	47		0	0	2	20		
NFA81R00C101		0.3	100		0	0	6	32		
NFA81R00C471		0.2	470		0	2	18	40		
NFA81R10C102		0.2	1000		0	6	24	42		
NFA81R10C222		0.2	2200		0	12	30	36		
NFA81R10C223		0.3	22000		10	30	58	38		
NFA41R00C220	50	0.2	22	4	0	0	0	14		-55 ~ +85
NFA41R00C470		0.2	47		0	0	2	20		
NFA41R00C101		0.2	100		0	0	6	32		
NFA41R00C471		0.2	470		0	2	18	40		
NFA41R10C102		0.2	1000		0	6	24	42		
NFA41R10C222		0.2	2200		0	12	30	36		
NFA41R10C223		0.2	22000		10	30	58	38		
NFA41R10C104		0.2	100000		25	44	50	40		




外形结构图

NFA81R

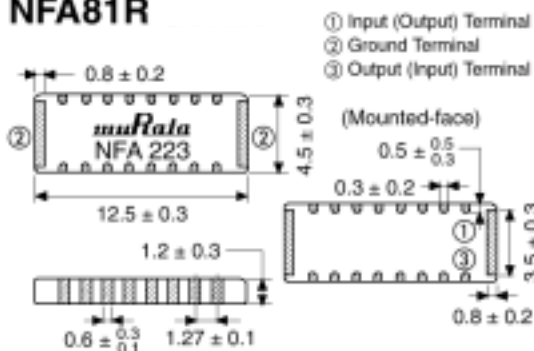

NFA41R

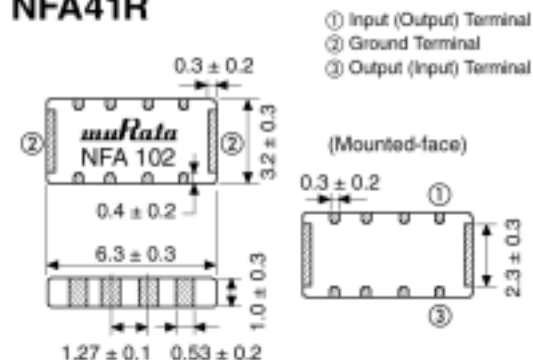

等效电路图

