

Monolithic crystal filter

MQF21.4-1200/06



Application

- 8 pol filter
- i.f.- filter
- use in mobile and stationary transceivers

Limiting values

| | | Unit | Value |
|-----------------------|--------------------|------|------------|
| Center frequency | f_0 | MHz | 21.4 |
| Insertion loss | | dB | ≤ 3.5 |
| Pass band at 3.0 dB | | kHz | ± 6.00 |
| Ripple in pass band | $f_0 \pm 3.00$ kHz | dB | ≤ 2.0 |
| Stop band attenuation | $f_0 \pm 14$ kHz | dB | ≥ 65 |
| | $f_0 \pm 20$ kHz | dB | > 90 |


Terminating impedance Z

| | | |
|----------|--------|-----------|
| R1 C1 | Ohm/pF | 910 15 |
| R2 C2 | Ohm/pF | 910 15 |


| | | |
|-----------------------|-----|------------|
| Operating temp. range | ° C | -25... +70 |
|-----------------------|-----|------------|

Characteristics MQF21.4-1200/06


Pass band

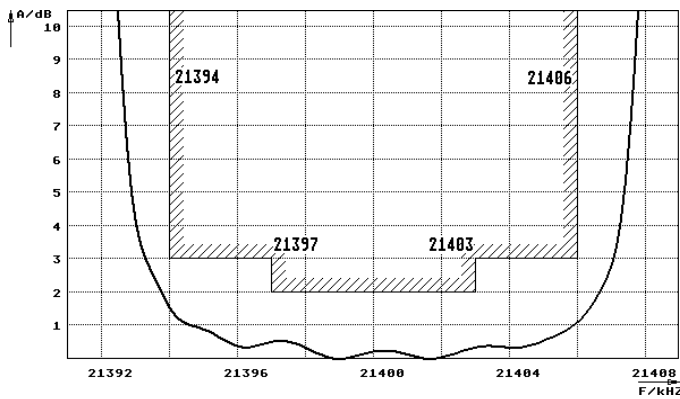

Stop band

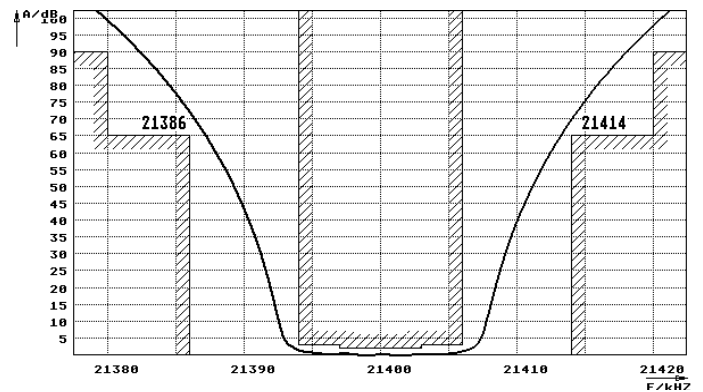

Pin connections: 1 Input
2 Input-E
3 Output
4 Output-E

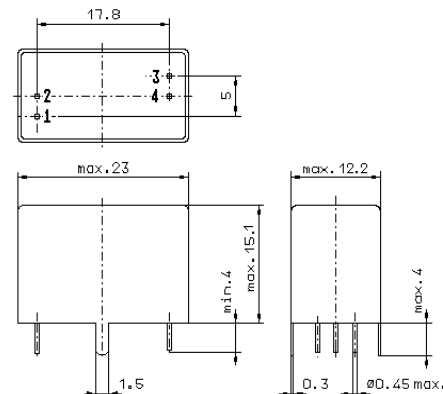

GV6.2