

Description

The GM358 consists of two high gain, internally frequency compensated operational amplifiers which are designed to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also available. The GM358 features low power drain, a common mode input voltage range extending to GND/VEE. The GM358 is equivalent to one-half of the GM324.


Application areas include transducer amplifiers, DC gain blocks and all the conventional op-amp circuits which now can be more easily implemented in single power supply systems. For example, the GM358 can be directly operated of the standard +5V power supply voltage which is used in digital systems and will easily provide the required interface electronics without requiring the additional $\pm 15V$ power supplies.

The GM358 is available in SOP-8 and DIP-8 packages.


Features

- ◆ True Differential Input Stage
- ◆ Internally Frequency Compensated for Unity Gain
- ◆ Single Supply Operation: 3V to 40V
- ◆ Wide Bandwidth (unity Gain, temperature compensated): 1 MHz
- ◆ Short Circuit Protected Outputs
- ◆ Low Input Bias Current
- ◆ Common Mode Range Extends to Negative Supply
- ◆ Single and Split Supply Operation

Typical Application Circuits

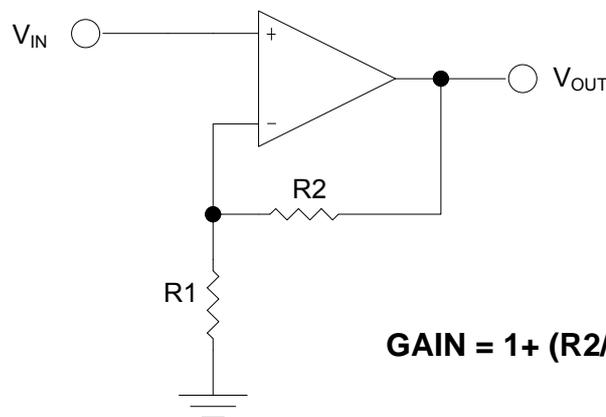

Marking Information and Pin Configurations (Top View)

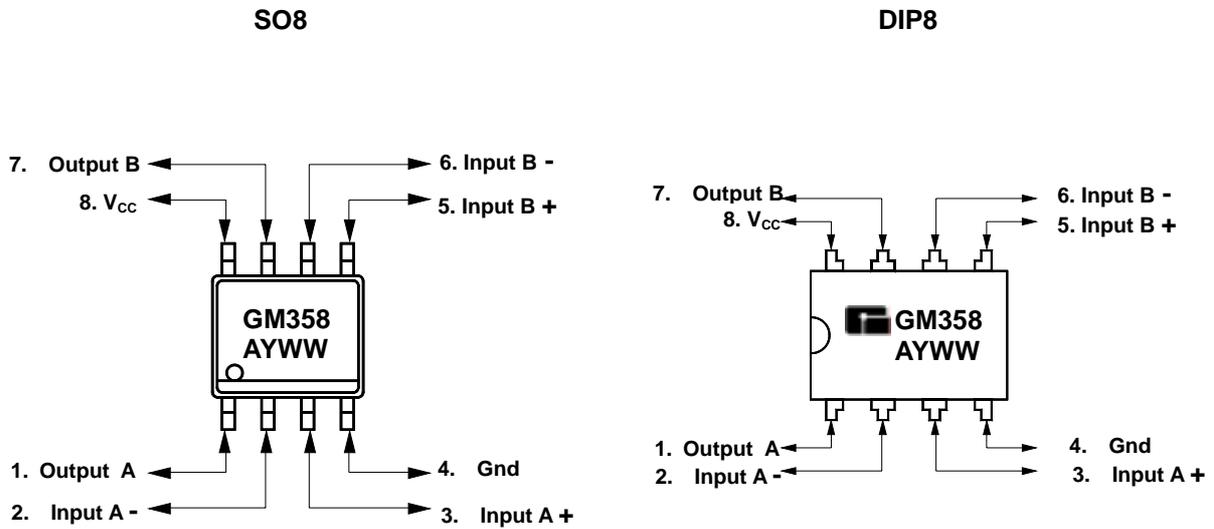

A: Assembly / Test site code
Y: Year
WW: Week

Ordering Information

Ordering Number	Package	Shipping
GM358D8T	DIP-8	60 Units / Tube
GM358S8T	SOP-8	100 Units / Tube
GM358S8R	SOP-8	2,500 Units / Tape & Reel


Absolute Maximum Ratings

PARAMETER	Symbol	RATINGS	UNITS
Supply Voltage	V_{CC}	40	V
	V_{CC}, V_{EE}	± 20	
Input Differential Voltage Range (Note 1)	V_{IDR}	± 32	V
Input Common Mode Voltage Range (Note 2)	V_{ICR}	$= 0.3$ to 32	V
Output Short Circuit Duration	t_{SC}	Continuous	-
Junction Temperature	T_J	150	
Operating Ambient Temperature Range	T_A	- 40 to 125	
Storage Temperature		- 65 to 150	
Lead Temperature (soldering 10 sec.)		260	
ESD Tolerance – Human Body Mode		2,000	V

Note 1: Split Power Supplies

Note 2: For Supply less 40V, the absolute maximum input range is equal to the supply voltage

Block Diagram

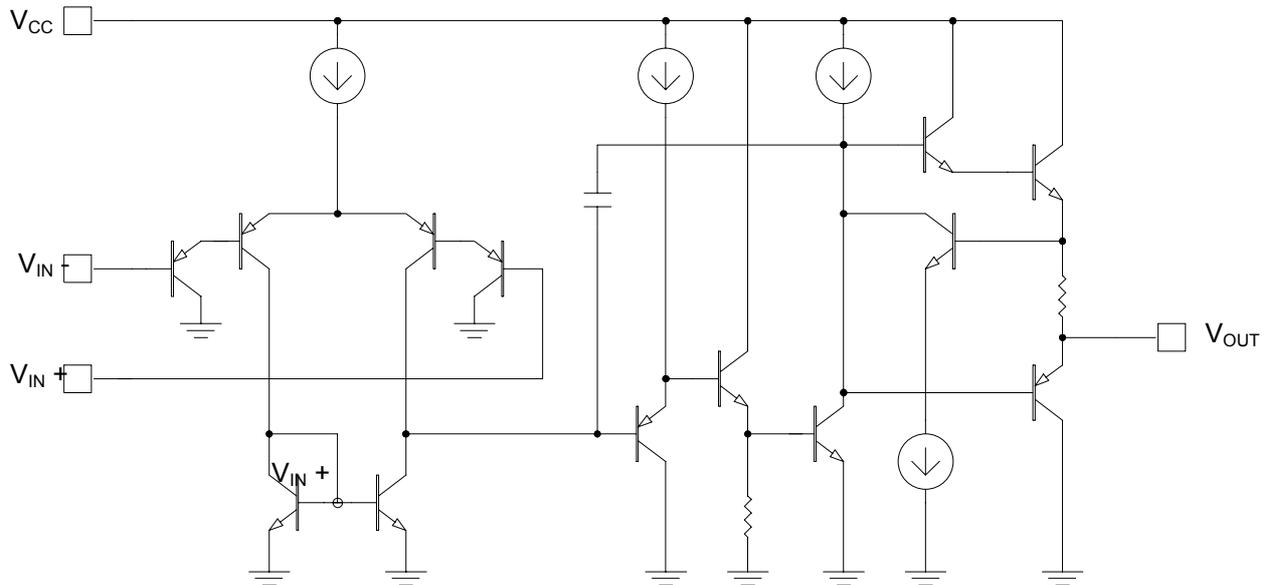

Electrical Characteristics ($V_{CC} = 5V$, at specified free-air temperature, unless otherwise specified)

Parameter	Symbol	Condition	Min	Typ	Max	Unit	
Input offset Voltage	V_{IO}	$V_{CC} = 5V$ to Max $V_{IC} = V_{ICR}$ min $V_O = 1.4V$	$T_A = 25$		3	7	mV
			Full Range			9	
Average Temperature Coefficient of Input offset Voltage	αV_{IO}		Full Range		7		$\mu V/^\circ C$
Input Offset Current	I_{IO}		$T_A = 25$		2	50	nA
			Full Range			150	
Average Temperature Coefficient of Input offset Current	αI_{IO}		Full Range		10		$pA/^\circ C$
Input Bias Current	I_{IB}	$V_O = 1.4V$	$T_A = 25$		-20	-250	nA
			Full Range			-500	
Common-Mode Input Voltage Range	V_{ICR}	$V_{CC} = 5V$ to Max	$T_A = 25$	0 to $V_{CC}-1.5V$			V
			Full Range	0 to $V_{CC}-2.0V$			
High-Level output Voltage	V_{OH}	$R_L = 2K$	$T_A = 25$	$V_{CC}-1.5V$	-	-	V
		$V_{CC} = MAX, R_L = 2K$	Full Range	26			
		$V_{CC} = MAX, R_L = 10K$	Full Range	27	28		
High-Level output Voltage	V_{OL}	$R_L = 10K$	Full Range		5	20	mV
Large-Signal Differential Voltage Amplification	A_{VD}	$V_{CC} = 15V,$ $V_O = 1V$ to $11V$ $R_L \geq 2K$	$T_A = 25$	25	100		V/mV
			Full Range	15			
Common Mode Rejection Ratio	CMRR	$V_{CC} = 5V$ to Max $V_{IC} = V_{ICR}$ min	$T_A = 25$	65	80		dB
Supply Voltage Rejection Ratio	K_{SVR}	$V_{CC} = 5V$ to Max	$T_A = 25$	65	100		dB
Crosstalk Attenuation	V_{O1}/V_{O2}	$f = 1KHz$ to $20KHz$	$T_A = 25$		120		dB
Output Current	I_O	$V_{CC} = 15V, V_{ID} = 1V,$ $V_O = 0V$	$T_A = 25$	-20	-30		mA
			Full Range	-10			
		$V_{CC} = 15V, V_{ID} = -1V,$ $V_O = 15V$	$T_A = 25$	10	20		mA
			Full Range	5			
		$V_{ID} = -1V, V_O = 200mV$	Full Range	12	30		μA
Short-Circuit output Current	I_{OS}	V_{CC} at $5V, Gnd$ at $-5V,$ $V_O = 0V$	$T_A = 25$		± 40	± 60	mA
Supply Current (four amplifiers)	I_{CC}	$V_O = 2.5V, No$ Load	Full Range		1.5	2.4	mA
		$V_{CC} = Max,$ $V_O = 0.5V_{CC}, No$ Load	Full Range		1.1	3	

* All characteristics are measured under open loop conditions with zero common-mode input voltage unless otherwise specified. "MAX" V_{CC} for testing purposes is 30V.

Typical Performance Characteristics

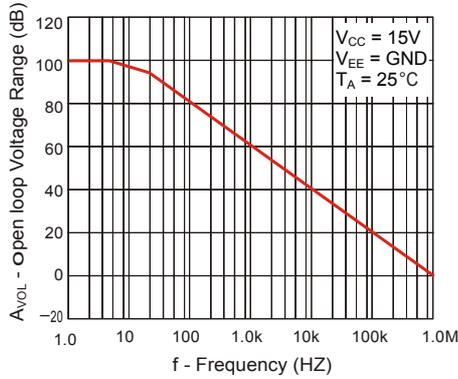


Figure 1. Large-Signal Open Loop Voltage Gain

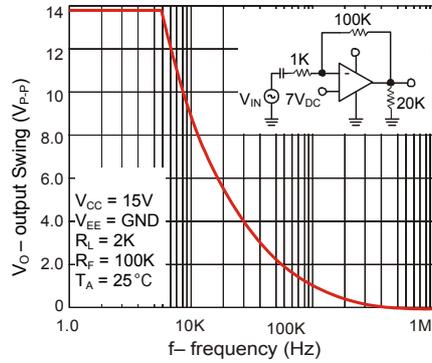


Figure 2. Large-Signal Frequency Response

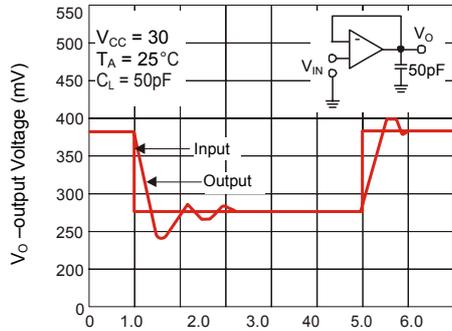


Figure 3. Small Signal Voltage Follower Pulse Response (Noninverting)

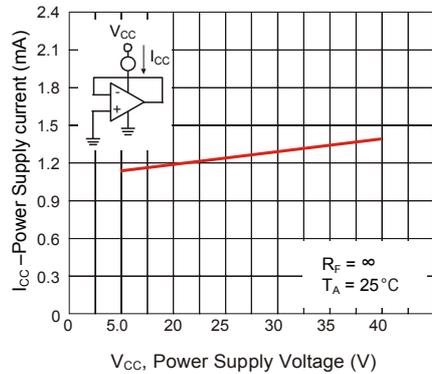


Figure 4. Power Supply Current versus Power Supply Voltage

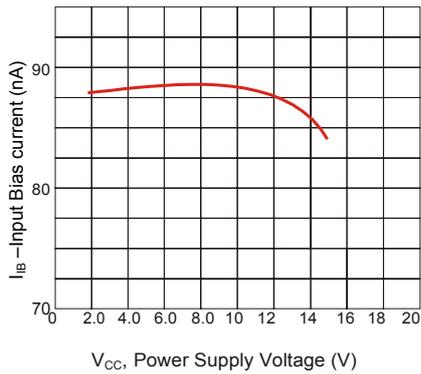


Figure 5. Input Bias Current versus Supply Voltage

Application Information

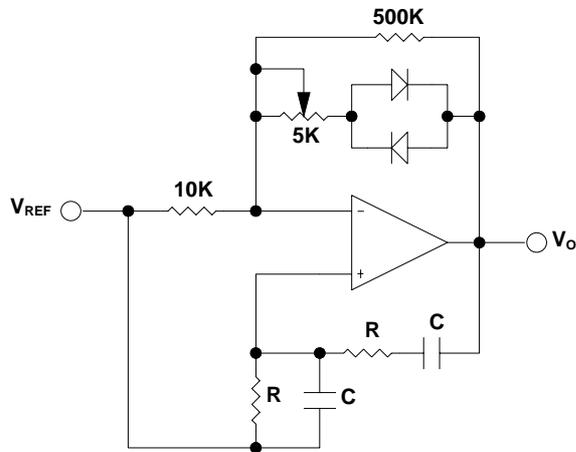


Fig.1 Wien Bridge Oscillator

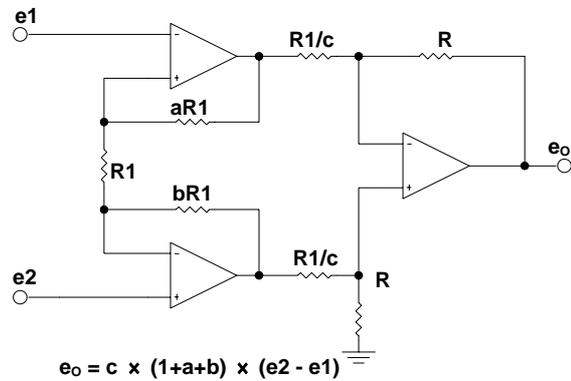


Fig. 2 High Impedance Differential Amplifier

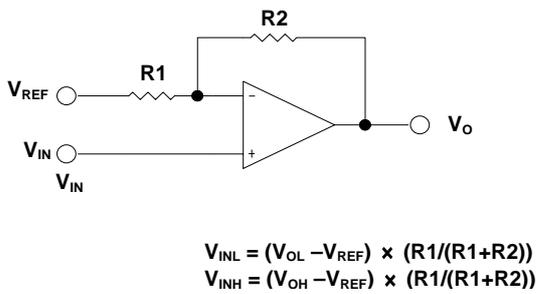


Fig. 3 Comparator with Hysteresis

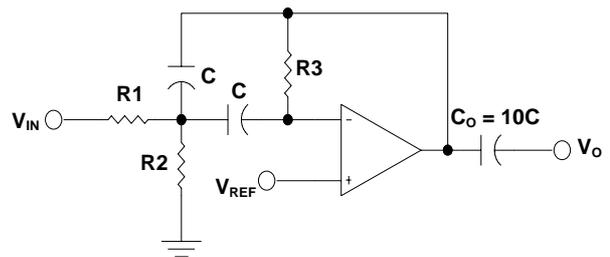


Fig. 4 Multiple Feedback Bandpass Filter

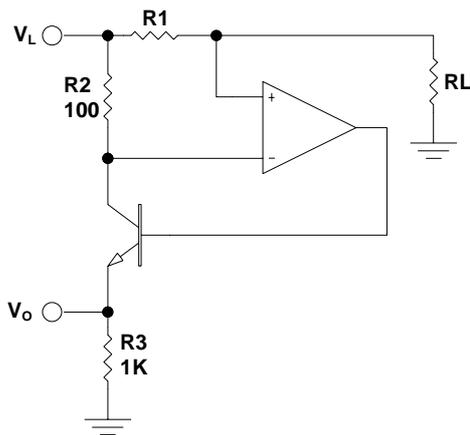


Fig. 5 Current Monitor



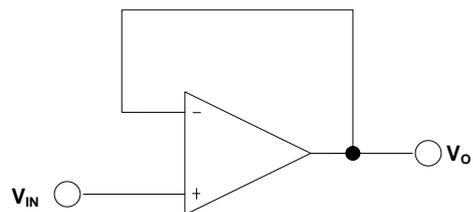


Fig. 6 Voltage Follower

Package Outline Dimensions – SO 8

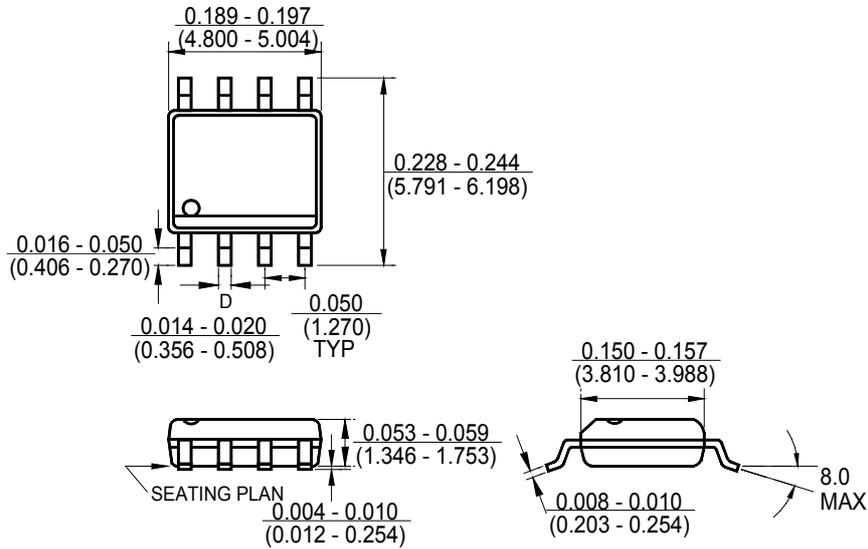

Package Outline Dimensions – DIP 8

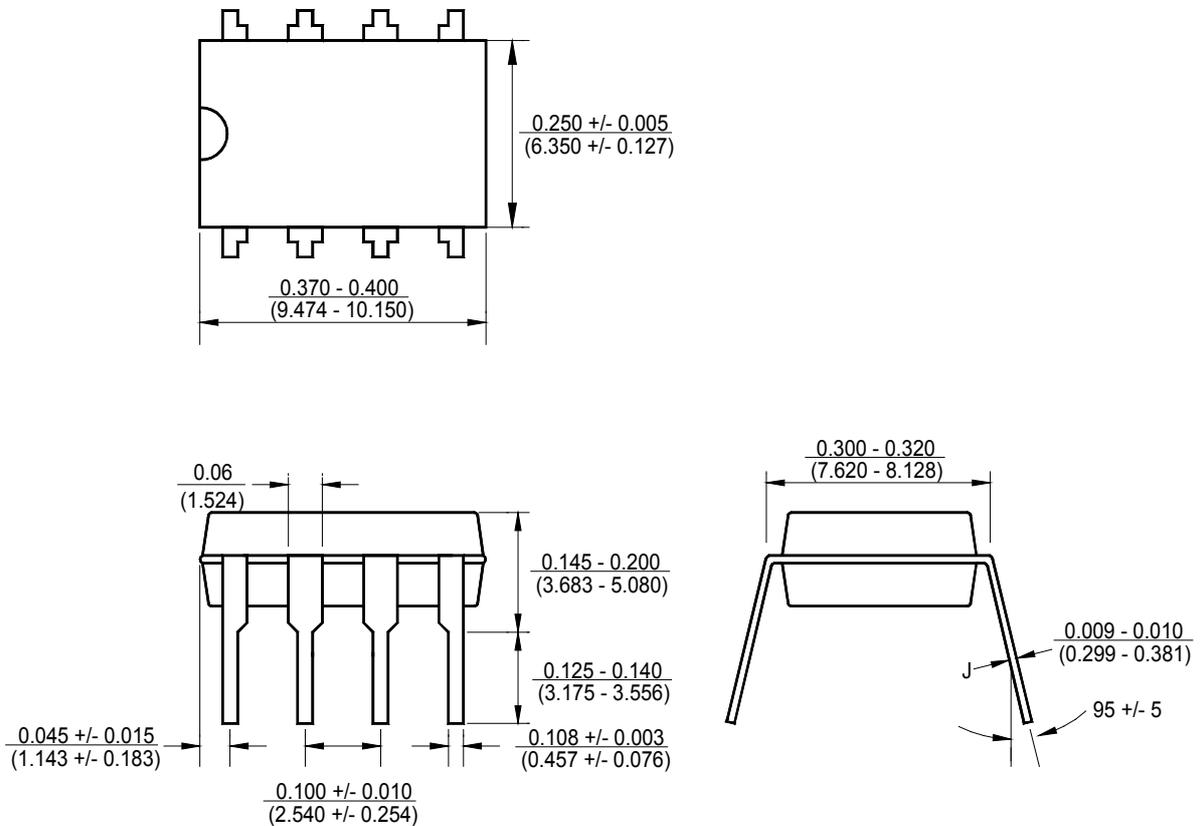

Ordering Number

GM 358 S8 R

APM Gamma
Micro

Circuit Type

Package
Type

S8: SO 8
D8: DIP 8

Shipping Type

R: Taping & Reel
T: Tube