Zener diodes

UMZ30K

Applications

Constant voltage control


● Features

- 1) Ultra Small mold type. (UMD4)
- 2) High reliability


Construction

Silicon epitaxial planar

●Dimensions (Unit:mm)




●Land size figure (Unit : mm)



●Structure



● Taping dimensions (Unit: mm)

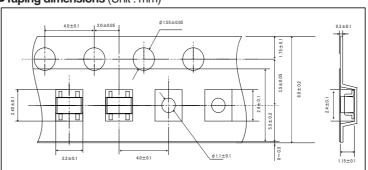

● Absolute maximum ratings (Ta=25°C)

| Parameter | Symbol | Limits | Unit |
|-----------------------|--------|-------------|------|
| Power dissipation | Р | 200 | mW |
| Junction temperature | Tj | 150 | °C |
| Storage temperature | Tstg | -55 to +150 | °C |
| Operating temperature | Topr | -55 to +150 | °C |


●Electrical characteristics (Ta=25°C)


| | Symbol | | | | |
|---------|-----------------------|--------|--------|--------------------------|-------|
| TYP. | Zener voltage : Vz(V) | | | Reverse current : IR(uA) | |
| | MIN. | MAX. | Iz(mA) | MAX. | VR(V) |
| UMZ3.6K | 3.600 | 3.845 | 5.0 | 10.0 | 1.0 |
| UMZ3.9K | 3.890 | 4.160 | 5.0 | 5.0 | 1.0 |
| UMZ4.3K | 4.170 | 4.430 | 5.0 | 5.0 | 1.0 |
| UMZ4.7K | 4.550 | 4.750 | 5.0 | 2.0 | 1.0 |
| UMZ5.1K | 4.980 | 5.200 | 5.0 | 2.0 | 1.5 |
| UMZ5.6K | 5.490 | 5.730 | 5.0 | 1.0 | 2.5 |
| UMZ6.2K | 6.060 | 6.330 | 5.0 | 1.0 | 3.0 |
| UMZ6.8K | 6.650 | 6.930 | 5.0 | 0.5 | 3.5 |
| UMZ7.5K | 7.280 | 7.600 | 5.0 | 0.5 | 4.0 |
| UMZ8.2K | 8.020 | 8.360 | 5.0 | 0.5 | 5.0 |
| UMZ9.1K | 8.850 | 9.230 | 5.0 | 0.5 | 6.0 |
| UMZ10K | 9.770 | 10.210 | 5.0 | 0.1 | 7.0 |
| UMZ11K | 10.760 | 11.220 | 5.0 | 0.1 | 8.0 |
| UMZ12K | 11.740 | 12.240 | 5.0 | 0.1 | 9.0 |
| UMZ13K | 12.910 | 13.490 | 5.0 | 0.1 | 10.0 |
| UMZ15K | 14.340 | 14.980 | 5.0 | 0.1 | 11.0 |
| UMZ16K | 15.850 | 16.510 | 5.0 | 0.1 | 12.0 |
| UMZ18K | 17.560 | 18.350 | 5.0 | 0.1 | 13.0 |
| UMZ20K | 19.520 | 20.390 | 5.0 | 0.1 | 15.0 |
| UMZ22K | 21.540 | 22.470 | 5.0 | 0.1 | 17.0 |
| UMZ24K | 23.720 | 24.780 | 5.0 | 0.1 | 19.0 |
| UMZ27K | 26.190 | 27.530 | 5.0 | 0.1 | 21.0 |
| UMZ30K | 29.190 | 30.690 | 5.0 | 0.1 | 23.0 |
| UMZ33K | 32.150 | 33.790 | 5.0 | 0.1 | 25.0 |
| UMZ36K | 35.070 | 36.870 | 5.0 | 0.1 | 27.0 |


⁽¹⁾ The zener voltage(Vz) is measured 40ms after power is supplied.

●MARKING (TYPE NO.)

| TYPE | TYPE NO. | TYPE | TYPE NO. |
|----------|----------|---------|----------|
| UMZ 3.6K | 5U | UMZ 12K | 2L |
| UMZ 3.9K | 5V | UMZ 13K | 5B |
| UMZ 4.3K | 5W | UMZ 15K | 2M |
| UMZ 4.7K | 5X | UMZ 16K | 2N |
| UMZ 5.1K | 5Y | UMZ 18K | 2P |
| UMZ 5.6K | 3V | UMZ 20K | 2Q |
| UMZ 6.2K | 5Z | UMZ 22K | 2R |
| UMZ 6.8K | 3X | UMZ 24K | 2S |
| UMZ 7.5K | 2E | UMZ 27K | 2T |
| UMZ 8.2K | 2H | UMZ 30K | 2U |
| UMZ 9.1K | 5E | UMZ 33K | 2V |
| UMZ 10K | 3Z | UMZ 36K | 2W |
| UMZ 11K | 2K | | |

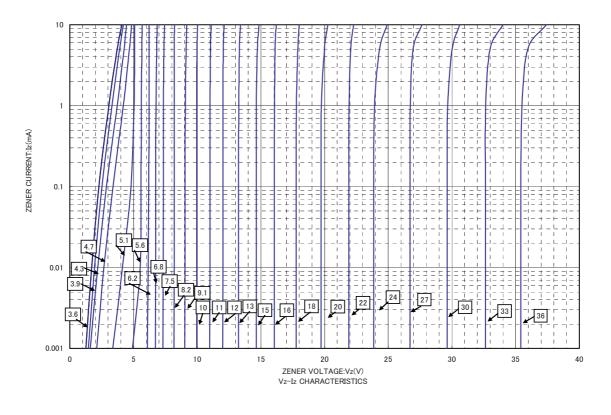

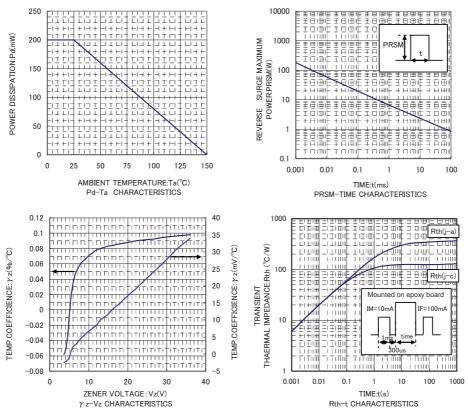

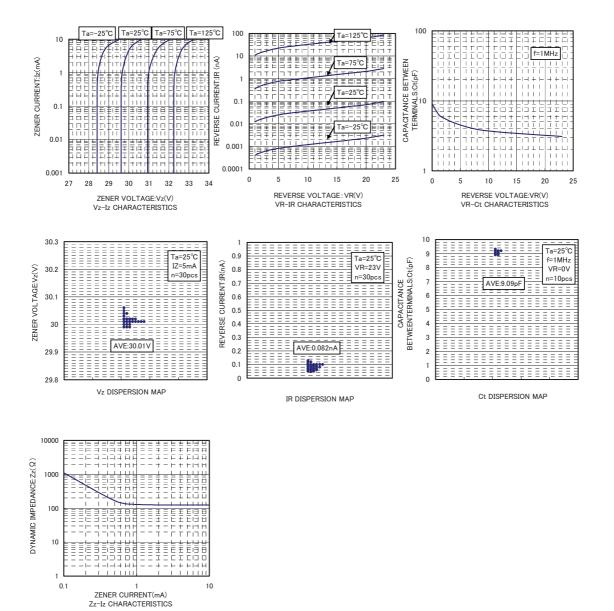

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
 means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
 product described in this document are for reference only. Upon actual use, therefore, please request
 that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
 use and operation. Please pay careful attention to the peripheral conditions when designing circuits
 and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2008 ROHM CO.,LTD.

ROHM CO., LTD. 21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan

TEL:+81-75-311-2121 FAX:+81-75-315-0172

