EVERLIGHT

EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet TOP Views LEDs

Features

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free

Descriptions

• The 67-21 series is available in soft orange, green,blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes it ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.


Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

Device Selection Guide

Device Selection Guide					
	Chip	Lens Color			
Material	Emitted Color	Lens Color			
AlGaInP	Brilliant Orange	Water Clear			

Everlight Electronics Co., Ltd. Device No. : DSE-671-244 http://www.everlight.com prepared date:12-17-2004 Rev. 1 Page: 1 of 10 Prepared by: Bennett




67-21/S2C-FQ2R2B/2T



EVERLIGHT ELECTRONICS CO.,LTD.

67-21/S2C-FQ2R2B/2T

Package Dimensions

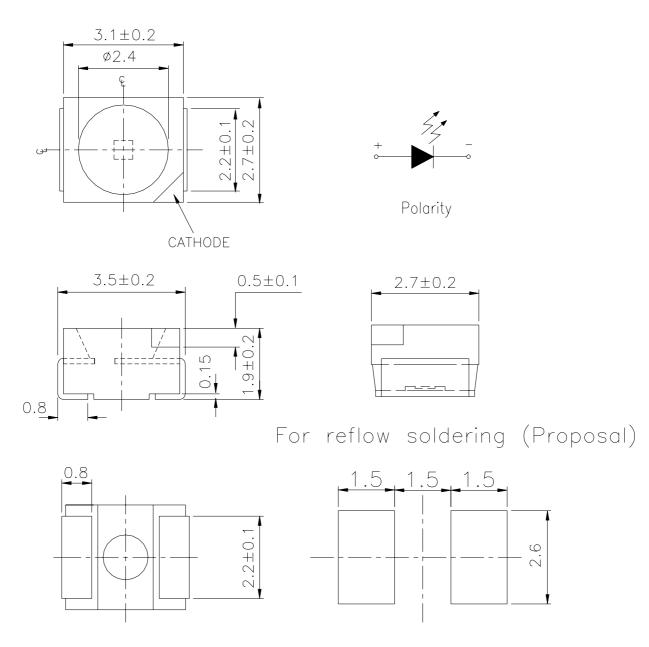

Note: The tolerances unless mentioned is ± 0.1 mm Unit = mm

http://www.everlight.com prepared date:12-17-2004 Rev. 1 Page: 2 of 10 Prepared by: Bennett

Absolute Maximum Ratings (Ta=25°C)						
Parameter	Symbol	Rating	Unit			
Reverse Voltage	V _R	5	V			
Forward Current	$I_{\rm F}$	50	mA			
Operating Temperature	Topr	-40 ~ +85	°C			
Storage Temperature	Tstg	-40~ +100	°C			
Soldering Temperature	Tsol	260 (for 5 second)	°C			
Electrostatic Discharge	ESD	2000	V			
Power Dissipation	Pd	120	mW			
Peak Forward Current(Duty 1/10 @ 1KHz)	$I_{\rm FP}$	100	mA			

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	I _V	90		180	mcd	IF=20mA
Viewing Angle	2 <i>θ</i> 1/2		120		deg	IF=20mA
Peak Wavelength	λp		611		nm	IF=20mA
Dominant Wavelength	λd	603		609	nm	IF=20mA
Spectrum Radiation Bandwidth	$ riangle \lambda$		17		nm	IF=20mA
Forward Voltage	VF	1.75	2.0	2.35	V	IF=20mA
Reverse Current	Ir			10	μA	Vr=5V

Notes:

1.Tolerance of Luminous Intensity ±10%

- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.1V



Bin Range Of Dominant Wavelength

	U		0			
	Group	Bin Code	Min.	Max.	Unit	Condition
	F	EE1	603	606	nm	IF=20mA
		EE2	606	609	nm	IF=20IIIA

Bin Rang Of Luminous Intensity

0	U			
Bin	Min	Max	Unit	Condition
Q2	90	112		
R1	112	140	mcd	IF=20mA
R2	140	180		

Bin Rang Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition
В	0	1.75	1.95	V	
	1	1.95	2.15		IF=20mA
	2	2.15	2.35		


Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

Typical Electro-Optical Characteristics Curves

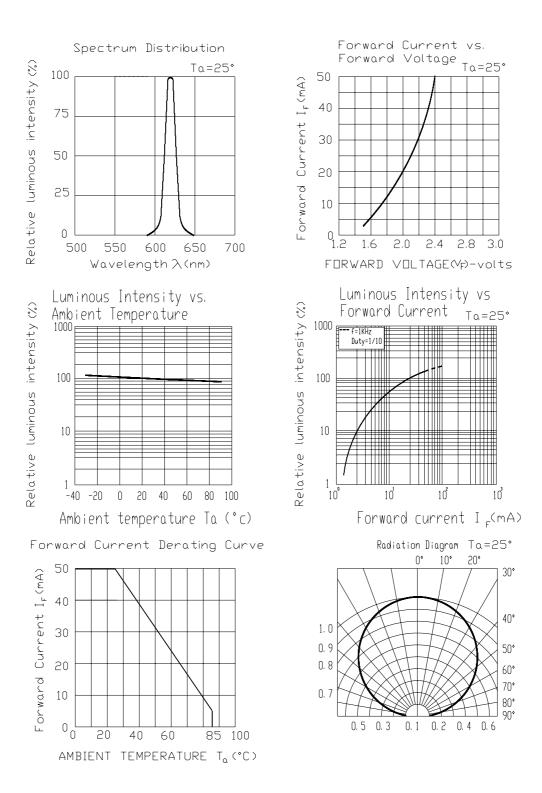

Everlight Electronics Co., Ltd. Device No. : DSE-671-244 http://www.everlight.com prepared date:12-17-2004 Rev. 1 Page: 5 of 10 Prepared by: Bennett



EVERLIGHT ELECTRONICS CO., LTD.


67-21/S2C-FQ2R2B/2T

Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



Reel Dimensions

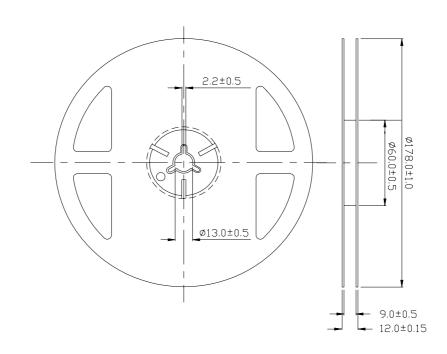


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-671-244 http://www.everlight.com prepared date:12-17-2004 Rev. 1 Page: 6 of 10 Prepared by: Bennett




Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

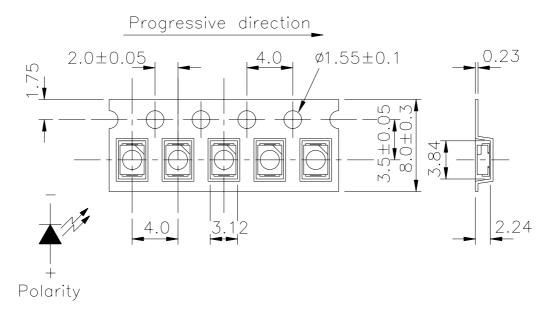

Note: The tolerances unless mentioned is ± 0.1 mm Unit = mm

Moisture Resistant Packaging

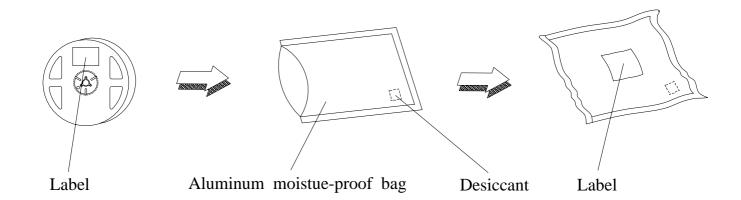

http://www.everlight.com prepared date:12-17-2004 Rev. 1 Page: 7 of 10 Prepared by: Bennett



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30° C or less and 90% RH or less.
 - 2.3 The LEDs should be used within a year.
 - 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
 - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
 - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

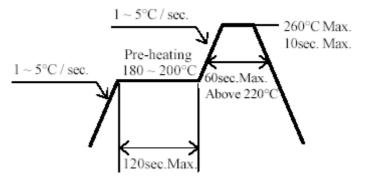

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

http://www.everlight.com prepared date:12-17-2004 Rev. 1 Page: 9 of 10 Prepared by: Bennett




4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

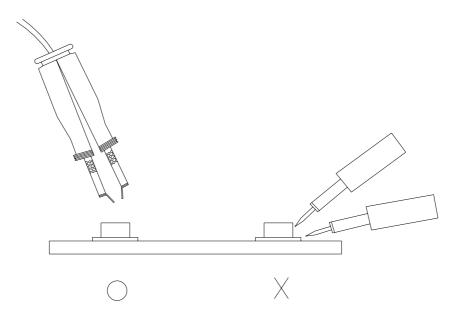

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. : DSE-671-244 http://www.everlight.com prepared date:12-17-2004 Rev. 1 Page: 10 of 10 Prepared by: Bennett