# \_Preliminary datasheet

# Features/Benefits

- Low profile
- Cost efficient
- J or G terminations
- Tape and reel
- IP 67

# **Typical Applications**

- Smart meters
- Home appliances
- Consumer electronics



# **Specification**

FUNCTION: momentary action

CONTACT ARRANGEMENT: 1 make contact = SPST, N.O.

TERMINALS: J bend & Gullwing type for SMT

# Mechanical

Туре	Operating Force FA (Newtons)	Operating Life	Travel (mm)
	Min. Max.	Operations	
KSEM31JLFS	$1.5 \pm 0.5$	300,000	0.3 + 0.1/-0.2
KSEM31GLFS	$1.5 \pm 0.5$	300,000	0.3 + 0.1/-0.2

NOTE: For cost effectiveness the tactile feeling is not specified and can change along production. If your application requires a defined tactile effect, please consider KSC series for your application.

### **Electrical**

MAXIMUM POWER: 1 VA

MINIMUM/MAXIMUM VOLTAGE: 20 mV / 32 VDC MINIMUM/MAXIMUM CURRENT: 1 mA /50 mA DIELECTRIC STRENGTH (50 Hz, 1 min.): 250 V CONTACT RESISTANCE: < 100 m $\Omega$ 

INSULATION RESISTANCE (100 V):  $> 10^{9} \Omega$ 

BOUNCE TIME: < 1 ms

### **Environmental**

OPERATING TEMPERATURE: -40°C to 85°C STORAGE TEMPERATURE: -50°C to 85°C

### **Process**

SOLDERING: Depending on the application, this component is suited to the following methods:

- Cleaning according to typical washing processes.
- Infrared Reflow Soldering in accordance with IEC 61760-1.

# **Packaging**

In reels of 2,000 pieces


Dimensions of reels according to EIA RS481 or IEC 2863. External diameter 330 mm  $\pm$  2 mm.

### NOTE

Specifications listed above are for switches with standard options. KSE series is not subject to adaptation and/or modification for specific use. If you require additional features, please refer to the KSC series. KSE is not recommended for applications requiring high level of performance such as aerospace, automotive and some industrial applications.

# **How To Order**


Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

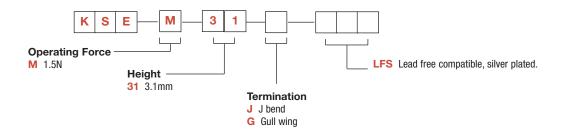





В


# J J BEND









# **G** GULLWING







# **TAPE & REEL**

