




Product Description

Stanford Microdevices' SSW-208 is a high performance Gallium Arsenide Field Effect Transistor MMIC switch housed in a low-cost surface-mountable small outline plastic package.

This single-pole, double-throw, non-reflective switch consumes less than 50uA and operates at -5V and 0V for control bias. Its high isolation and low insertion loss makes it ideal for T/R switching in analog and digital wireless communication systems.

The die is fabricated using 0.5 micron FET process with gold metallization and silicon nitride passivation to achieve excellent performance and reliability.

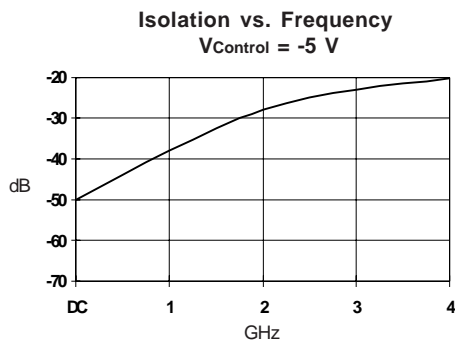

Electrical Specifications at Ta = 25C

Symbol	Parameters: Test Conditions	Units	Min.	Typ.	Max.
Ins	Insertion Loss	f = 0.05-1.0GHz		0.8	1.3
		f = 1.00-2.0GHz	dB	0.9	1.4
		f = 2.00-4.0GHz	dB	1.4	
Isol	Isolation	f = 0.05-1.0GHz	dB	25	40
		f = 1.00-2.0GHz	dB	20	30
		f = 2.00-4.0GHz	dB		25
VSWRon	Input & Output VSWR (on or low loss state)	f = 0.05-1.0GHz f = 1.00-2.0GHz f = 2.00-4.0GHz		1.15 1.25 1.50	
P1dB	Output Power at 1dB Compression f = 0.5-4.0GHz	V = -5V	dBm	+26	
		V = -8V	dBm	+29	
TOIP	Third Order Intercept Point f = 0.5-4.0GHz	V = -5V	dBm	+45	
		V = -8V	dBm	+48	
Id	Device Current			40	
IsW	Switching Speed 50% control to 10%/90% RF		nsec	3	

The information provided herein is believed to be reliable at press time. Stanford Microdevices assumes no responsibility for inaccuracies or omissions. Stanford Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Stanford Microdevices does not authorize or warrant any Stanford Microdevices product for use in life-support devices and/or systems.
Copyright 1999 Stanford Microdevices, Inc. All worldwide rights reserved.

522 Almanor Ave., Sunnyvale, CA 94086

Phone: (800) SMI-MMIC

<http://www.stanfordmicro.com>

SSW-208

DC-4 GHz, High Isolation GaAs MMIC SPDT Switch



Product Features

- High Isolation: 22dB at 2GHz
- Low DC Power Consumption
- Low Insertion Loss: 0.9dB at 2GHz
- Broad Performance - True DC Operation
- Low Cost Small Outline Plastic Package

Applications

- Analog/Digital Wireless System
- Spread Spectrum
- GPS



SSW-208 DC-6 GHz Absorptive SPDT GaAs Switch

Absolute Maximum Ratings

RF Input Power	2W Max >500MHz
Control Voltage	-10V
Operating Temperature	-45C to +85C
Storage Temperature	-65C to +150C
Thermal Resistance	20 deg C/W



Truth Table

V1	V2	J1-J2	J1-J3
0	-5	Low Loss	Isolation
-5	0	Isolation	Low Loss

Pin Out


Pin	Function
1	GND
2	J1
3	GND
4	GND
5	J2
6	V1
7	V2
8	J3

Switch Schematic

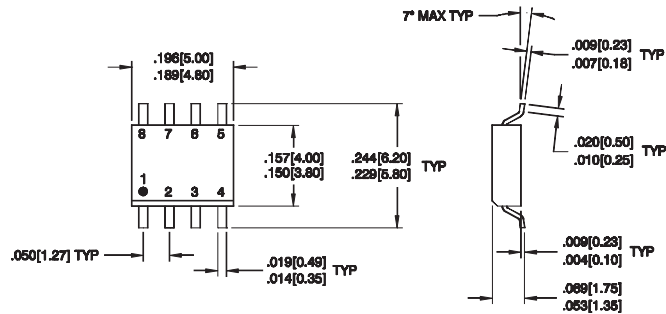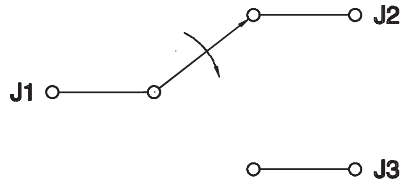

Switches

Insertion Loss vs. Frequency
V_{Control} = -5 V

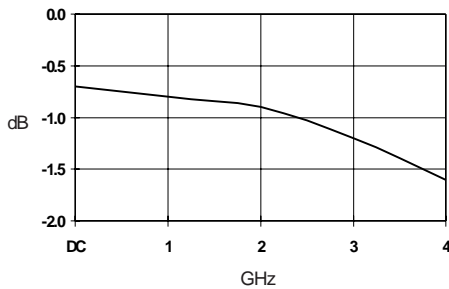

On Port Input/Output VSWR vs. Frequency
V_{Control} = -5 V

