Plug-In **RF Transformer**

50Ω

0.01 to 50 MHz

- D

NOTE: PIN NUMBERS DO NOT APPEAR ON UNIT, FOR REFERENCE ONLY. INDEX MARK INDICATES PIN 6.

Е

042

1.07

Μ

.35

8.89

G

100

2.54

wt

grams

0.50

F

020

-O SEC

 \cap

Maximum Ratings

Operating Temperature	-20°C to 85°C				
Storage Temperature	55°C to 100°C				
RF Power	250mW				
DC Current	30mA				
Permanent damage may occur if any of these limits are exceeded.					

Pin Connections

MCL

6 5 4

в

.1

С

 \cap

.04

1.02

27

6.86

А

30

н

.05

1.27

7.62

INDEX

PRIMARY DOT	4
PRIMARY	6
PRIMARY CT	5
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2

Outline Drawing

Outline Dimensions (inch)

D

Т

.300

7.62

Config. B

010

С

23

κ

.11

2.79

5.84


Features

- excellent return loss
- also available with flat-pack (W38) & surface mount gull-wing (KK81) leads

Applications

• HF/VHF

- impedance matching
- radio communication





CASE STYLE: X65

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Transformer Electrical Specifications

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
2.5	0.01-50	0.01-50	0.025-25	0.05-10

* Insertion Loss is referenced to mid-band loss, 0.2 dB typ.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)		
0.01	1.85	2.83		
0.02	0.74	6.20		
0.03	0.52	7.77		
0.05	0.22	12.98		
0.10	0.15	19.05		
10.00	0.26	14.59		
25.00	0.67	8.03		
25.89	0.71	7.73		
48.08	0.65	3.91		
50.00	1.74	3.73		

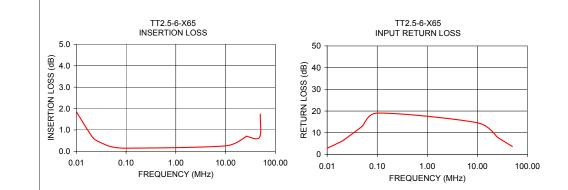

Notes

A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp

,,,,)Mini-Circuits

REV. B M151107 TT2.5-6-X65 IG/TD/CP Page 1 of 1