

■ INTRODUCTION

SN67010 is a 10 seconds single chip voice synthesizer IC which contains I/O pins and a tiny controller. By programming through the tiny controller, user's applications including section combination, trigger modes, output status, and other logic functions can then be easily implemented.

■ FEATURES

- Single power supply 2.4V 5.1V
- Built in a tiny controller
- 10 seconds voice capacity are provided
- Two 4-bit I/O ports are provided
- ◆ 64*4 bits RAM are provided
- Maximum 16k program ROM is provided
- Readable ROM code data
- Built in a high quality speech synthesizer
- Adaptive playing speed from 2.5k-20kHz is provided
- Fixed current D/A output is provided to drive external connected transistor for sound output
- Low Voltage Reset is provided

■ PIN ASSIGNMENT

Symbol	I/O	Function Description			
P20	I/O	Bit0 of I/O port 2			
P21	I/O	Bit1 of I/O port 2			
P22	I/O	Bit2 of I/O port 2			
P23	I/O	Bit3 of I/O port 2			
P30	I/O	Bit0 of I/O port 3			
P31	I/O	Bit1 of I/O port 3			
P32	I/O	Bit2 of I/O port 3			
P33	I/O	Bit3 of I/O port 3			
V_{DD}	I	Positive power supply			
OSC	I	Oscillation component connection pin			
TEST	I	For testing only			
GND	Ī	Negative power supply			
Vo	0	D/A current output			



■ ABSOLUTE MAXIMUM RATING


Items	Symbol	Min	Max	Unit.
Supply Voltage	V_{DD}	-0.3	6.0	V
Input Voltage	V _{IN}	V _{SS} -0.3	V _{DD} +0.3	V
Operating Temperature	T _{OP}	-20.0	70.0	°C
Storage Temperature	T _{STG}	-55.0	125.0	°C

■ ELECTRICAL CHARACTERISTICS

Item	Sym.	Min.	Тур.	Max.	Unit	Condition
Operating Voltage	V_{DD}	2.4	3.0	5.1	V	
Standby Current	I _{SBY}	ı	-	2.0	иA	V _{DD} =3V, no load
Operating Current	I _{OPR}	ı	-	250	иA	V _{DD} =3V, no load
Input Current of P1	li	1	3	-	uA	V _{DD} =3V
Drive Current of P2,P3	I _{OD}	1.5	2	-	mΑ	$V_{DD} = 3V, V_{O} = 2.4V$
Sink Current of P2,P3	Ios	2.0	3	-	mΑ	$V_{DD} = 3V, V_{O} = 0.4V$
D/A Output Current	I _{vo}	2.0	3.0	4.0	mA	$V_{DD} = 3V, V_{O} = 0.7V$
Oscillation Freq.	Fosc	ı	1.0	-	MHz	V _{DD} =3V



■ BONDING PAD

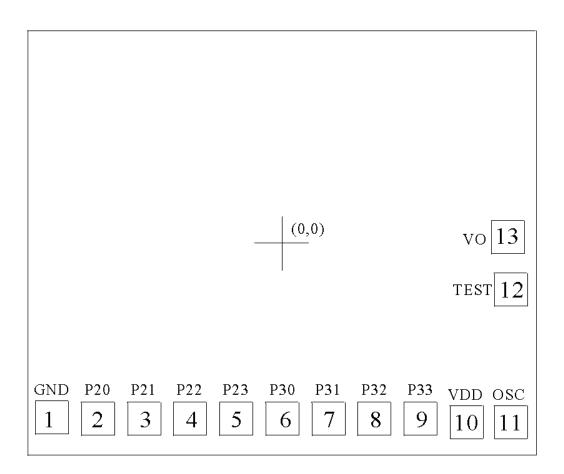

SN67010

Note: The substrate MUST be connected to Vss in PCB layout.



DISCLAIMER

The information appearing in SONiX web pages ("this publication") is believed to be accurate.

However, this publication could contain technical inaccuracies or typographical errors.

The reader should not assume that this publication is error-free or that it will be suitable for any particular purpose. SONiX makes no warranty, express, statutory implied or by description in this publication or other documents which are referenced by or linked to this publication. In no event shall SONiX be liable for any special, incidental, indirect or consequential damages of any kind, or any damages whatsoever, including, without limitation, those resulting from loss of use, data or profits, whether or not advised of the possibility of damage, and on any theory of liability, arising out of or in connection with the use or performance of this publication or other documents which are referenced by or linked to this publication. This publication was developed for products offered in Taiwan. SONiX may not offer the products discussed in this document in other countries. Information is subject to change without notice. Please contact SONiX or its local representative for information on offerings available. Integrated circuits sold by SONiX are covered by the warranty and patent indemnification provisions stipulated in the terms of sale only.

The application circuits illustrated in this document are for reference purposes only. SONIX DISCLAIMS ALL WARRANTIES, INCLUDING THE WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE. SONIX reserves the right to halt production or alter the specifications and prices, and discontinue marketing the Products listed at any time without notice. Accordingly, the reader is cautioned to verify that the data sheets and other information in this publication are current before placing orders.

Products described herein are intended for use in normal commercial applications. Applications involving unusual environmental or reliability requirements, e.g. military equipment or medical life support equipment, are specifically not recommended without additional processing by SONIX for such application.