



EL6247C - Product Brief 3-Ch Laser Diode Driver + Oscillator

output current is set by an analog voltage applied to an external resistor which converts the voltage into a current at the IIN pin (virtually

ground). The current seen at this pin is then amplified to become a cur-

Output current pulses are enabled when an 'L' signal is applied to the

OUTEN pin. No output current flows when OUTEN is 'H' and addi-

tional laser diode protection is provided since the OUTEN input will

float high when open. Complete IOUT shutoff is also achieved by hold-

ing the ENABLE pin low, which will override the OUTEN control pins.

An on-chip 500MHz oscillator is provided to allow output current mod-

ulation when in read mode. The oscillator is enabled when the OSCEN

pin is held high. If any of channels 2 or 3 are active, the oscillator is switched off. Complete control of amplitude and frequency is set by

two external resistors connected to ground at pins RFREO and RAMP

The external I_{IN} resistors allow the user to accurately and independently

set each amplifier transconductance by applying a voltage to each resistor, without restriction on the voltage range, thus ensuring broad voltage DAC compatibility. Alternatively, the IIN pin can be biased

VCC 16

VCC 15

IOUT 14

RAMF 12

ENABLE 11

OSCEN 10

VCC 9

GND 13

(see graphs in this data sheet for further explanation).

1 IINR

2 IIN2

3 GND

4 RFREQ

5 IIN3

8 OUTEN3

6 OUTENR

7 OUTEN2

from a current DAC or other current source.

General Description

rent source at pin IOUT.


Features

- "Shrink-Small" Outline Package
- Voltage output current source requiring one external set resistor per channel
- Auto Oscillator On-Off with **OUTEN Signals**
- Rise time = 0.8ns
- Fall time = 0.8ns
- On chip oscillator with frequency and amplitude control by use of external resistors to ground
- · Oscillator to 500MHz
- Oscillator to 100mA pk/pk
- Single +5V supply (±10%)
- Current amplification = 100
- Disable feature for power-up protection and power savings
- CMOS control signals

Applications

- · CD-RW applications
- Writable optical drives
- · Laser diode current switching

Ordering Information

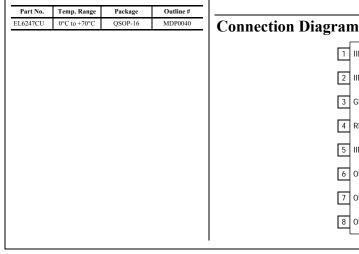

Note: All information contained in this data sheet has been carefully checked and is believed to be accurate as of the date of publication; however, this data sheet cannot be a "controlled document". Current revisions, if any, to these specifications are maintained at the factory and are available upon your request. We recommend checking the revision level before finalization of your design documentation.

© 2001 Elantec Semiconductor, Inc

October 25, 200

EL6247C - Product Brief

3-Ch Laser Diode Driver + Oscillator

General Disclaimer

Specifications contained in this data sheet are in effect as of the publication date shown. Elantec, Inc. reserves the right to make changes in the circuitry or specifications contained herein at any time without notice. Elantec, Inc. assumes no responsibility for the use of any circuits described herein and makes no representations that they are free from patent infringement.



IGH PERFORMANCE ANALOG INTEGRATED CIRCUITS

October 25, 2001

Elantec Semiconductor, Inc. 675 Trade Zone Blvd. Milpitas, CA 95035 Telephone: (408) 945-1323 (888) ELANTEC Fax: (408) 945-9305 European Office: +44-118-977-6020 Japan Technical Center: +81-45-682-5820

WARNING - Life Support Policy

Elantec, Inc. products are not authorized for and should not be used within Life Support Systems without the specific written consent of Elantec, Inc. Life Support systems are equipment intended to support or sustain life and whose failure to perform when properly used in accordance with instructions provided can be reasonably expected to result in significant personal injury or death. Users contemplating application of Elantec, Inc. Products in Life Support Systems are requested to contact Elantec, Inc. factory headquarters to establish suitable terms & conditions for these applications. Elantec, Inc.'s warranty is limited to replacement of defective components and does not cover injury to persons or property or other consequential damages.