General purpose transistor (dual transistors)

UMT1N / IMT1A

●Features

1) Two 2SA1037AK chips in a UMT or SMT package.
2) Mounting possible with UMT3 or SMT3 automatic mounting machines.
3) Transistor elements are independent, eliminating interference.

●Structure

Epitaxial planar type
PNP silicon transistor

The following characteristics apply to both Tr_1 and Tr_2.

●External dimensions (Units: mm)

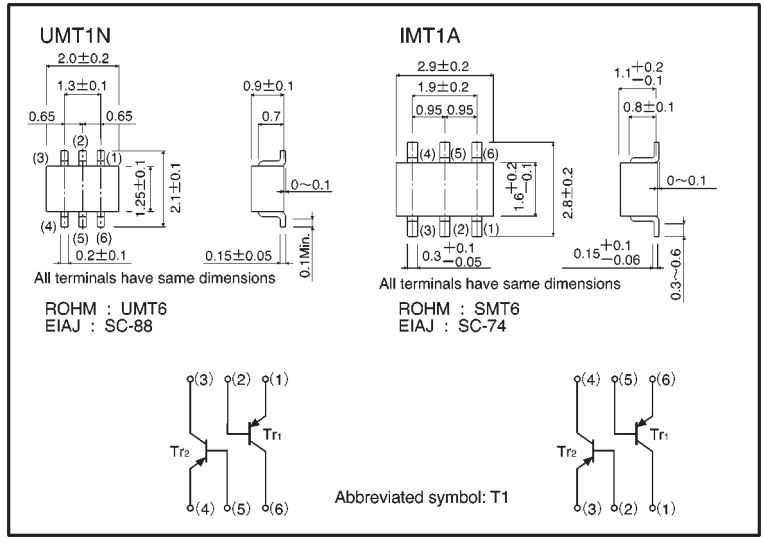

●Absolute maximum ratings (Ta = 25°C)

Parameter		Symbol	Limits	Unit	
Collector-base voltage		V_{CBO}	−60	V	
Collector-emitter voltage		V_{CEO}	−50	V	
Emitter-base voltage		V_{EBO}	−6	V	
Collector current		I_C	−150	mA	
Collector power dissipation	UMT1N	P_C	150 (TOTAL)	mW	∗1
	IMT1A		300 (TOTAL)		∗2
Junction temperature		Tj	150	℃	
Storage temperature		Tstg	−55~+150	℃	

∗1 120mW per element must not be exceeded.
∗2 200mW per element must not be exceeded.

(96-494-A22)

●Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV_{CBO}	−60	—	—	V	I_C=−50 μA
Collector-emitter breakdown voltage	BV_{CEO}	−50	—	—	V	I_C=−1mA
Emitter-base breakdown voltage	BV_{EBO}	−6	—	—	V	I_E=−50 μA
Collector cutoff current	I_{CBO}	—	—	−0.1	μA	V_{CB}=−60V
Emitter cutoff current	I_{EBO}	—	—	−0.1	μA	V_{EB}=−7V
Collector-emitter saturation voltage	$V_{CE(sat)}$	—	—	−0.5	V	I_C/I_B=−50mA/−5mA
DC current transfer ratio	h_{FE}	120	—	560	—	V_{CE}=−6V, I_C=−1mA
Transition frequency	f_T	—	140	—	MHz	V_{CE}=−12V, I_E=2mA, f=100MHz
Output capacitance	Cob	—	4	5	pF	V_{CB}=−12V, I_E=0A, f=1MHz

●Packaging specifications

	Packaging type	Taping	
	Code	TR	T108
Part No.	Basic ordering unit (pieces)	3000	3000
UMT1N		○	—
IMT1A		—	○

●Electrical characteristic curves

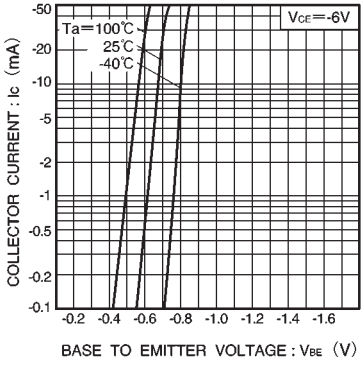

Fig.1 Grounded emitter propagation characteristics

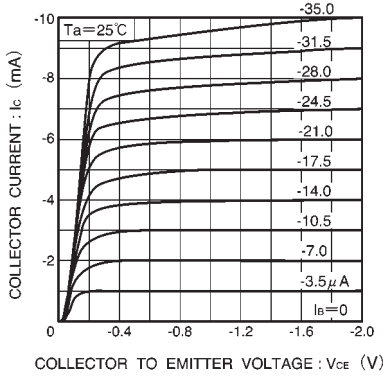

Fig.2 Grounded emitter output characteristics (Ⅰ)

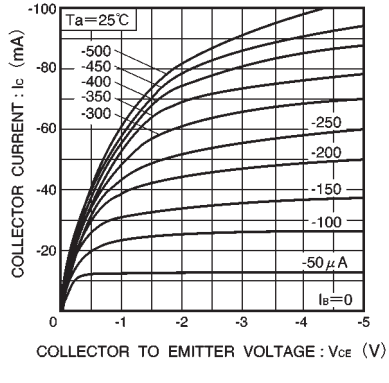

Fig.3 Grounded emitter output characteristics (Ⅱ)

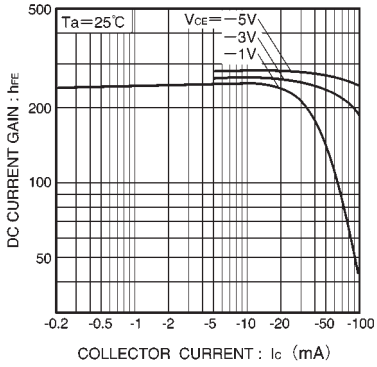

Fig.4 DC current gain vs. collector current (Ⅰ)

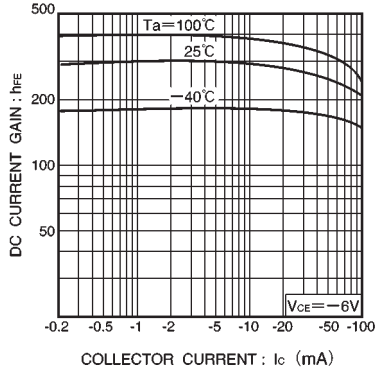

Fig.5 DC current gain vs. collector current (Ⅱ)

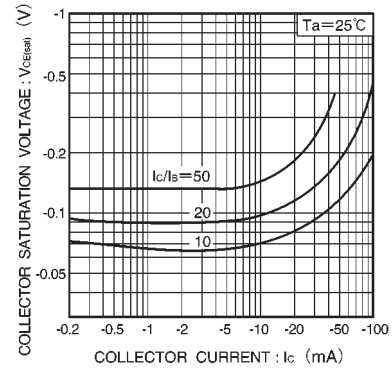

Fig.6 Collector-emitter saturation voltage vs. collector current (Ⅰ)

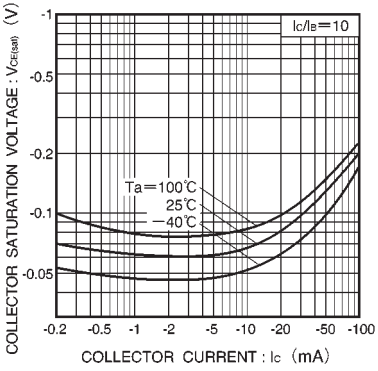

Fig.7 Collector-emitter saturation voltage vs. collector current (Ⅱ)

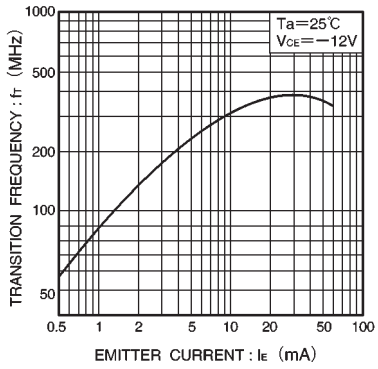

Fig.8 Gain bandwidth product vs. emitter current

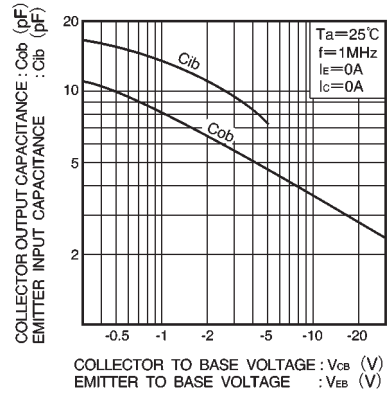

Fig.9 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage