



Power Bridge Rectifiers

SKB B../.-4

Features

- Square plastic case with screw terminals

Typical Applications


- Internal power supplies for electronic equipment
- Electronic control equipment
- DC motors
- Field rectifiers for DC motors
- Battery charger rectifiers
- Recommended snubber network:
RC: 10 nF, 20...50 Ω ($P_R = 1 W$)





1) Freely suspended or mounted on an insulator


2) Mounted on a painted metal sheet of min. 250 x 250 x 1 mm

V_{RSM}, V_{RRM} V	V_{VRMS} V	$I_D = 5 A (T_a = 45 ^\circ C)$ Types	C_{max} μF	R_{min} Ω
400	125	SKB B80/70-4		0,5
800	250	SKB B250/220-4		1
1200	380	SKB B500/445-4		2

Symbol	Conditions	Values	Units
I_D	$T_a = 45 ^\circ C$, isolated ¹⁾	5	A
	$T_a = 45 ^\circ C$, chassis ²⁾	5	A
I_{DCL}	$T_a = 45 ^\circ C$, isolated ¹⁾	4	A
	$T_a = 45 ^\circ C$, chassis ²⁾	4	A
	$T_a = ^\circ C$,		A
I_{FSM}	$T_{vj} = 25 ^\circ C$, 10 ms	180	A
	$T_{vj} = 150 ^\circ C$, 10 ms	150	A
i^2t	$T_{vj} = 25 ^\circ C$, 8,3 ... 10 ms	160	A ² s
	$T_{vj} = 150 ^\circ C$, 8,3 ... 10 ms	110	A ² s
V_F	$T_{vj} = 25 ^\circ C$, $I_F = 80 A$	max. 2,65	V
$V_{(TO)}$	$T_{vj} = 150 ^\circ C$	max. 0,8	V
r_T	$T_{vj} = 150 ^\circ C$	max. 24	mΩ
I_{RD}	$T_{vj} = 25 ^\circ C$, $V_{RD} = V_{RRM}$	100	μA
	$T_{vj} = ^\circ C$, $V_{RD} = V_{RRM} \geq V$		μA
I_{RD}	$T_{vj} = 150 ^\circ C$, $V_{RD} = V_{RRM}$	0,6	mA
	$T_{vj} = ^\circ C$, $V_{RD} = V_{RRM} \geq V$		mA
t_{rr}	$T_{vj} = 25 ^\circ C$	10	μs
f_G		2000	Hz
$R_{th(j-a)}$	isolated ¹⁾	13	K/W K/W
T_{vj}		- 40 ... + 150	$^\circ C$
T_{stg}		- 55 ... + 150	$^\circ C$
V_{isol}			V~
M_s	to heatsink	1,5 ± 15 %	Nm
M_t	to terminals	1 ± 15 %	Nm
a			m/s ²
w		60	g
F_u		6	A
Case		G 8	

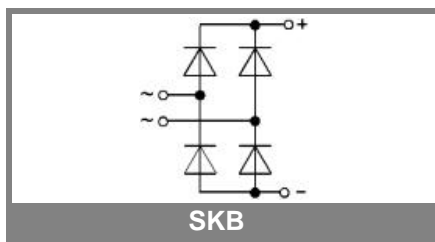

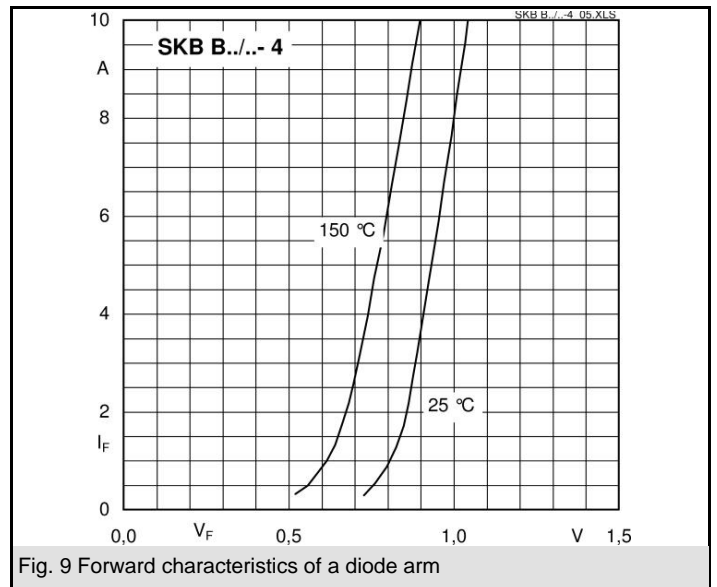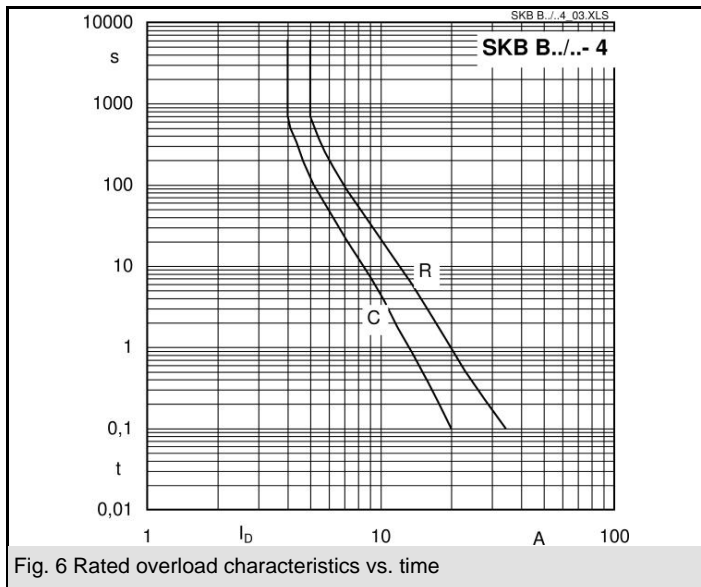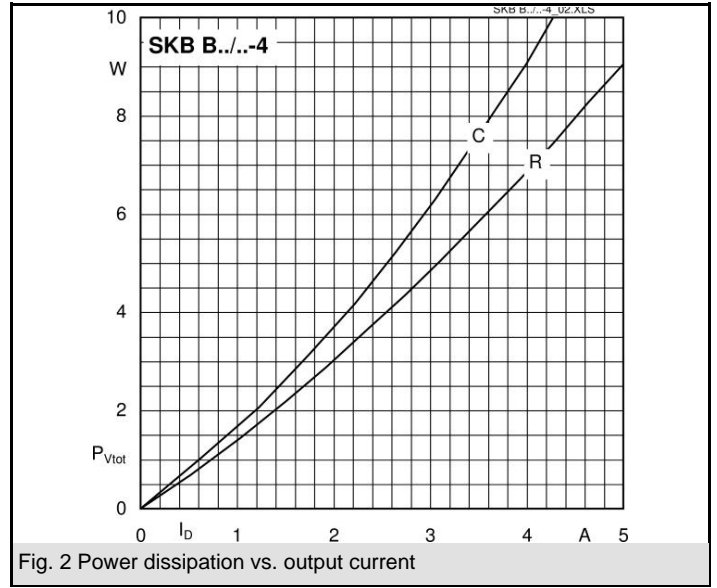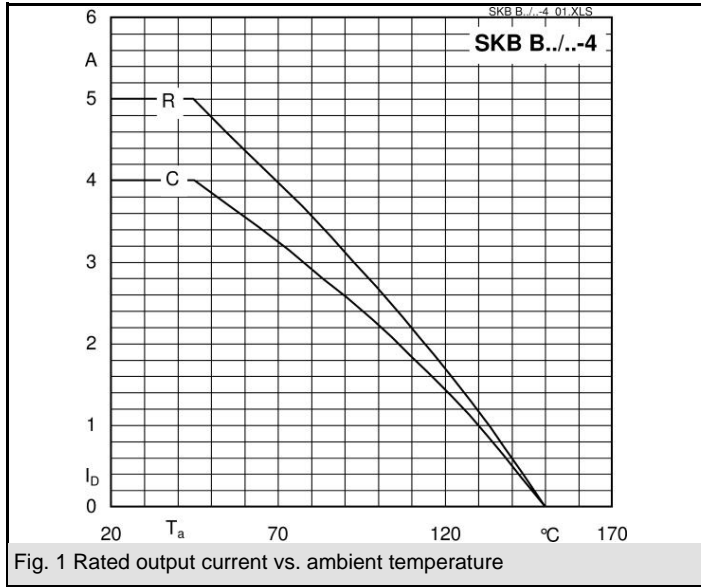

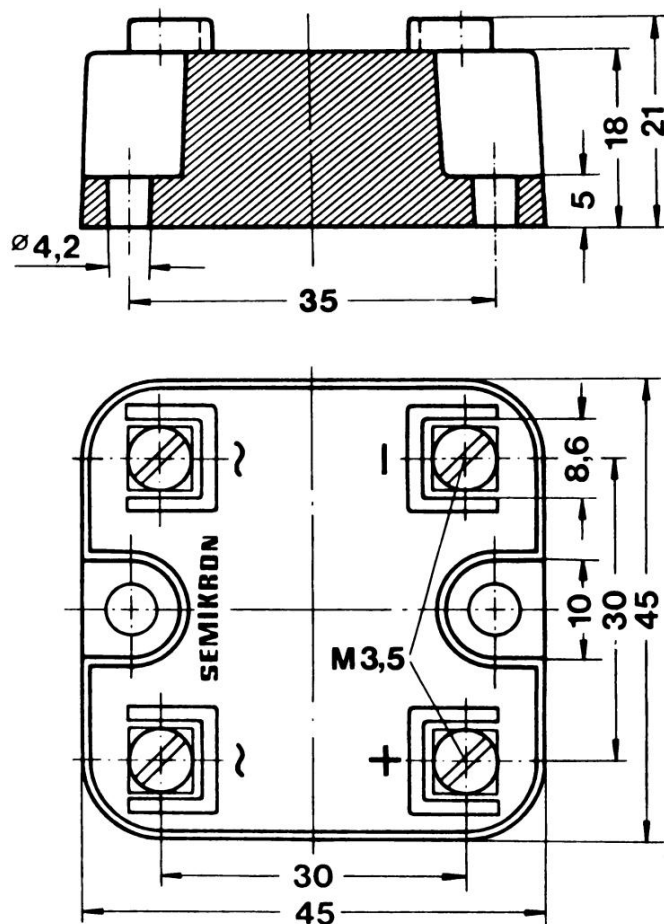

Case G 8

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.