

## **FM IF Amplifier-Limiter, Detector, and Audio Preamplifier**

**For FM IF Amplifier Applications Up To 20 MHz In  
Communications Receivers And High-Fidelity Receivers**

**Features:**

- Good sensitivity: Input limiting voltage (knee) =  $250 \mu\text{V}$  typ. at 10.7 MHz
- Excellent AM rejection: 55 dB typ. at 10.7 MHz
- Internal Zener diode regulation for the IF amplifier section
- Low harmonic distortion
- Differential peak detection: Permits simplified single-coil tuning
- Audio preamplifier voltage gain: 21 dB typ.
- Minimum number of external parts required

RCA CA3075 is an integrated circuit which provides, in a single monolithic chip, an FM IF subsystem for Communications and High-Fidelity Receivers. This device, shown in the schematic diagram (Fig. 2), consists of a multistage IF amplifier-limiter section with a Zener regulated power supply, an FM detector stage, and an AF preamplifier section. A typical application of the CA3075, in FM receiver circuits, is shown in the block diagram (Fig. 1).


The three-stage, emitter-follower-coupled IF amplifier section provides a 60-dB typ. voltage gain at an operating frequency of 10.7 MHz and features, because of its

transistor constant-current sink, an output stage with exceptionally good limiting characteristics.

The FM detector section, which utilizes a differential-peak-detection circuit, requires only a single coil in the associated outboard detector circuit; hence, tuning the detector circuit is a simple procedure.

The audio preamplifier circuit provides a 21-dB voltage gain with low impedance output for driving subsequent audio amplifier stages.

The CA3075 utilizes a 14-lead dual-in-line plastic package with leads in a special quad-formed arrangement.

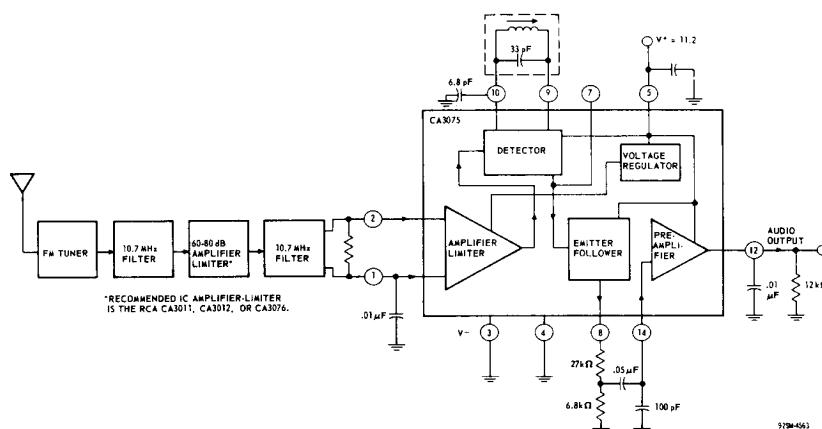

*Fig. 1 - Block diagram of typical FM receiver utilizing the CA3075*

**CA3075****MAXIMUM RATINGS, Absolute-Maximum Values at  $T_A = 25^\circ\text{C}$** 

DC Supply Voltage [ between Terminals 5 ( $V^+$ ) and 3 ( $V^-$ ) ]	12.5	V
DC Current (into Terminal 5) .....	30	mA
Device Dissipation:		
Up to $T_A = 50^\circ\text{C}$ .....	760	mW
Above $T_A = 50^\circ\text{C}$ .....	derate linearly	7.6 mW/ $^\circ\text{C}$
Ambient Temperature Range:		
Operating .....	- 40 to + 85	$^\circ\text{C}$
Storage .....	- 65 to + 150	$^\circ\text{C}$
Lead Temperature (During soldering for 10 s max.) .....	+ 260	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS at  $T_A = 25^\circ\text{C}$** 

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	LIMITS			UNITS	TEST CIRCUIT FIG. NO.
			MIN.	TYP.	MAX.		
<b>Static Characteristics</b>							
DC Voltage:							
At Terminal 7	$V_7$			6.1	—	V	6
At Terminal 8	$V_8$	$V^+ = 11.2\text{ V}$	—	5.4	—	V	
At Terminal 12	$V_{12}$		—	5.2	—	V	
DC Current (into Terminal 5):							
At $V^+ = 8.5\text{ V}$			8.5	15	—	mA	6
At $V^+ = 11.2\text{ V}$	$I_5$	—	—	17.5	—	mA	
At $V^+ = 12.5\text{ V}$			—	19	29	mA	
<b>Dynamic Characteristics at <math>V^+ = 11.2</math></b>							
<u>IF AMPLIFIER</u>							
Input Limiting Voltage (knee, -3 dB point)	$V_I(\text{lim})$	$f_0 = 10.7\text{ MHz}$ $f(\text{Modulation}) = 400\text{ Hz}$ Deviation = $\pm 75\text{ kHz}$	—	250	600	$\mu\text{V}$	3
AM Rejection	AMR	$f_0 = 10.7\text{ MHz}$ $f(\text{Modulation}) = 400\text{ Hz}$ FM: Deviation = $\pm 75\text{ kHz}$ AM: Modulation = 30%	—	55	—	dB	5
Input Impedance Components:							
Parallel Resistance	$R_I$	$f_0 = 10.7\text{ MHz}$	—	4.5	—	$\text{k}\Omega$	—
Parallel Capacitance	$C_I$	$V_{IN} = 10\text{ mV RMS}$	—	4.5	—	pF	—
<u>DETECTOR</u>							
Recovered AF Voltage (at Terminal 12)	$V_O(\text{AF})$	$f_0 = 10.7\text{ MHz}$ $f(\text{Modulation}) = 400\text{ Hz}$ Deviation = $\pm 75\text{ kHz}$	—	1.5	—	V	3
Total Harmonic Distortion	THD	—	—	1	2	%	
<u>AUDIO PREAMPLIFIER</u>							
Voltage Gain	$A(\text{AF})$	$V_{IN} = 100\text{ mV}, f_0 = 400\text{ Hz}$	—	21	—	dB	4
Total Harmonic Distortion	THD	$V_{OUT} = 2\text{ V}, f_0 = 400\text{ Hz}$	—	1.5	5	%	4

## Radio/Communication Circuits

### CA3075

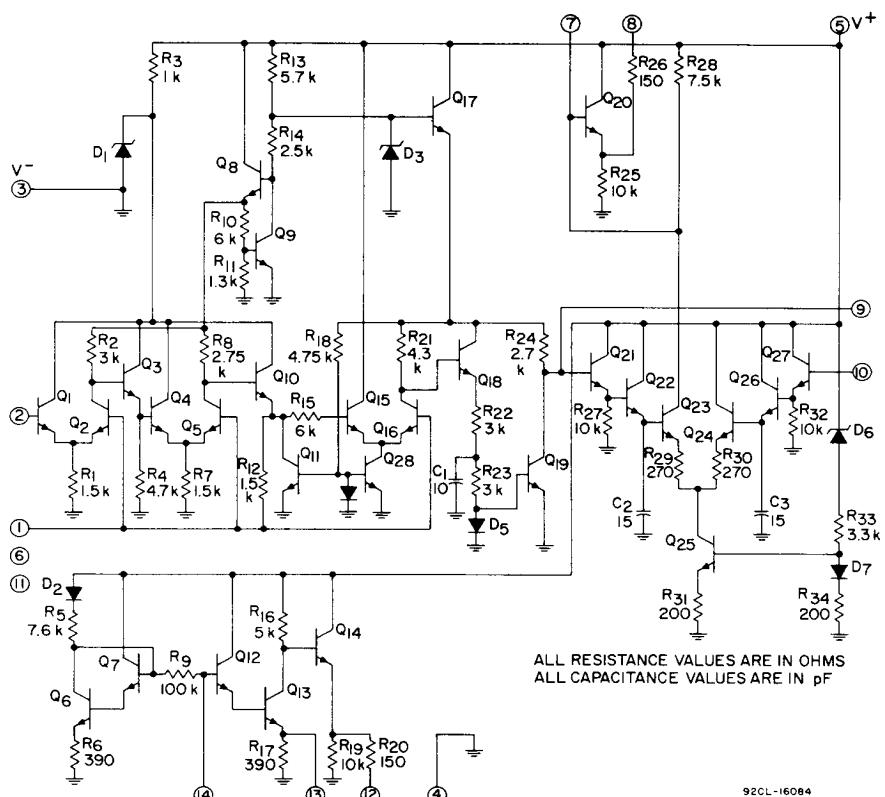


Fig. 2 - Schematic diagram of CA3075

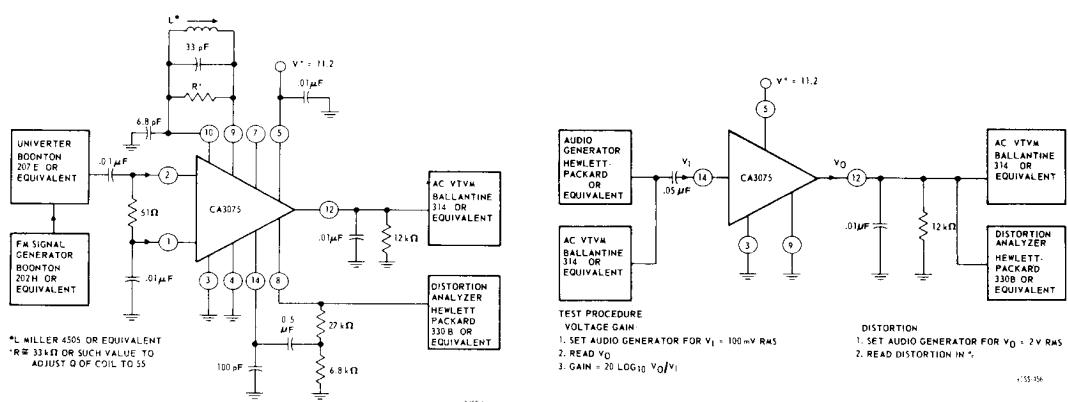


Fig. 3 - Test circuit for input limiting voltage, recovered AF voltage, and total harmonic distortion

Fig. 4 - Test circuit for audio preamplifier voltage gain and total harmonic distortion

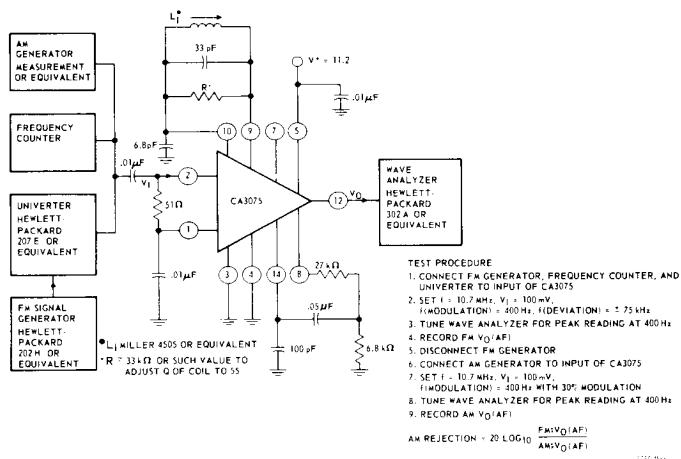
**CA3075**

Fig. 5 - Test circuit for AM rejection

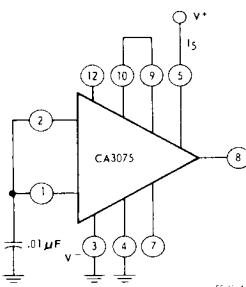
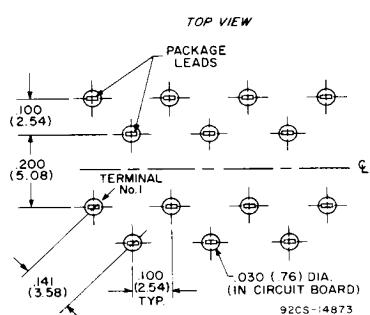


Fig. 6 - Test circuit for static characteristics

Recommended Mounting-Hole Dimensions and Spacings.



Dimensions in parentheses are in millimeters and are derived from the basic inch dimensions as indicated.