


# New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.  
SPRINGFIELD, NEW JERSEY 07081  
U.S.A.

TELEPHONE: (973) 376-2922  
(212) 227-6005  
FAX: (973) 376-8960

## 2N398, 2N398 A (GERMANIUM)

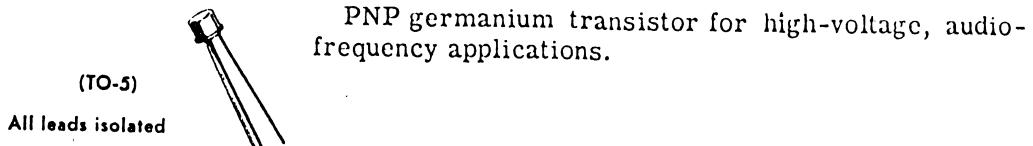


PNP germanium transistor for high-voltage, audio-frequency applications.

### MAXIMUM RATINGS

Rating	Symbol	2N398A	2N398	Unit
Collector-Base Voltage	$V_{CB}$	105	105	Vdc
Collector-Emitter Voltage	$V_{CEO}$	105	105	Vdc
Emitter-Base Voltage	$V_{EB}$	50	50	Vdc
DC Collector Current	$I_C$	200	100	mA
Emitter Current	$I_E$	200	100	mA
Junction Temperature	$T_J$	-65 to +100	-65 to +85	°C
Storage Temperature	$T_{stg}$	-65 to +100	-65 to +85	°C
Collector Dissipation @ 25°C	$P_D$	150	50	mW
Thermal Resistance, Junction to Ambient	$\theta_{JA}$ max	0.5	1.2	°C/mW

### ELECTRICAL CHARACTERISTICS ( $T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristics	Symbol	Min	Typical	Max	Unit
Collector-Base Cutoff Current ( $V_{CB} = 105 \text{ V}$ , $I_B = 0$ )	$I_{CBO}$	-	12.0	50	$\mu\text{A}$
Collector-Base Cutoff Current ( $V_{CB} = 2.5 \text{ V}$ , $I_B = 0$ )	$I_{CBO}$	-	5.0	14	$\mu\text{A}$
Emitter-Base Cutoff Current ( $V_{EB} = 50 \text{ V}$ , $I_C = 0$ )	$I_{EBO}$	-	3.0	50	$\mu\text{A}$
Collector-Emitter Saturation Voltage ( $I_C = 5 \text{ mA dc}$ ; $I_B = 0.25 \text{ mA dc}$ )	$V_{CE (\text{SAT})}$	-	0.11	0.35	Vdc
Base-Emitter Saturation Voltage ( $I_C = 5 \text{ mA dc}$ ; $I_B = 0.25 \text{ mA dc}$ )	$V_{BE (\text{SAT})}$	-	0.22	0.40	Vdc
DC Current Transfer Ratio ( $I_C = 5 \text{ mA dc}$ ; $V_{CE} = 0.35 \text{ Vdc}$ )	$h_{FE}$	20	65	-	-
DC Collector-Emitter Punch-Through Voltage ( $V_{CB}$ necessary to obtain $V_{EB}$ of -1 V max, using instrument with $Z_{in} > 11 \text{ megohm}$ to measure $V_{BE}$ )	$V_{PT}$	105	160	-	Vdc
Small-Signal Short-Circuit, Forward Current Transfer Ratio Cutoff Frequency ( $V_{CB} = 6 \text{ Vdc}$ ; $I_E = 1 \text{ mA dc}$ )	$f_{ab}$	-	1.0	-	MHz



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.