



TELEFUNKEN electronic

Creative Technologies

T-31-15


BFS 62

Silicon NPN Epitaxial Planar RF Transistor

Applications: General up to the VHF range

Features:

- Small feedback capacitance
- Noise figure < 4 dB

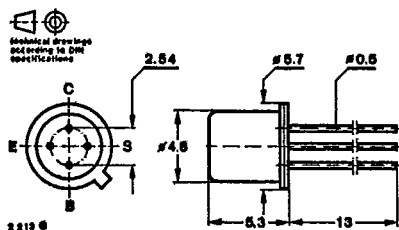Dimensions in mm

Terminal "S"
connected with case
Case
18 A 4 DIN 41876
JEDEC TO 72
Weight max. 0.5 g

Absolute maximum ratings

Collector-base voltage	V_{CBO}	40	V
Collector-emitter voltage	V_{CEO}	25	V
Emitter-base voltage	V_{EBO}	4	V
Collector current	I_C	25	mA
Base current	I_B	2	mA
Total power dissipation			
$T_{amb} \leq 45^\circ\text{C}$	P_{tot}	200	mW
$T_{case} \leq 45^\circ\text{C}, R_{thJC} \leq 500 \text{ K/W}$	P_{tot}	260	mW
Junction temperature	T_j	175	$^\circ\text{C}$
Storage temperature range	T_{stg}	-65 ... +175	$^\circ\text{C}$

Thermal resistances

	Min.	Typ.	Max.
Junction ambient			650 K/W
Junction case with cooling fin			500 K/W

T1.2/572.0484 E1

3607

F-04

7-31-15

BFS 62

DC characteristics

Min. Typ. Max.

 $T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Collector cut-off current

 $V_{CB} = 20\text{ V}$ $I_{CBO}^{*)}$

100 nA

 $V_{CB} = 20\text{ V}$, $T_{amb} = 150\text{ }^{\circ}\text{C}$ $I_{CBO}^{**)}$ 20 μA

Collector-base breakdown voltage

 $I_C = 10\text{ }\mu\text{A}$ $V_{(BR)CBO}^{*)}$

40

V

Collector-emitter breakdown voltage

 $I_C = 2\text{ mA}$ $V_{(BR)CEO}^{*)1)}$

25

V

Emitter-base breakdown voltage

 $I_E = 10\text{ }\mu\text{A}$ $V_{(BR)EBO}^{*)}$

4

V

Base-emitter voltage

 $V_{CE} = 10\text{ V}$, $I_C = 7\text{ mA}$ $V_{BE}^{1)}$

800 mV

DC forward current transfer ratio

 $V_{CE} = 10\text{ V}$, $I_C = 7\text{ mA}$ $h_{FE}^{*)1)}$

35

90

 $V_{CE} = 2\text{ V}$, $I_C = 20\text{ mA}$ $h_{FE}^{1)}$

15

AC characteristics

 $T_{amb} = 25\text{ }^{\circ}\text{C}$

Gain bandwidth product

 $V_{CB} = 10\text{ V}$, $I_C = 5\text{ mA}$, $f = 100\text{ MHz}$ f_T

580

MHz

Feedback capacitance

 $V_{CB} = 10\text{ V}$, $I_C = 1\text{ mA}$, $f = 100\text{ MHz}$ C_{ore}

0.33 pF

Noise figure

 $V_{CB} = 10\text{ V}$, $I_C = 2\text{ mA}$, $f = 200\text{ MHz}$ F

4 dB

Two port characteristics

 $T_{amb} = 25\text{ }^{\circ}\text{C}$

Common base configuration

 $V_{CB} = 10\text{ V}$, $I_C = 5\text{ mA}$, $f = 200\text{ MHz}$

Short circuit forward transfer admittance

 $|y_{fe}|$

74

mS

Collector current for: $|y_{fe}|_{max.}$ I_C

6.4

mA

*) AQL = 0.65%, **) AQL = 2.5%, ¹⁾ $\frac{t_p}{T} = 0.01$, $t_p = 0.3\text{ ms}$

7. Taping and Reeling

T-91-20


7.1. Taping of TO-92 Transistors

Standard reeling: Taped on reel, reeled together with a paper film.

7.1.1. Order Numbers

Add the taping-code to the order number.

Example:

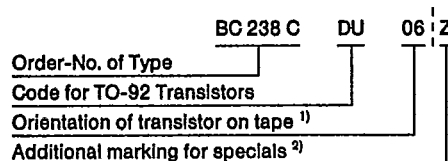

¹⁾ 06 = View on flat side of transistor, view on gummed tape

05 = View on round side of transistor, view on gummed tape

²⁾ Additional marking "0": taping without paper film

Additional marking "Z": Zigzag folded tape in special box. Marking for orientation of transistor not necessary, because box can be opened on top or bottom

Example for order No.: BC 237 C DU Z

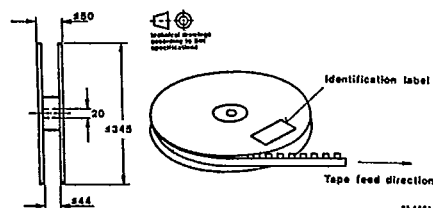


Fig. 7.1. Dimensions of reel in mm

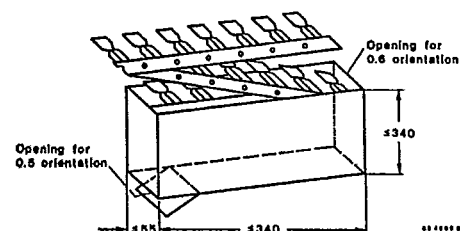


Fig. 7.2. Dimension of box for Zigzag folding in mm

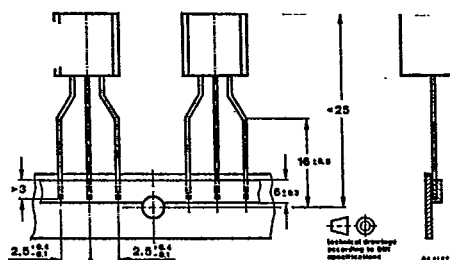


Fig. 7.3 Dimensions of tape in mm

7.1.2 Quantity of devices

1 000 devices per reel

2 000 devices per folded tape in special box.

7.2. Taped transistors in SOT 23 and SOT 143 case

7.2.1. Designation

a) Standard taping

Designation is attached with code GS 08 in case of standard taping. Example for normal version transistors as standard taped: BF 569-GS 08.

Example for R-version transistors as standard taped: BF 569 R-GS 08.

In case of standard taping, the transistor orientation on the tape is shown in Fig. 7.4 and Fig. 7.5.

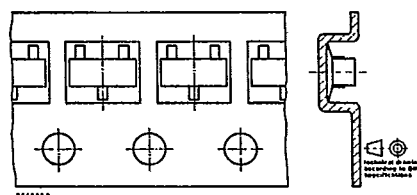


Fig. 7.4 Standard taped SOT 23

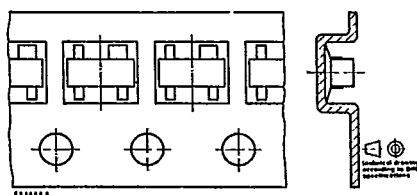


Fig. 7.5. Standard taped SOT 143

b) Reverse taping

Designation is attached with code GS 07 in case of reverse taping. Example for normal version transistors as reverse taped: BF 569-GS 07.

Example for R-version transistors as reverse taping: BF 569 R-GS 07.

In case of reverse taping, the transistor orientation on the tape is shown in Fig. 7.6.

Regarding MOS-FET and MES-FET devices, reverse taping is at present not available.

T-91-20

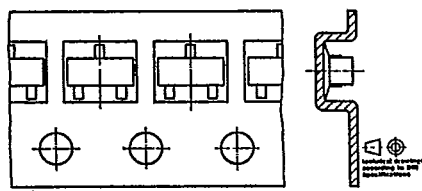


Fig. 7.6 Reverse taped SOT 23

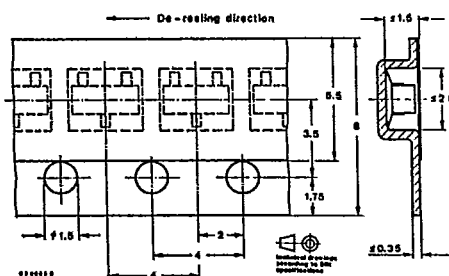


Fig. 7.7 Dimensions of tape in mm




Fig. 7.8 Dimensions of reel in mm

7.2.2 Quantity of devices

3000 devices per reel