


# Schottky MiniMod

## FST8130 - FST8145

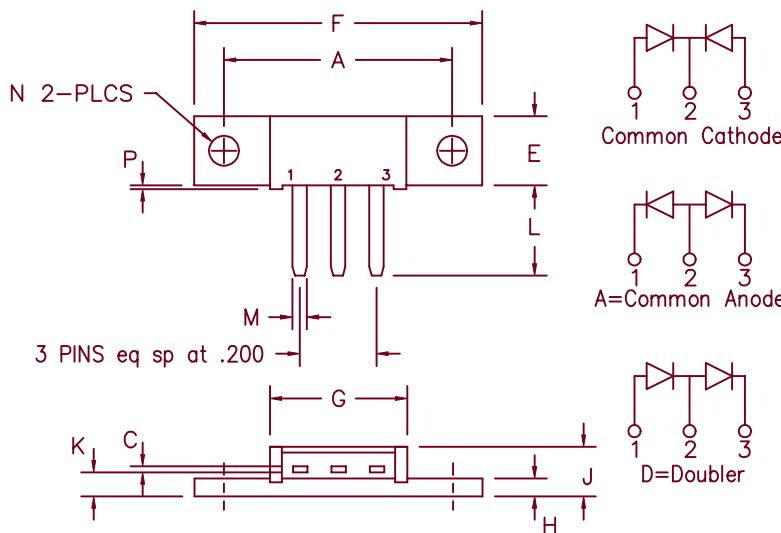

Note: Baseplate Common with Pin 2

	Dim. Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	1.180	1.195	29.97	30.35	
C	.027	.037	0.69	0.94	
E	.350	.370	8.89	9.40	
F	1.490	1.510	37.85	38.35	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	.115	.135	2.92	3.43	
L	.460	.480	11.68	12.19	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	
P	.015	.025	0.38	0.64	Dia.

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST8130*		30V	30V
FST8135*	80CNQ035	35V	35V
	84CNQ035		
FST8140*	80CNQ040	40V	40V
	84CNQ040		
FST8145*	80CNQ045	45V	45V
	84CNQ045		

\*Add the Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- Common Cathode Center Tap
- 2X40 Amperes avg.
- 150°C Junction Temperature
- Reverse Energy Tested
- Low Forward Voltage

### Electrical Characteristics

Average forward current per pkg  
 Average forward current per leg  
 Maximum surge current per leg  
 Max repetitive peak reverse current per leg  
 Max peak forward voltage per leg  
 Max peak forward voltage per leg  
 Max peak reverse current per leg  
 Max peak reverse current per leg  
 Typical junction capacitance per leg

I<sub>F(AV)</sub> 80 Amps  
 I<sub>F(AV)</sub> 40 Amps  
 I<sub>FSM</sub> 800 Amps  
 I<sub>R(OV)</sub> 2 Amps  
 V<sub>FM</sub> 0.47 Volts  
 V<sub>FM</sub> 0.53 Volts  
 I<sub>RM</sub> 500 mA  
 I<sub>RM</sub> 3.0 mA  
 C<sub>J</sub> 2100 pF

T<sub>C</sub> = 110°C, Square wave, R<sub>θJC</sub> = 0.5°C/W  
 T<sub>C</sub> = 110°C, Square wave, R<sub>θJC</sub> = 1.0°C/W  
 8.3 ms, half sine, T<sub>J</sub> = 150°C  
 f = 1 KHZ, 25°C, 1 usec square wave  
 I<sub>FM</sub> = 40A: T<sub>J</sub> = 150°C\*  
 I<sub>FM</sub> = 40A: T<sub>J</sub> = 25°C\*  
 V<sub>RRM</sub>, T<sub>J</sub> = 125°C\*  
 V<sub>RRM</sub>, T<sub>J</sub> = 25°C  
 V<sub>R</sub> = 5.0V, T<sub>C</sub> = 25°C

\*Pulse test: Pulse width 300 usec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-55°C to 175°C
Operating junction temp range	T <sub>J</sub>	-55°C to 150°C
Max thermal resistance per leg	R <sub>θJC</sub>	1.0°C/W Junction to case
Max thermal resistance per pkg	R <sub>θJC</sub>	0.5°C/W Junction to case
Typical thermal resistance (greased)	R <sub>θCS</sub>	0.3°C/W Case to sink
Mounting Base Torque		10 inch pounds maximum
Weight		0.3 ounce (8.4 grams) typical

# FST8130 – FST8145

Figure 1  
Typical Forward Characteristics – Per Leg

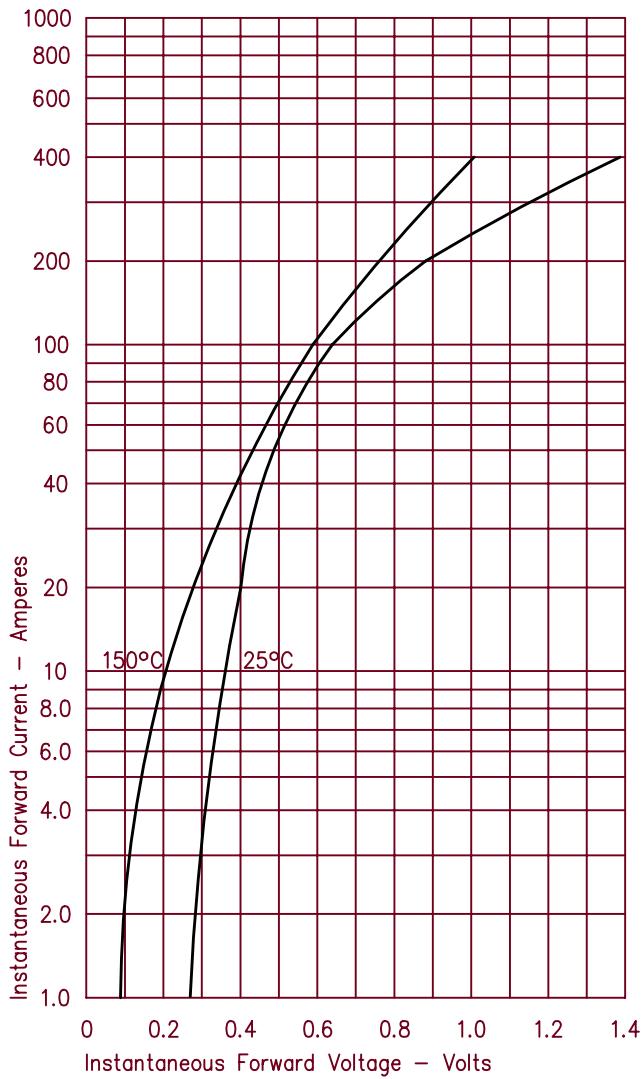


Figure 2  
Typical Reverse Characteristics – Per Leg

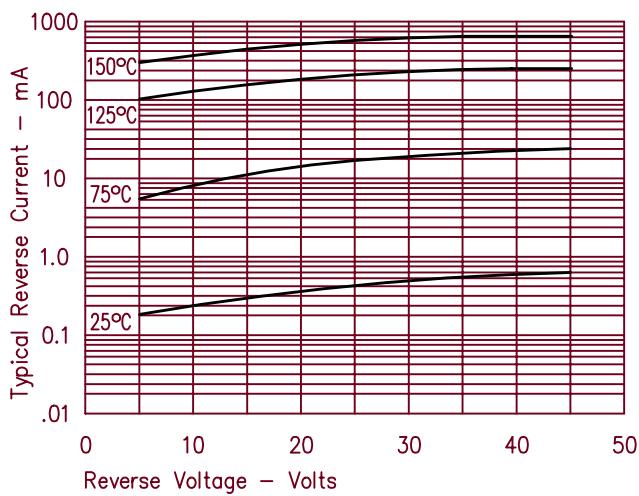


Figure 3  
Typical Junction Capacitance – Per Leg

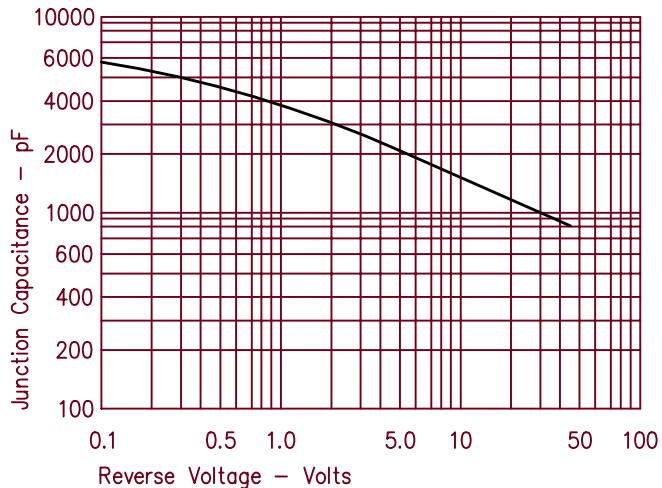


Figure 4  
Forward Current Derating – Per Leg


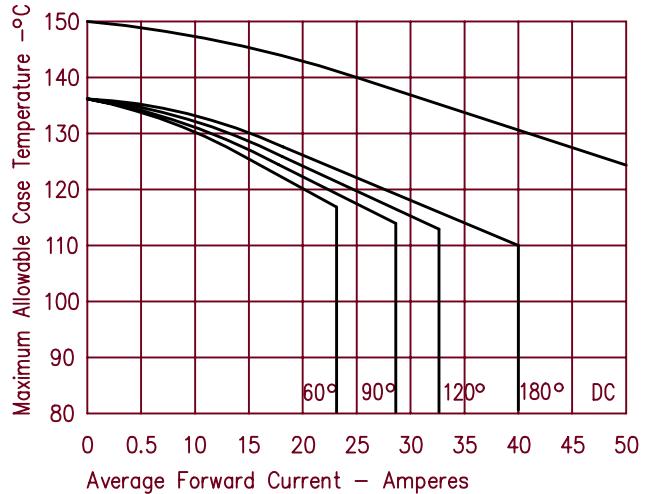


Figure 5  
Maximum Forward Power Dissipation – Per Leg

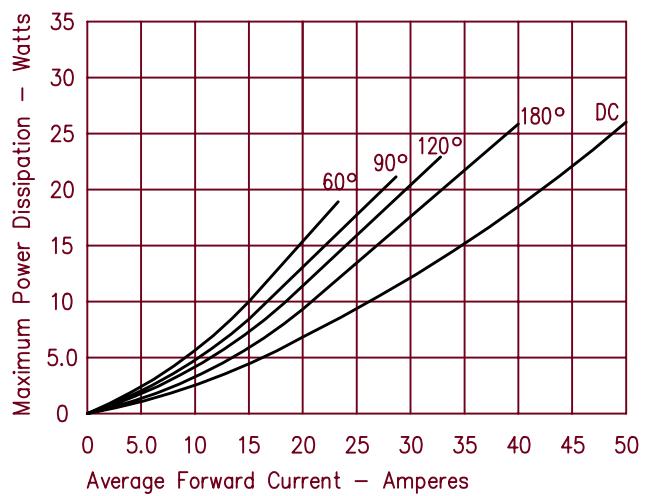

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.