

# MIP705

## Silicon MOS IC

### ■ Features

- 3-pin intelligent power device
- Five protective functions (over-current, over-voltage, short circuit load, over heat, ESD) are integrated
- Acceptable both AC and DC power supply

### ■ Applications

- For automotive electric equipment

### ■ Absolute Maximum Ratings ( $T_a = 25 \pm 3^\circ\text{C}$ )



| Parameter                     | Symbol    | Ratings                           | Unit             |
|-------------------------------|-----------|-----------------------------------|------------------|
| Drain to Source voltage       | $V_{DS}$  | 60                                | V                |
| Output peak current           | $I_{OP}$  | $\pm 5$                           | A                |
| Output current                | $I_O$     | -1 to $2^{\ast 1}$                | A                |
| Input voltage                 | $V_{IN}$  | -0.5 to 6                         | V                |
| Input current                 | $I_{IN}$  | $\pm 10$                          | mA               |
| Drain clamp energy            | EAS       | 55 <sup><math>\ast 2</math></sup> | mJ               |
| Allowable power dissipation   | $P_D$     | 1<br>$10^{\ast 3}$                | W                |
| Operating ambient temperature | $T_{opr}$ | -40 to +85                        | $^\circ\text{C}$ |
| Channel temperature           | $T_{ch}$  | 150                               | $^\circ\text{C}$ |
| Storage temperature           | $T_{stg}$ | -55 to +150                       | $^\circ\text{C}$ |

<sup>$\ast 1$</sup>  Maximum load current, not the average current.

<sup>$\ast 2$</sup>   $L = 10\text{mH}$ ,  $I_L = 3.32\text{A}$ ,  $V_{DD} = 30\text{V}$ , 1pulse,  $T_C = 25^\circ\text{C}$

<sup>$\ast 3$</sup>   $T_C = 25^\circ\text{C}$

### ■ Block Diagram

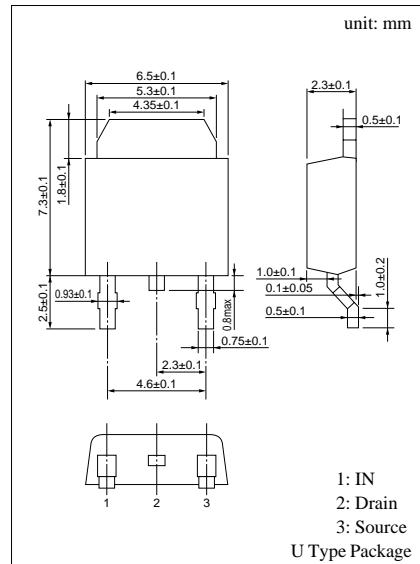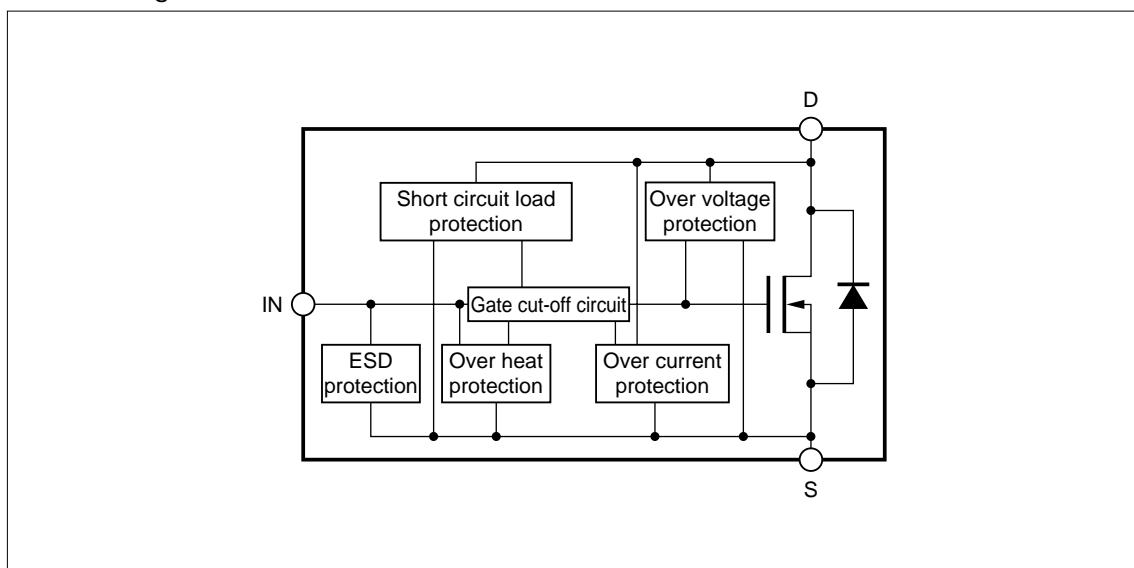

### ■ Electrical Characteristics ( $T_C = 25 \pm 2^\circ\text{C}$ )

| Parameter                           | Symbol         | Conditions                                    | min | typ  | max  | Unit          |
|-------------------------------------|----------------|---|-----|------|------|---------------|
| Drain to Source ON-resistance       | $R_{DS(on)}$   | $V_{IN} = 5\text{V}$ , $I_{DS} = 1.5\text{A}$ |     | 0.38 | 0.5  | $\Omega$      |
| Drain to Source ON-voltage          | $V_{DS(on)}$   | $V_{IN} = 5\text{V}$ , $I_{DS} = 1.5\text{A}$ |     | 0.57 | 0.75 | $\text{V}$    |
| Drain clamp voltage                 | $V_{DS(CL)}$   | $V_{IN} = 0$ , $I_{DS} = 3\text{mA}$          | 60  | 72   |      | $\text{V}$    |
| Drain OFF current (1)               | $I_{DS(off)1}$ | $V_{IN} = 0$ , $V_{DS} = 12\text{V}$          |     | 50   | 80   | $\mu\text{A}$ |
| Drain OFF current (2)               | $I_{DS(off)2}$ | $V_{IN} = 0$ , $V_{DS} = 16\text{V}$          |     | 65   | 140  | $\mu\text{A}$ |
| Input voltage (High)                | $V_{IN(H)}$    | $I_{DS} = 2\text{A}$                          | 4   |      |      | $\text{V}$    |
| Input voltage (Low)                 | $V_{IN(L)}$    | $I_{DS} = 0.1\text{mA}$                       |     |      | 0.8  | $\text{V}$    |
| Input current                       | $I_{IN(on)}$   | $V_{IN} = 5\text{V}$ , $V_{DS} = 0$           |     | 0.15 | 0.25 | $\text{mA}$   |
| Over current protection limit       | $I_{OCP}$      | $V_{IN} = 5\text{V}$                          | 3.8 | 5    | 7.5  | $\text{A}$    |
| Short circuit load protection limit | $V_{DS(SHT)}$  | $V_{IN} = 5\text{V}$                          | 3   |      |      | $\text{V}$    |

Note: The oscillation of the output current is caused when the drain voltage exceeds the short circuit load detection voltage under the ON state of output.

### ■ Operating condition

| Parameter                | Symbol   | min | typ | max | Unit       |
|--------------------------|----------|-----|-----|-----|------------|
| Operating supply voltage | $V_{DD}$ |     |     | 40  | $\text{V}$ |

### ■ Electrical Characteristics ( $T_C = 25 \pm 2^\circ\text{C}$ )

| Parameter                        | Symbol       | Conditions                                    | min | typ | max | Unit             |
|----------------------------------|--------------|---|-----|-----|-----|------------------|
| Over heat protection temperature | $T_{SHD}$    | $V_{IN} = 5\text{V}$                          | 170 | 205 | 240 | $^\circ\text{C}$ |
| Turn on delay time               | $t_{d(on)}$  |   |     | 3   |     | $\mu\text{s}$    |
| Rise time                        | $t_r$        | $V_{IN} = 5\text{V}$ , $I_{DS} = 1.5\text{A}$ |     | 18  |     | $\mu\text{s}$    |
| Turn off delay time              | $t_{d(off)}$ | $V_{DD} = 12\text{V}$ , $R_L = 8.2\Omega$     |     | 12  |     | $\mu\text{s}$    |
| Fall time                        | $t_f$        |   |     | 20  |     | $\mu\text{s}$    |

Note 1: The above values of characteristics are not guaranteed values and are only references for designing.

Note 2: If the chip temperature exceeds the "Over Heat Protection Temperature", output current is shut down.