




TRITON CONTROLS

DS-30A

ULTRASONIC SENSOR



RELIABLE ULTRASONIC TECHNOLOGY FOR DOOR AND GATE CONTROL

SPECIFICATION

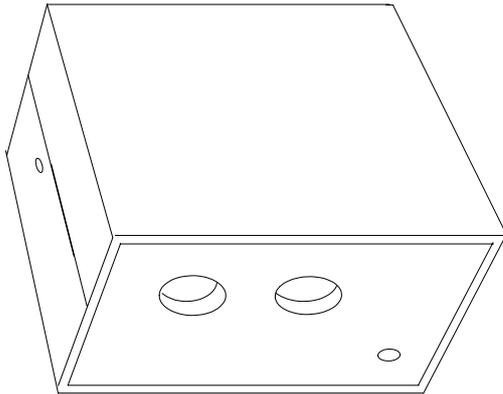

HOUSING	Black ABS
POWER SUPPLY	10.5-15V AC/DC
TRANSMITTER FREQUENCY	40 or 32 kHz
OPERATING TEMPERATURE	-20 to +50°C
CURRENT DRAW	70mA @ 12V
LEAD LENGTH	2 Metres
OUTPUT CONTACTS	N.O. AND N.C. 1A, 30V dc/ 250v ac
RANGE	Adjustable 50 to 3000 mm

- ❑ **Well defined detection area**
- ❑ **Easily installed and adjusted**
- ❑ **Relay output**
- ❑ **2 separate frequencies available to prevent cross-talk**
- ❑ **Optional “U” bracket mount available**

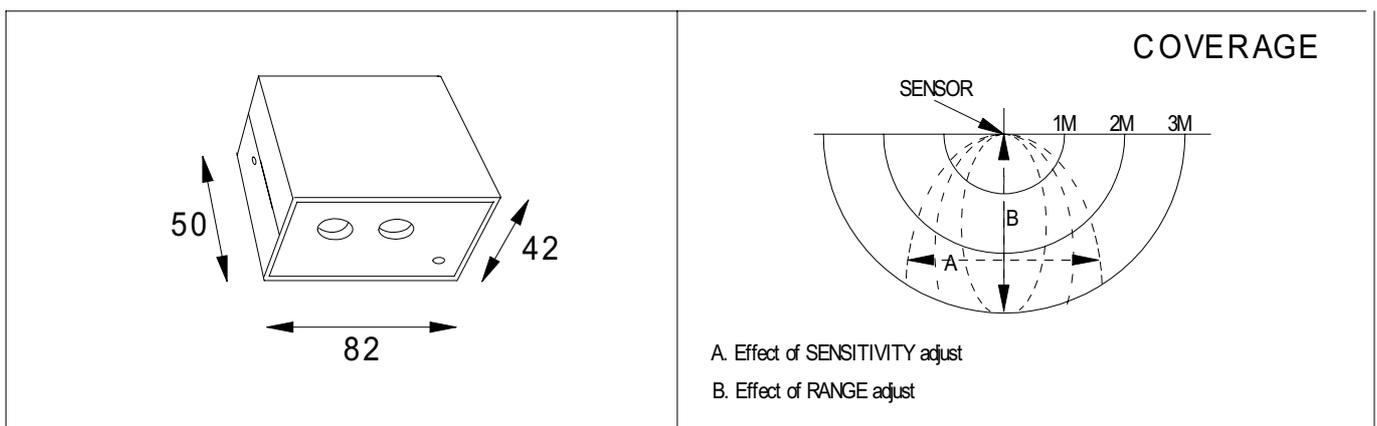

IN CONTROL



TRITON CONTROLS LTD., 4A EVENWOOD INDUSTRIAL ESTATE, BISHOP AUCKLAND, CO. DURHAM DL14 9SF

TEL.01388 833000 FAX 01388 833680

WEB. www.tritoncontrols.co.uk

e-mail info@tritoncontrols.co.uk