
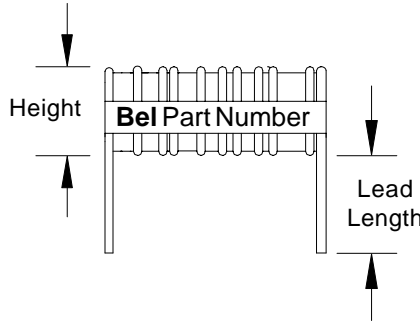


DC POWER INDUCTORS LOW COST THROUGH HOLE COMPONENTS


TM0026

Bel proudly announces a new series of components designed for today's environment that demands low cost, high quality, and availability.

MECHANICALS



SCHEMATIC



ELECTRICALS @ 25° C

Bel Fuse Inc. Part Number	OCL I _{dc} = 0 (μ H) Min	I _{dc} (Amps)	OCL @ I _{dc} (μ H) Typ	DCR Ω (ohms) Max	Outside Diameter (inches) Max	Height (inches) Max	Lead Diameter (inches)	Lead Length (inches) +/- 0.125"
0581-0296-20	28.8	2.0	27.0	0.06	0.61	0.26	0.020	0.750
0581-0186-25	18.2	2.5	12.4	0.04	0.53	0.22	0.020	0.375
0581-0406-25	40.2	2.5	34.8	0.07	0.69	0.32	0.020	0.375
0581-0836-25	82.8	2.5	73.3	0.10	0.79	0.32	0.020	0.375
0581-0256-25	24.9	2.5	24.4	0.04	0.64	0.32	0.025	0.375
0581-0546-30	53.6	3.0	46.3	0.05	0.79	0.35	0.025	0.375
0581-1256-30	124.7	3.0	100.4	0.09	1.20	0.49	0.025	0.375
0581-2326-30	232.4	3.0	200.1	0.14	1.23	0.56	0.025	0.875
0581-3846-30	383.9	3.0	311.4	0.20	1.50	0.62	0.025	0.875
0581-0806-35	79.8	3.5	65.3	0.04	1.30	0.49	0.032	0.375
0581-1346-40	133.7	4.0	108.4	0.07	1.23	0.56	0.032	0.875
0581-2326-40	232.2	4.0	181.7	0.10	1.50	0.62	0.032	0.875
0581-0336-40	33.3	4.0	30.5	0.03	0.82	0.39	0.032	0.375
0581-0186-50	17.8	5.0	16.3	0.03	0.80	0.29	0.032	0.750
0581-0806-50	79.8	5.0	64.4	0.04	1.40	0.59	0.042	0.875
0581-1416-50	140.5	5.0	109.6	0.05	1.50	0.62	0.042	0.875
0581-0486-50	48.3	5.0	37.8	0.02	1.25	0.51	0.042	0.375
0581-0846-70	84.4	7.0	64.2	0.03	1.50	0.62	0.052	0.875
0581-0436-70	43.2	7.0	35.2	0.02	1.30	0.60	0.052	0.875
0581-0496-A0	49.1	10.0	36.8	0.02	1.50	0.65	0.064	0.875

Corporate Office
Bel Fuse Inc.
 198 Van Vorst Street, Jersey City, NJ 07302-4496
 Tel: 201-432-0463
 Fax: 201-432-9542
 E-Mail: BelFuse@belfuse.com
 Internet: http://www.belfuse.com

Far East Office
Bel Fuse Ltd.
 8F/8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel: 852-2328-5515
 Fax: 852-2352-3706

European Office
Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Preston PR1 8UD
 Lancashire, U.K.
 Tel: 44-1772-556601
 Fax: 44-1772-888366