



Features

- DC to 3.0 GHz
- Flanged model
- Low VSWR
- Beryllium Oxide ceramic

Applications

- High power RF transmission

CHF9838CBF Series 250 W Power RF Flanged Chip Termination


General Specifications

SubstrateBeo
 Resistive Film.....Thick Film
 TabAg
 Cover Substrate.....AL2O3
 Mounting FlangeCu plated with Ni
 Resistance.....50 Ω
 Tolerance±5 %
 Packaging60 pcs./tray


Absolute Ratings

Power.....250 W
 Frequency3.0 GHz
 VSWR.....1.25 Maximum

Characteristic Curve

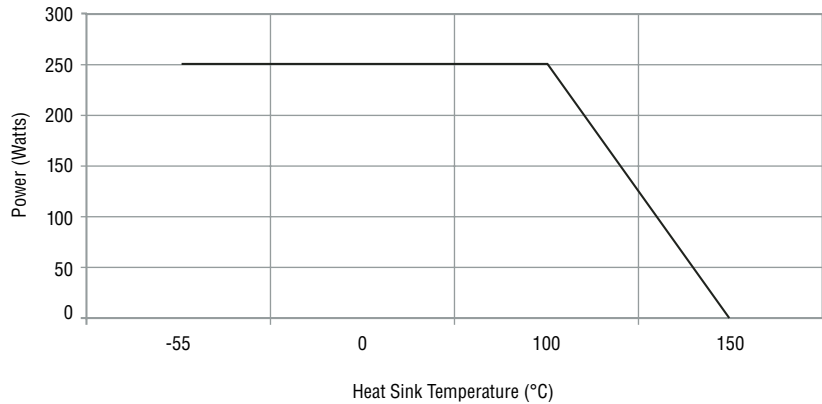

Product Dimensions

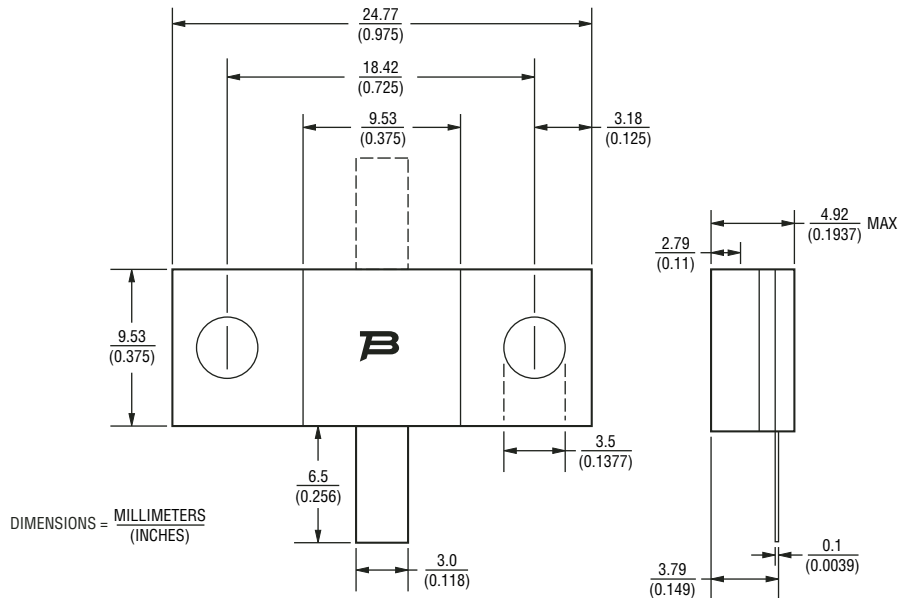

Reliable Electronic Solutions

Asia-Pacific:

Tel: +886-2 2562-4117
 Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555
 Fax: +41-41 768 5510

The Americas:

Tel: +1-951 781-5500
 Fax: +1-951 781-5700

www.bourns.com

How To Order

CHF 9838 C B F 500 L

Model _____

Size _____

Version _____

Substrate _____

Mount _____

F = Flange

Value _____

500 = 50 Ohm

Function _____

L = Termination