

ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET

RD12MVP1

RoHS Compliance, Silicon MOSFET Power Transistor, 175MHz, 10W

DESCRIPTION


RD12MVP1 is a MOS FET type transistor specifically designed for VHF RF power amplifiers applications.

FEATURES

- High Power Gain
Pout>10W, Gp>13dB@Vdd=7.2V,f=175MHz
- High Efficiency: 55%min. (175MHz)
- No gate protection diode

APPLICATION

For output stage of high power amplifiers in VHF band mobile radio sets.

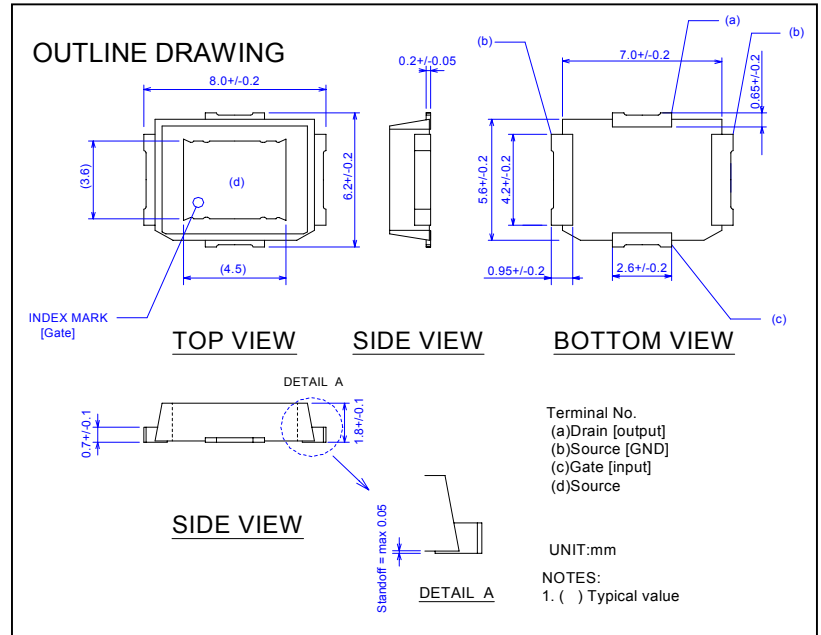

RoHS COMPLIANT

RD12MVP1 is a RoHS compliant product.

RoHS compliance is indicating by the letter "G" after the Lot Marking. This product includes the lead in high melting temperature type solders. However, it applicable to the following exceptions of RoHS Directions.

- 1.Lead in high melting temperature type solders (i.e. tin-lead older alloys containing more than85% lead.)

ABSOLUTE MAXIMUM RATINGS

(Tc=25°C, UNLESS OTHERWISE NOTED)


SYMBOL	PARAMETER	CONDITIONS	RATINGS	UNIT
V _{DSS}	Drain to Source Voltage	V _{GS} =0V	60	V
V _{GSS}	Gate to Source Voltage	V _{DS} =0V	-5 to +20	V
I _D	Drain Current		4.0	A
P _{in}	Input Power	Z _g =Z _l =50Ω	1.0	W
P _{ch}	Channel Dissipation	T _c =25°C	125	W
T _j	Junction Temperature		+150	°C
T _{stg}	Storage Temperature		-40 to +125	°C
R _{thj-c}	Thermal Resistance	Junction to Case	1.5	°C/W

Note: Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS (Tc=25°C, UNLESS OTHERWISE NOTED)

SYMBOL	PARAMETER	CONDITIONS	LIMITS			UNIT
			MIN.	TYP.	MAX.	
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =17V, V _{GS} =0V	-	-	10	uA
I _{GSS}	Gate to Source Leak Current	V _{GS} =10V, V _{DS} =0V	-	-	1.0	uA
V _{TH}	Gate Threshold Voltage	V _{DS} =12V, I _{DS} =1mA	1.8	-	4.4	V
P _{out}	Output Power	f=175MHz, V _{DD} =7.2V	10	12	-	W
η _D	Drain Efficiency	P _{in} =0.5W, I _{dq} =1.0A	55	57	-	%
VSWRT	Load VSWR tolerance	V _{DD} =9.5V, P _o =10W (Pin Control) f=175MHz, I _{dq} =1.0A, Z _g =50Ω Load VSWR=20:1 (All Phase)	No destroy			-

Note: Above parameters, ratings, limits and conditions are subject to change.









ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS


MITSUBISHI RF POWER MOS FET

RD12MVP1

RoHS Compliance, Silicon MOSFET Power Transistor, 175MHz, 10W

TYPICAL CHARACTERISTICS

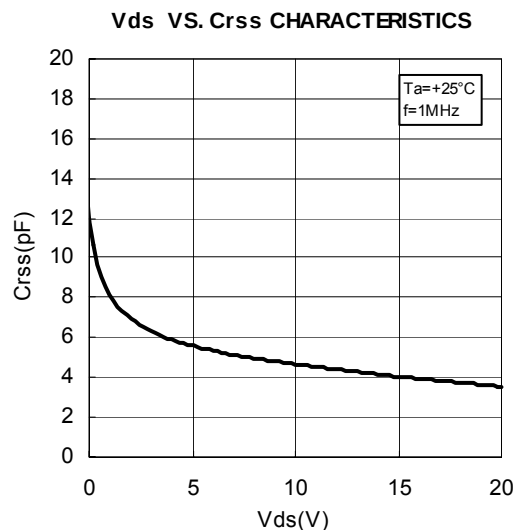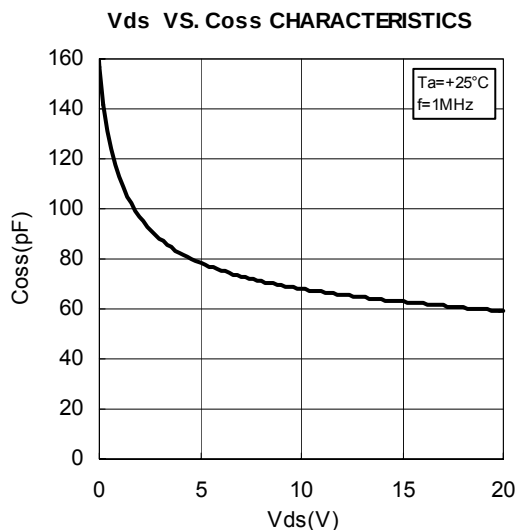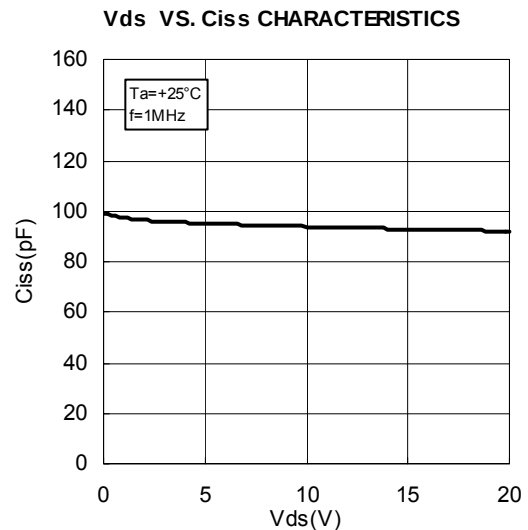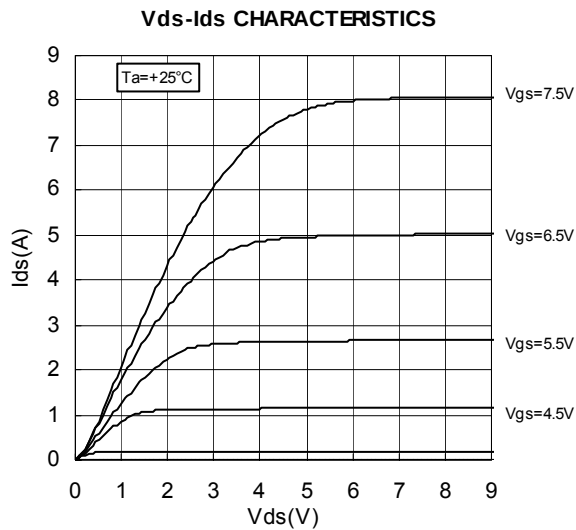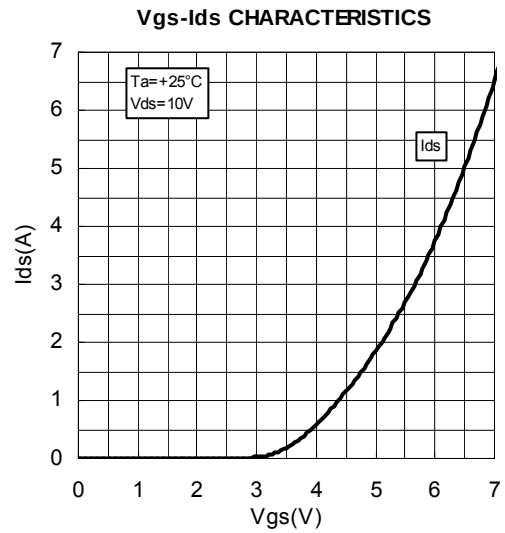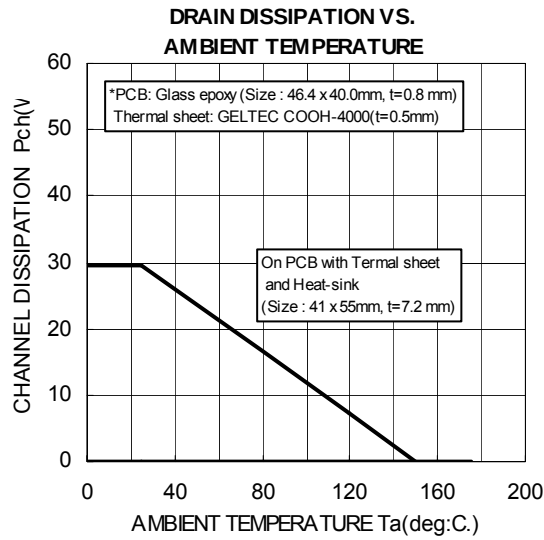



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS


MITSUBISHI RF POWER MOS FET

RD12MVP1


RoHS Compliance, Silicon MOSFET Power Transistor, 175MHz, 10W

TYPICAL CHARACTERISTICS


Pin-Po CHARACTERISTICS @f=175MHz

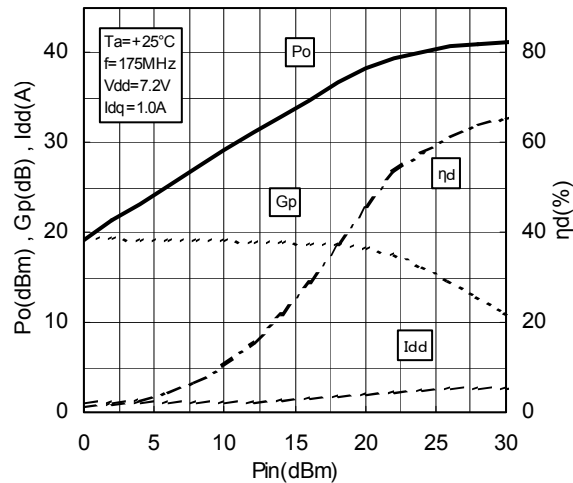


Pin-Po CHARACTERISTICS @f=175MHz

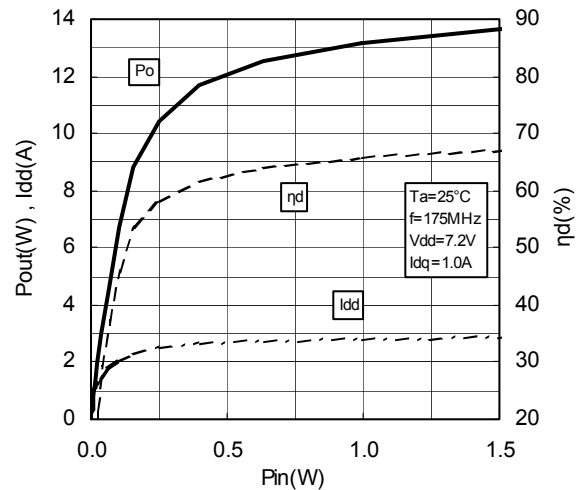

Vdd-Po CHARACTERISTICS @f=175MHz

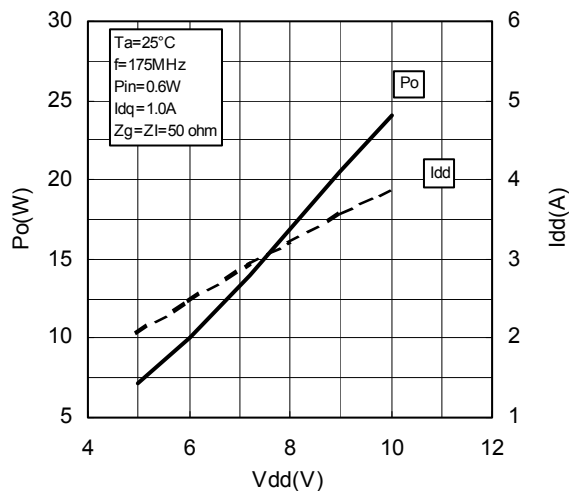




ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET

RD12MVP1


RoHS Compliance, Silicon MOSFET Power Transistor, 175MHz, 10W

TEST CIRCUIT (f=175MHz)

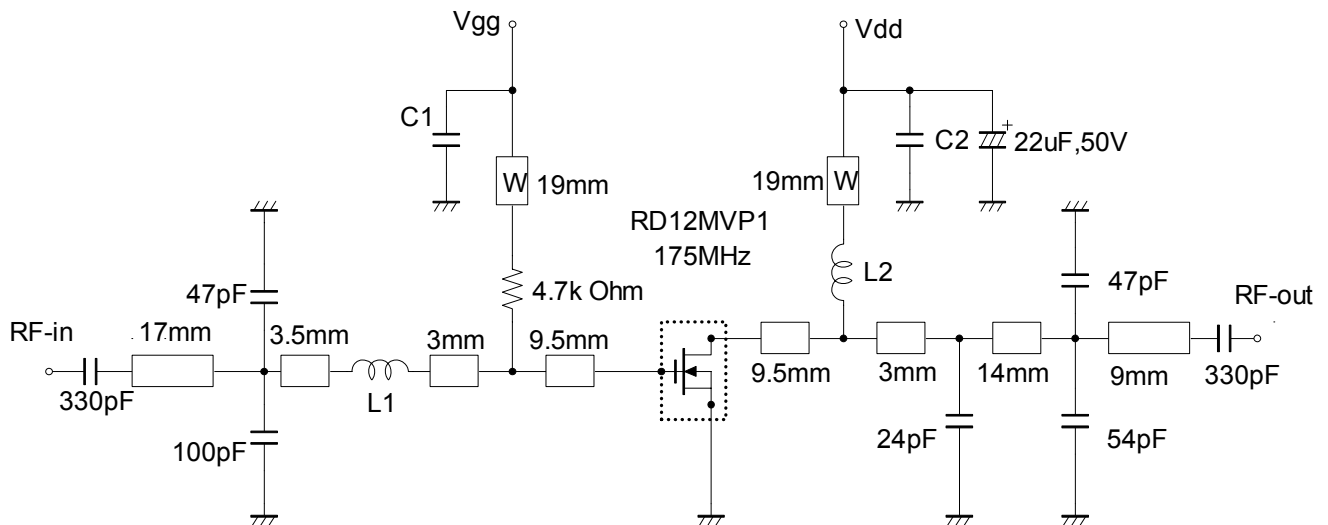

Note: Board material= glass-Epoxy Substrate
Micro strip line width=1.3mm/50OHM, $\epsilon_r=4.8$, $t=0.8$ mm
W: Line width=1.0mm

L1: 10.8nH, 4 Turns, D: 0.43mm, 1.66mm (outside diameter)
L2: 43.7nH, 6 Turns, D: 0.43mm, 2.46mm (outside diameter)
C1, C2: 2200pF



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS


MITSUBISHI RF POWER MOS FET

RD12MVP1

RoHS Compliance, Silicon MOSFET Power Transistor, 175MHz, 10W

RD12MVP1 S-PARAMETER DATA (@Vdd=7.2V, Id=500mA)

Freq. [MHz]	S11		S21		S12		S22	
	(mag)	(ang)	(mag)	(ang)	(mag)	(ang)	(mag)	(ang)
100	0.782	-165.5	6.105	69.0	0.024	-16.8	0.743	-162.7
125	0.801	-166.9	4.716	62.4	0.022	-20.5	0.766	-164.0
150	0.817	-168.0	3.724	56.4	0.021	-25.7	0.783	-165.6
175	0.833	-168.8	3.023	51.6	0.019	-27.3	0.799	-166.4
200	0.847	-169.7	2.519	47.5	0.016	-31.1	0.825	-167.2
225	0.860	-170.6	2.137	43.5	0.015	-30.0	0.845	-167.7
250	0.872	-171.6	1.828	39.6	0.013	-34.0	0.864	-168.6
275	0.882	-172.4	1.569	36.0	0.012	-30.9	0.871	-169.6
300	0.894	-173.0	1.361	33.4	0.010	-31.7	0.879	-170.4
325	0.901	-173.5	1.193	31.0	0.008	-24.1	0.888	-171.3
350	0.910	-174.2	1.062	28.5	0.007	-20.9	0.901	-172.1
375	0.917	-175.2	0.947	25.9	0.006	-13.8	0.915	-172.9
400	0.918	-176.1	0.844	23.5	0.005	-1.5	0.918	-173.6
425	0.923	-176.7	0.756	21.5	0.004	16.0	0.917	-174.4
450	0.930	-177.2	0.683	20.4	0.005	35.4	0.922	-174.8
475	0.933	-177.7	0.623	18.7	0.005	43.3	0.928	-175.5
500	0.938	-178.1	0.568	17.2	0.006	53.6	0.935	-176.3
525	0.939	-178.8	0.520	15.7	0.007	58.5	0.943	-176.8
550	0.942	-179.3	0.477	14.3	0.008	63.6	0.941	-177.1
575	0.943	-179.7	0.439	13.3	0.009	68.8	0.941	-177.8
600	0.946	-179.5	0.407	12.2	0.011	73.9	0.945	-178.3
625	0.950	-179.1	0.378	11.3	0.011	72.4	0.949	-178.9
650	0.950	-178.8	0.350	10.4	0.012	74.8	0.950	-179.5
675	0.953	-178.3	0.327	9.8	0.013	79.1	0.952	-179.8
700	0.952	-177.9	0.306	8.9	0.014	77.0	0.954	-179.8
725	0.954	-177.5	0.286	8.3	0.015	77.2	0.951	-179.4
750	0.955	-176.9	0.268	7.7	0.016	79.2	0.955	-178.9
775	0.954	-176.4	0.252	7.2	0.018	78.9	0.957	-178.6
800	0.955	-176.3	0.238	7.0	0.018	79.9	0.958	-178.1
825	0.958	-175.9	0.225	6.4	0.020	78.9	0.961	-177.7
850	0.958	-175.6	0.213	5.9	0.021	80.1	0.954	-177.5
875	0.956	-175.1	0.203	5.5	0.022	79.0	0.960	-177.3
900	0.958	-174.5	0.192	5.3	0.023	79.6	0.958	-176.8
925	0.956	-174.3	0.182	5.3	0.024	79.3	0.962	-176.4
950	0.958	-174.0	0.175	5.3	0.025	78.3	0.964	-176.0
975	0.957	-173.8	0.166	5.2	0.026	80.7	0.964	-176.0
1000	0.959	-173.6	0.158	5.7	0.026	78.8	0.962	-175.8



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS


mitsubishi RF POWER MOS FET

RD12MVP1

RoHS Compliance, Silicon MOSFET Power Transistor, 175MHz, 10W

RD12MVP1 S-PARAMETER DATA (@Vdd=7.2V, Id=900mA)

Freq. [MHz]	S11		S21		S12		S22	
	(mag)	(ang)	(mag)	(ang)	(mag)	(ang)	(mag)	(ang)
100	0.799	-169.4	5.980	72.2	0.021	-11.2	0.757	-166.6
125	0.813	-170.7	4.690	65.9	0.020	-14.9	0.780	-167.5
150	0.825	-171.3	3.726	60.1	0.019	-17.2	0.785	-168.8
175	0.835	-171.9	3.045	55.9	0.017	-21.5	0.794	-169.3
200	0.846	-172.5	2.569	52.3	0.016	-22.4	0.821	-169.3
225	0.857	-173.4	2.206	48.4	0.015	-21.1	0.846	-169.5
250	0.868	-174.3	1.904	44.3	0.013	-21.2	0.863	-170.4
275	0.877	-174.9	1.648	40.7	0.011	-21.3	0.864	-170.9
300	0.886	-175.3	1.436	38.2	0.010	-19.9	0.864	-171.4
325	0.895	-175.7	1.270	35.8	0.009	-15.8	0.876	-172.0
350	0.900	-176.4	1.141	33.1	0.008	-11.9	0.891	-172.6
375	0.907	-177.3	1.023	30.4	0.007	-7.2	0.906	-173.1
400	0.909	-178.1	0.917	27.7	0.007	1.3	0.915	-173.9
425	0.913	-178.7	0.820	25.8	0.005	20.2	0.908	-174.4
450	0.921	-179.1	0.745	24.6	0.006	27.4	0.910	-174.5
475	0.925	-179.6	0.683	23.0	0.006	36.9	0.921	-175.2
500	0.932	-180.0	0.627	21.2	0.007	50.8	0.933	-175.9
525	0.931	179.2	0.575	19.4	0.007	53.6	0.937	-176.6
550	0.933	178.6	0.529	18.1	0.008	57.3	0.935	-176.8
575	0.937	178.0	0.486	16.6	0.009	67.9	0.931	-177.0
600	0.943	177.7	0.452	16.1	0.010	70.4	0.935	-177.4
625	0.943	177.3	0.422	14.9	0.011	70.9	0.945	-178.0
650	0.946	177.0	0.391	14.0	0.013	73.8	0.948	-178.6
675	0.947	176.6	0.366	12.7	0.013	75.6	0.946	-179.0
700	0.946	175.9	0.341	12.0	0.015	76.9	0.946	-179.3
725	0.951	175.5	0.322	11.3	0.015	75.8	0.945	-179.6
750	0.949	175.0	0.302	10.5	0.016	76.4	0.949	179.9
775	0.951	174.7	0.284	9.6	0.017	77.8	0.952	179.4
800	0.950	174.5	0.269	9.3	0.019	79.0	0.955	179.0
825	0.956	174.3	0.253	9.2	0.020	77.8	0.954	178.9
850	0.956	173.7	0.240	8.7	0.020	78.7	0.950	178.9
875	0.956	173.3	0.228	7.9	0.021	78.7	0.952	178.4
900	0.953	172.8	0.218	7.1	0.023	77.3	0.953	177.9
925	0.948	172.5	0.206	6.6	0.024	76.8	0.958	177.4
950	0.955	172.2	0.196	7.0	0.024	78.3	0.959	177.3
975	0.955	172.0	0.186	7.3	0.025	78.6	0.958	177.4
1000	0.957	171.8	0.178	7.1	0.026	79.1	0.956	177.1



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

mitsubishi RF POWER MOS FET

RD12MVP1

RoHS Compliance, Silicon MOSFET Power Transistor, 175MHz, 10W

Keep safety first in your circuit designs!

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Warning!

Do not use the device at the exceeded the maximum rating condition. In case of plastic molded devices, the exceeded maximum rating condition may cause blowout, smoldering or catch fire of the molding resin due to extreme short current flow between the drain and the source of the device. These results causes in fire or injury.