


VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREIMTH IS NOT TO BE REPRODUCED. USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYOWE WITHOUT PERMISSION OF YEOR CORP.

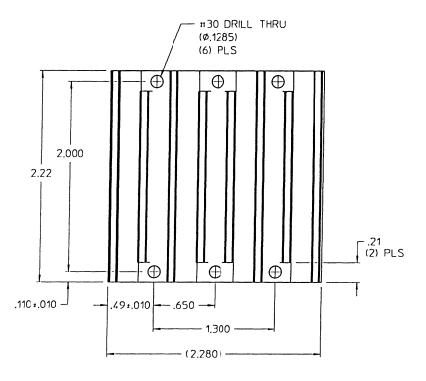

REV.	DESCRIPTION		DATE	APPROVED
m1	RELEASED FOR DEVELOPMENT	DPK	5/8/97	SWN
=2	REVISED PROFILE . 190 WAS .170	DPK	9/18/97	SWN
#3	ADDED TOP RIGHT VIEW: REVISED NOTES	DPK	10/1/97	SWN
=4	MAKE FROM EXTEN PIN WAS 15983.	DPK	10/3/97	SWN
# 5	2 PLC DIMS 2 20 49 .90 .10 .19 W/ 3 PLC	DPK	10/17/97	SWN
# 6	2.22 WAS 2.20. ADDED ±.010 TOL	DPK	12/10/97	SWN



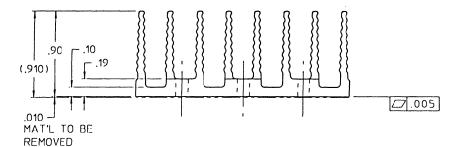

NOTES

- 1. MAKE FROM VICOR EXTRUSION P/N 15988.
- 2. REMOVE ALL BURRS AND SHARP EDGES.
- 3. FINISH, CLEAR CHROMATE.
- 4. STAMP PART NUMBER AND REVISION USING .15 HIGH CHARACTERS APPROX. WHERE SHOWN

ORIGINAL ONLY WHEN STAMPED IN RED

COPY

ORAWN BY	5/97	MILVICOR			
UMESS OTHERWISE SPECIFED DIMENSIONS ARE N INCHES- TOLEHANCES ARE FRATIONS DECIMALS ANGLES 1364 XX - 101 11 XXX-105		Vilm			
		HTSNK, "B" X-FLOW, .9H LOW FLOW, THRU HOLE			
THE ANGLE PRO	DECTION	SIZE FSCM NO. DWG NO 17572	# G		
DO NOT SCALE IN	NAWAS	SCALE 2-1 SHEET 1	o⊩ 1		