

AF-09616A

•96 x 16 dots

1/33 Duty

FEATURE


1.Construction : FSTN LCD and COF.

2.Driver : NT7501

3.Extended temperature type,
with temperature compensation circuit.

液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

BLOCK DIAGRAM

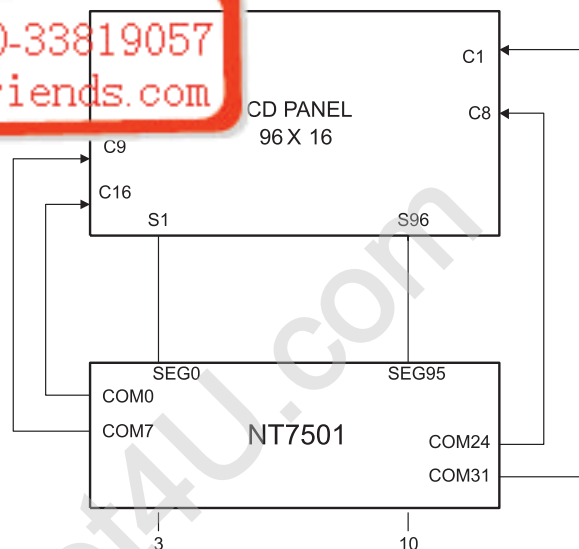


ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Condition	Typ.Value	Unit.
LCD Driving Voltage	V0-V5	25°C	7.40	V
Supply Current	IDD	VDD=3.3V	0.2	mA

INTERFACE

1	2	3	4	5	6	7	8	9	10
NC	NC	VSS	SI	SCLK	VDD	A0	/CS	/RES	VSS

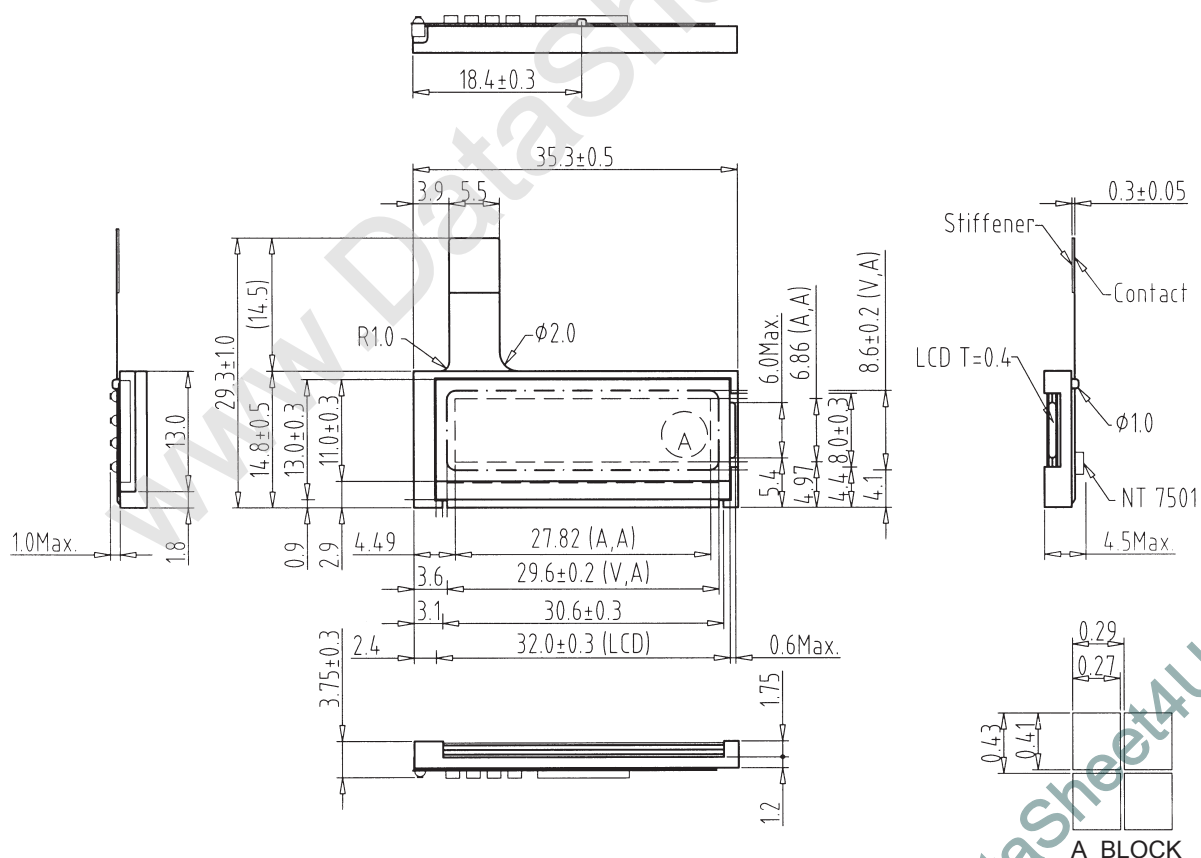

Connector

CN1: Molex:52745-1090/52746-1090