


## SINGLE BUFFER/DRIVER (OPEN DRAIN)

- 5V TOLERANT INPUTS
- HIGH SPEED:  $t_{PD} = 4.2ns$  (MAX.) at  $V_{CC} = 3.3V$
- LOW POWER DISSIPATION:  
 $I_{CC} = 1\mu A$  (MAX.) at  $T_A = 25^\circ C$
- POWER DOWN PROTECTION ON INPUTS AND OUTPUTS
- POWER DOWN PROTECTION ON INPUT
- OPERATING VOLTAGE RANGE:  
 $V_{CC}(OPR) = 1.65V$  to  $5.5V$   
(1.2V Data Retention)
- IMPROVED LATCH-UP IMMUNITY

### DESCRIPTION

The 74LX1G07 is a low voltage CMOS SINGLE BUFFER (OPEN DRAIN) fabricated with sub-micron silicon gate and double-layer metal wiring C<sup>2</sup>MOS technology.

The internal circuit is composed of 2 stages including buffer output, which provide high noise immunity and stable output.

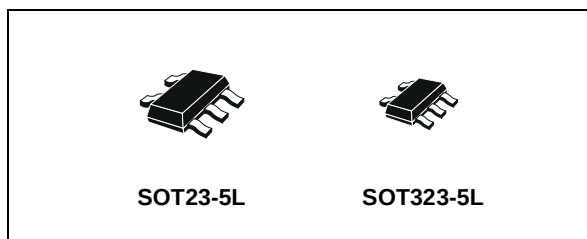


### ORDER CODES

| PACKAGE   | T & R       |
|-----------|-------------|
| SOT23-5L  | 74LX1G07STR |
| SOT323-5L | 74LX1G07CTR |


Power down protection is provided on input and 0 to 7V can be accepted on input with no regard to the supply voltage. This device can be used to interface 5V to 3V.

### PIN CONNECTION AND IEC LOGIC SYMBOLS

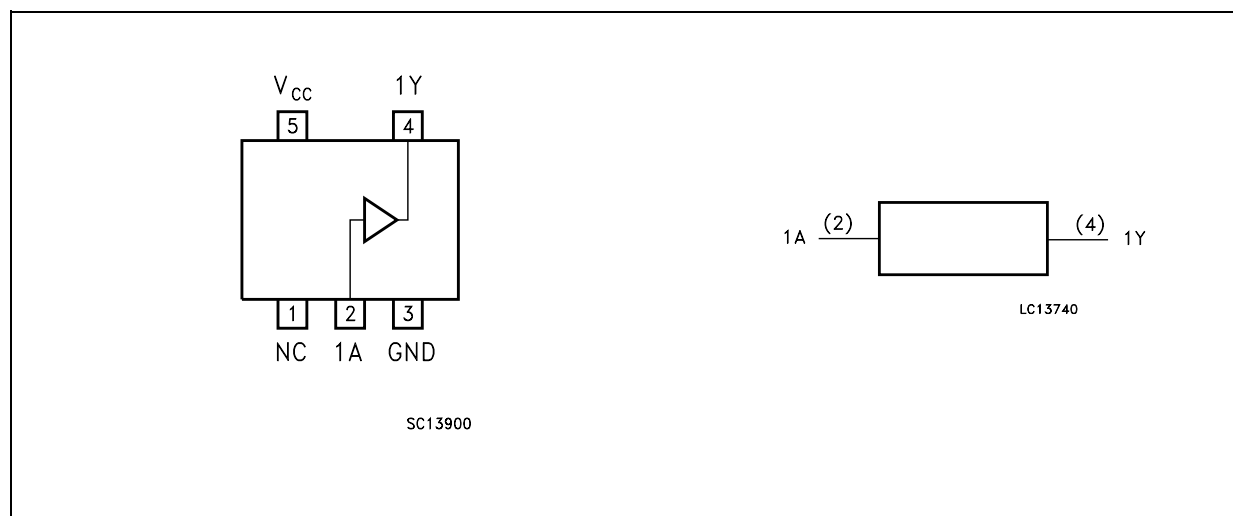

74LX1G07

INPUT AND OUTPUT EQUIVALENT CIRCUIT

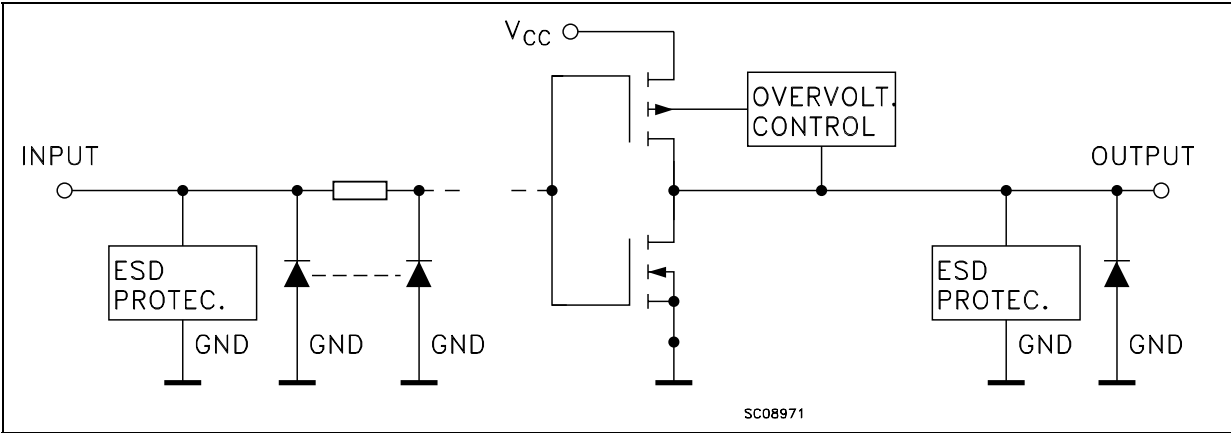

PIN DESCRIPTION

| PIN No | SYMBOL          | NAME AND FUNCTION       |
|--------|-----------------|-------------------------|
| 1      | NC              | Not Connected           |
| 2      | 1A              | Data Input              |
| 4      | 1Y              | Data Output             |
| 3      | GND             | Ground (0V)             |
| 5      | V <sub>CC</sub> | Positive Supply Voltage |

TRUTH TABLE

| A | Y |
|---|---|
| L | L |
| H | Z |

Z: High Impedance

ABSOLUTE MAXIMUM RATINGS

| Symbol           | Parameter                                      | Value                         | Unit |
|------------------|------------------------------------------------|-------------------------------|------|
| V <sub>CC</sub>  | Supply Voltage                                 | -0.5 to +7.0                  | V    |
| V <sub>I</sub>   | DC Input Voltage                               | -0.5 to +7.0                  | V    |
| V <sub>O</sub>   | DC Output Voltage (V <sub>CC</sub> = 0V)       | -0.5 to +7.0                  | V    |
| V <sub>O</sub>   | DC Output Voltage (High or Low State) (note 1) | -0.5 to V <sub>CC</sub> + 0.5 | V    |
| I <sub>IK</sub>  | DC Input Diode Current                         | - 50                          | mA   |
| I <sub>OK</sub>  | DC Output Diode Current (note 2)               | - 50                          | mA   |
| I <sub>O</sub>   | DC Output Current                              | ± 50                          | mA   |
| I <sub>CC</sub>  | DC Supply Current per Supply Pin               | ± 100                         | mA   |
| I <sub>GND</sub> | DC Ground Current per Supply Pin               | ± 100                         | mA   |
| T <sub>stg</sub> | Storage Temperature                            | -65 to +150                   | °C   |
| T <sub>L</sub>   | Lead Temperature (10 sec)                      | 300                           | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

## RECOMMENDED OPERATING CONDITIONS

| Symbol   | Parameter                                                      | Value         | Unit |
|----------|----------------------------------------------------------------|---------------|------|
| $V_{CC}$ | Supply Voltage (note 1)                                        | 1.65 to 5.5   | V    |
| $V_I$    | Input Voltage                                                  | 0 to 5.5      | V    |
| $V_O$    | Output Voltage ( $V_{CC} = 0V$ )                               | 0 to 5.5      | V    |
| $V_O$    | Output Voltage (High or Low State)                             | 0 to $V_{CC}$ | V    |
| $I_{OL}$ | High or Low Level Output Current ( $V_{CC} = 4.5$ to $5.5V$ )  | + 32          | mA   |
| $I_{OL}$ | High or Low Level Output Current ( $V_{CC} = 3.0$ to $3.6V$ )  | +24           | mA   |
| $I_{OL}$ | High or Low Level Output Current ( $V_{CC} = 2.7$ to $3.0V$ )  | + 12          | mA   |
| $I_{OL}$ | High or Low Level Output Current ( $V_{CC} = 2.3$ to $2.7V$ )  | + 8           | mA   |
| $I_{OL}$ | High or Low Level Output Current ( $V_{CC} = 1.65$ to $2.3V$ ) | + 4           | mA   |
| $T_{op}$ | Operating Temperature                                          | -55 to 125    | °C   |
| dt/dv    | Input Rise and Fall Time (note 2)                              | 0 to 10       | ns/V |

1) Truth Table guaranteed: 1.2V to 3.6V

2)  $V_{IN}$  from 0.8V to 2V at  $V_{CC} = 3.0V$ 

## DC SPECIFICATIONS

| Symbol           | Parameter                             | Test Condition         |                                                | Value               |                     |                     |                     | Unit |
|------------------|---------------------------------------|------------------------|------------------------------------------------|---------------------|---------------------|---------------------|---------------------|------|
|                  |                                       | V <sub>CC</sub><br>(V) |                                                | -40 to 85 °C        |                     | -55 to 125 °C       |                     |      |
|                  |                                       |                        |                                                | Min.                | Max.                | Min.                | Max.                |      |
| V <sub>IH</sub>  | High Level Input Voltage              | 1.65 to 1.95           |                                                | 0.75V <sub>CC</sub> |                     | 0.75V <sub>CC</sub> |                     | V    |
|                  |                                       | 2.3 to 2.7             |                                                | 0.7V <sub>CC</sub>  |                     | 0.7V <sub>CC</sub>  |                     |      |
|                  |                                       | 3.0 to 5.5             |                                                | 0.7V <sub>CC</sub>  |                     | 0.7V <sub>CC</sub>  |                     |      |
| V <sub>IL</sub>  | Low Level Input Voltage               | 1.65 to 1.95           |                                                |                     | 0.25V <sub>CC</sub> |                     | 0.25V <sub>CC</sub> | V    |
|                  |                                       | 2.3 to 2.7             |                                                |                     | 0.3V <sub>CC</sub>  |                     | 0.3V <sub>CC</sub>  |      |
|                  |                                       | 3.0 to 5.5             |                                                |                     | 0.3V <sub>CC</sub>  |                     | 0.3V <sub>CC</sub>  |      |
| V <sub>OL</sub>  | Low Level Output Voltage              | 1.65 to 4.5            | I <sub>O</sub> =100 μA                         |                     | 0.1                 |                     | 0.1                 | V    |
|                  |                                       | 1.65                   | I <sub>O</sub> =4 mA                           |                     | 0.45                |                     | 0.45                |      |
|                  |                                       | 2.3                    | I <sub>O</sub> =8 mA                           |                     | 0.3                 |                     | 0.3                 |      |
|                  |                                       | 3.0                    | I <sub>O</sub> =16 mA                          |                     | 0.4                 |                     | 0.4                 |      |
|                  |                                       |                        | I <sub>O</sub> =24 mA                          |                     | 0.55                |                     | 0.55                |      |
|                  |                                       | 4.5                    | I <sub>O</sub> =32 mA                          |                     | 0.55                |                     | 0.55                |      |
| I <sub>OZ</sub>  | High Impedance Output Leakage Current | 3.6                    | V <sub>I</sub> = 0 to 5.5V                     |                     | ± 10                |                     | ± 10                | μA   |
| I <sub>I</sub>   | Input Leakage Current                 | 1.65 to 5.5            | V <sub>I</sub> = 0 to 5.5V                     |                     | ± 10                |                     | ± 10                | μA   |
| I <sub>off</sub> | Power Off Leakage Current             | 0                      | V <sub>I</sub> or V <sub>O</sub> = 5.5V        |                     | 10                  |                     | 10                  | μA   |
| I <sub>CC</sub>  | Quiescent Supply Current              | 1.65 to 5.5            | V <sub>I</sub> = V <sub>CC</sub> or GND        |                     | 10                  |                     | 10                  | μA   |
|                  |                                       | 3.6                    | V <sub>I</sub> or V <sub>O</sub> = 3.6 to 5.5V |                     | ± 10                |                     | ± 10                |      |

## AC ELECTRICAL CHARACTERISTICS


| Symbol           | Parameter              | Test Condition         |                        |                       |                                         | Value        |      |               |      | Unit |
|------------------|------------------------|------------------------|------------------------|-----------------------|-----------------------------------------|--------------|------|---------------|------|------|
|                  |                        | V <sub>CC</sub><br>(V) | C <sub>L</sub><br>(pF) | R <sub>1</sub><br>(Ω) | t <sub>s</sub> = t <sub>r</sub><br>(ns) | -40 to 85 °C |      | -55 to 125 °C |      |      |
|                  |                        |                        |                        |                       |                                         | Min.         | Max. | Min.          | Max. |      |
| t <sub>PLZ</sub> | Propagation Delay Time | 1.65 to 1.95           | 30                     | 1000                  | 2.0                                     | 1.8          | 8.3  | 1.8           | 8.3  | ns   |
|                  |                        | 2.3 to 2.7             | 30                     | 500                   | 2.0                                     | 1.2          | 5.5  | 1.2           | 5.5  |      |
|                  |                        | 2.7                    | 50                     | 500                   | 2.5                                     | 1            | 5    | 1             | 5    |      |
|                  |                        | 3.0 to 3.6             | 50                     | 500                   | 2.5                                     | 0.8          | 4.2  | 0.8           | 4.2  |      |
|                  |                        | 4.5 to 5.5             | 50                     | 500                   | 2.5                                     | 0.5          | 3.5  | 0.5           | 3.5  |      |
| t <sub>PZL</sub> | Propagation Delay Time | 1.65 to 1.95           | 30                     | 1000                  | 2.0                                     | 1.8          | 8.3  | 1.8           | 8.3  | ns   |
|                  |                        | 2.3 to 2.7             | 30                     | 500                   | 2.0                                     | 1.2          | 5.5  | 1.2           | 5.5  |      |
|                  |                        | 2.7                    | 50                     | 500                   | 2.5                                     | 1            | 5    | 1             | 5    |      |
|                  |                        | 3.0 to 3.6             | 50                     | 500                   | 2.5                                     | 0.8          | 4.2  | 0.8           | 4.2  |      |
|                  |                        | 4.5 to 5.5             | 50                     | 500                   | 2.5                                     | 0.5          | 3.5  | 0.5           | 3.5  |      |

## CAPACITIVE CHARACTERISTICS

| Symbol           | Parameter                                 | Test Condition         |                                        | Value                  |      |      | Unit |
|------------------|-------------------------------------------|------------------------|----------------------------------------|------------------------|------|------|------|
|                  |                                           | V <sub>CC</sub><br>(V) |                                        | T <sub>A</sub> = 25 °C |      |      |      |
|                  |                                           |                        |                                        | Min.                   | Typ. | Max. |      |
| C <sub>IN</sub>  | Input Capacitance                         | 3.3                    | V <sub>IN</sub> = 0 or V <sub>CC</sub> |                        | 2.5  |      | pF   |
| C <sub>OUT</sub> | Output Capacitance                        | 3.3                    | V <sub>IN</sub> = 0 or V <sub>CC</sub> |                        | 4    |      | pF   |
| C <sub>PD</sub>  | Power Dissipation Capacitance<br>(note 1) | 1.8                    | f <sub>IN</sub> = 10MHz                |                        | 16   |      | pF   |
|                  |                                           | 2.5                    |                                        |                        | 18   |      |      |
|                  |                                           | 3.3                    |                                        |                        | 20   |      |      |

1) C<sub>PD</sub> is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation.  $I_{CC(opr)} = C_{PD} \times V_{CC} \times f_{IN} + I_{CC}$


## TEST CIRCUIT

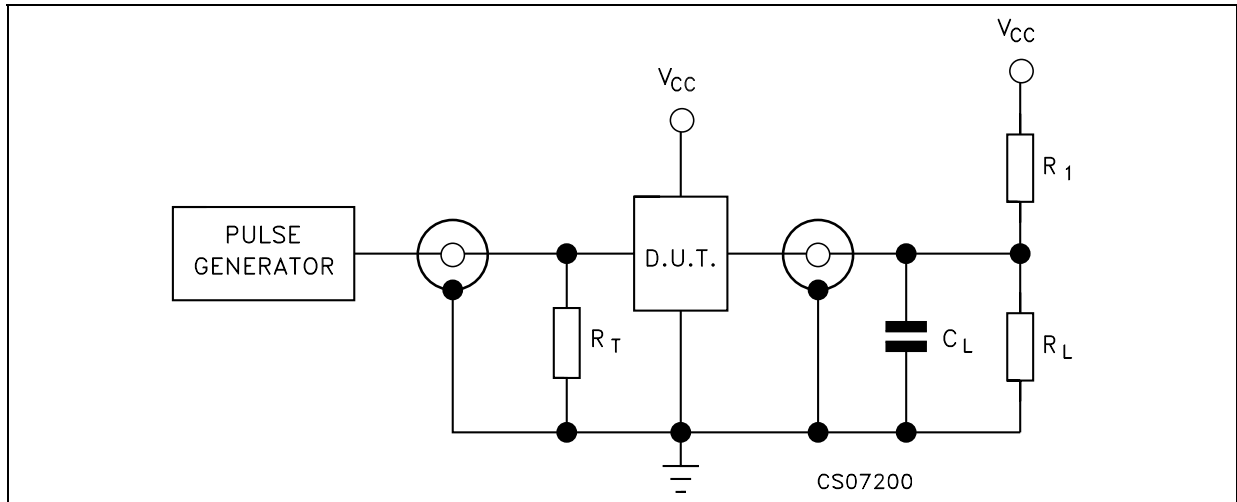

$R_T = Z_{OUT}$  of pulse generator (typically 50Ω)


## TEST CIRCUIT AND WAVEFORM SYMBOL VALUE

| Symbol      | $V_{CC}$      |             |             |
|-------------|---------------|-------------|-------------|
|             | 1.65 to 1.95V | 2.3 to 2.7V | 2.7 to 5.5V |
| $C_L$       | 30pF          | 30pF/50pF   | 50pF        |
| $R_1=R_L$   | 1000Ω         | 500Ω        | 500Ω        |
| $V_{IH}$    | $V_{CC}$      | $V_{CC}$    | $V_{CC}$    |
| $V_M$       | $V_{CC}/2$    | $V_{CC}/2$  | $V_{CC}/2$  |
| $t_r = t_f$ | <2.0ns        | <2.0ns      | <2.5ns      |

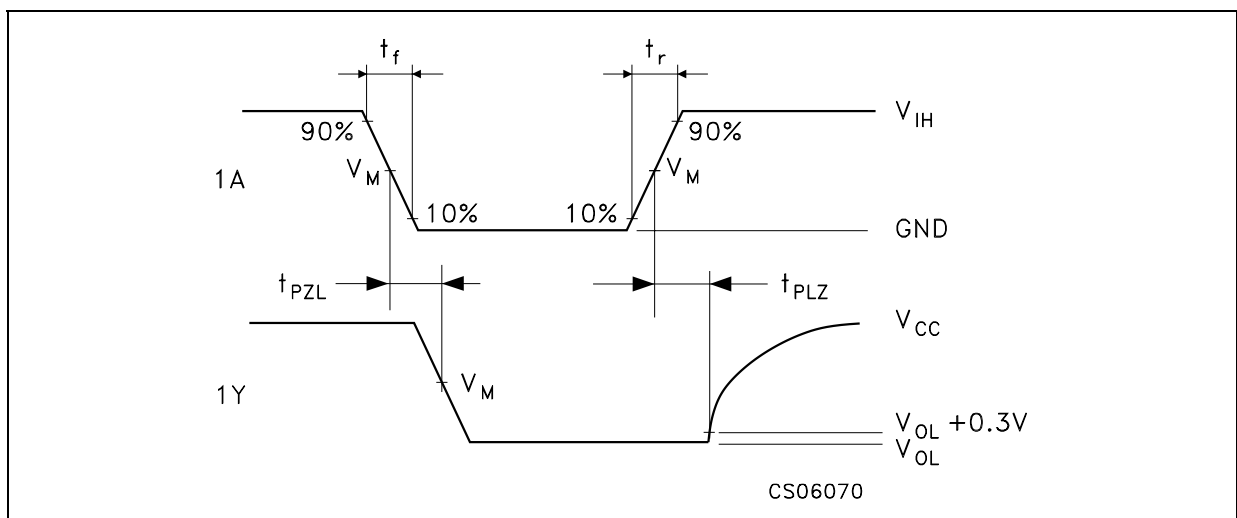WAVEFORM: PROPAGATION DELAY ( $f=1\text{MHz}$ ; 50% duty cycle)


## SOT23-5L MECHANICAL DATA

| DIM. | mm.  |     |      | mils  |      |       |
|------|------|-----|------|-------|------|-------|
|      | MIN. | TYP | MAX. | MIN.  | TYP. | MAX.  |
| A    | 0.90 |     | 1.45 | 35.4  |      | 57.1  |
| A1   | 0.00 |     | 0.15 | 0.0   |      | 5.9   |
| A2   | 0.90 |     | 1.30 | 35.4  |      | 51.2  |
| b    | 0.35 |     | 0.50 | 13.7  |      | 19.7  |
| C    | 0.09 |     | 0.20 | 3.5   |      | 7.8   |
| D    | 2.80 |     | 3.00 | 110.2 |      | 118.1 |
| E    | 2.60 |     | 3.00 | 102.3 |      | 118.1 |
| E1   | 1.50 |     | 1.75 | 59.0  |      | 68.8  |
| e    | 0    | .95 |      |       | 37.4 |       |
| e1   |      | 1.9 |      |       | 74.8 |       |
| L    | 0.35 |     | 0.55 | 13.7  |      | 21.6  |

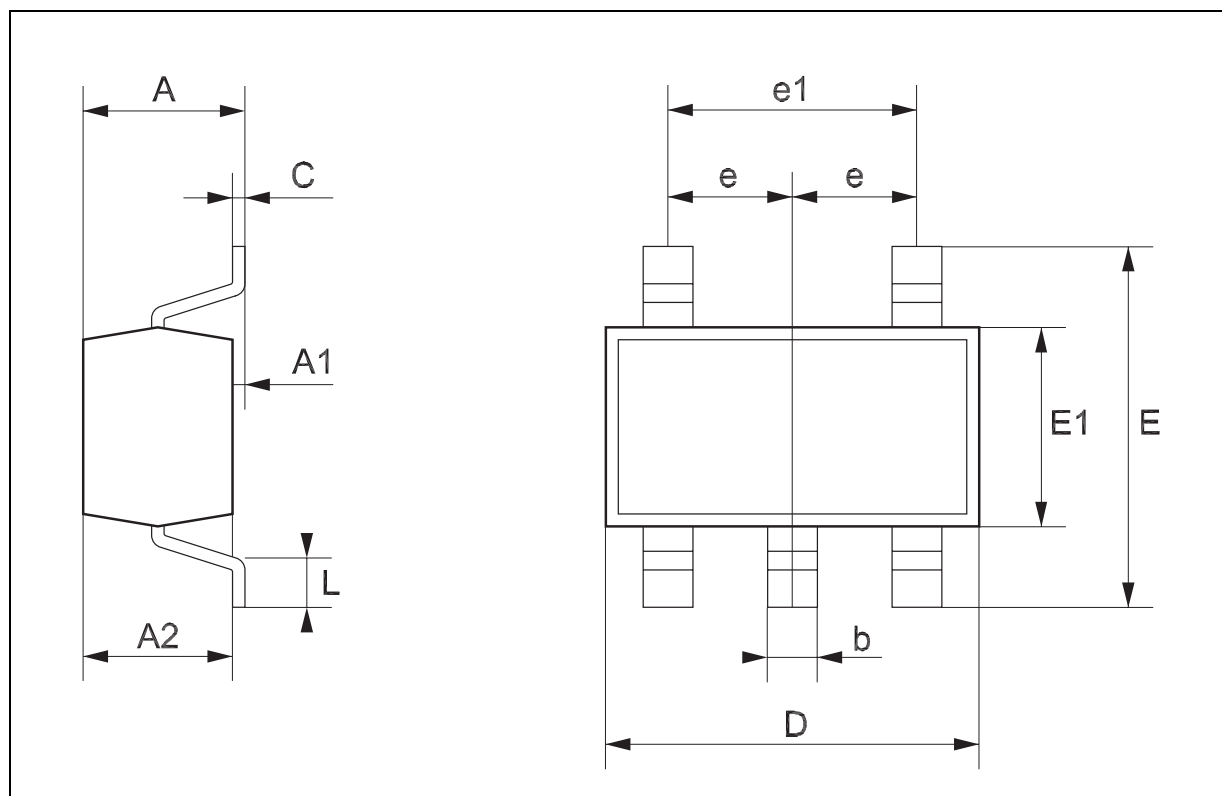


## SOT323-5L MECHANICAL DATA

| DIM. | mm.  |     |      | mils |      |      |
|------|------|-----|------|------|------|------|
|      | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A    | 0.80 |     | 1.10 | 31.5 |      | 43.3 |
| A1   | 0.00 |     | 0.10 | 0.0  |      | 3.9  |
| A2   | 0.80 |     | 1.00 | 31.5 |      | 39.4 |
| b    | 0.15 |     | 0.30 | 5.9  |      | 11.8 |
| C    | 0.10 |     | 0.18 | 3.9  |      | 7.1  |
| D    | 1.80 |     | 2.20 | 70.9 |      | 86.6 |
| E    | 1.80 |     | 2.40 | 70.9 |      | 94.5 |
| E1   | 1.15 |     | 1.35 | 45.3 |      | 53.1 |
| e    | 0    | .65 |      |      | 25.6 |      |
| e1   |      | 1.3 |      |      | 51.2 |      |
| L    | 0.10 |     | 0.30 | 3.9  |      | 11.8 |

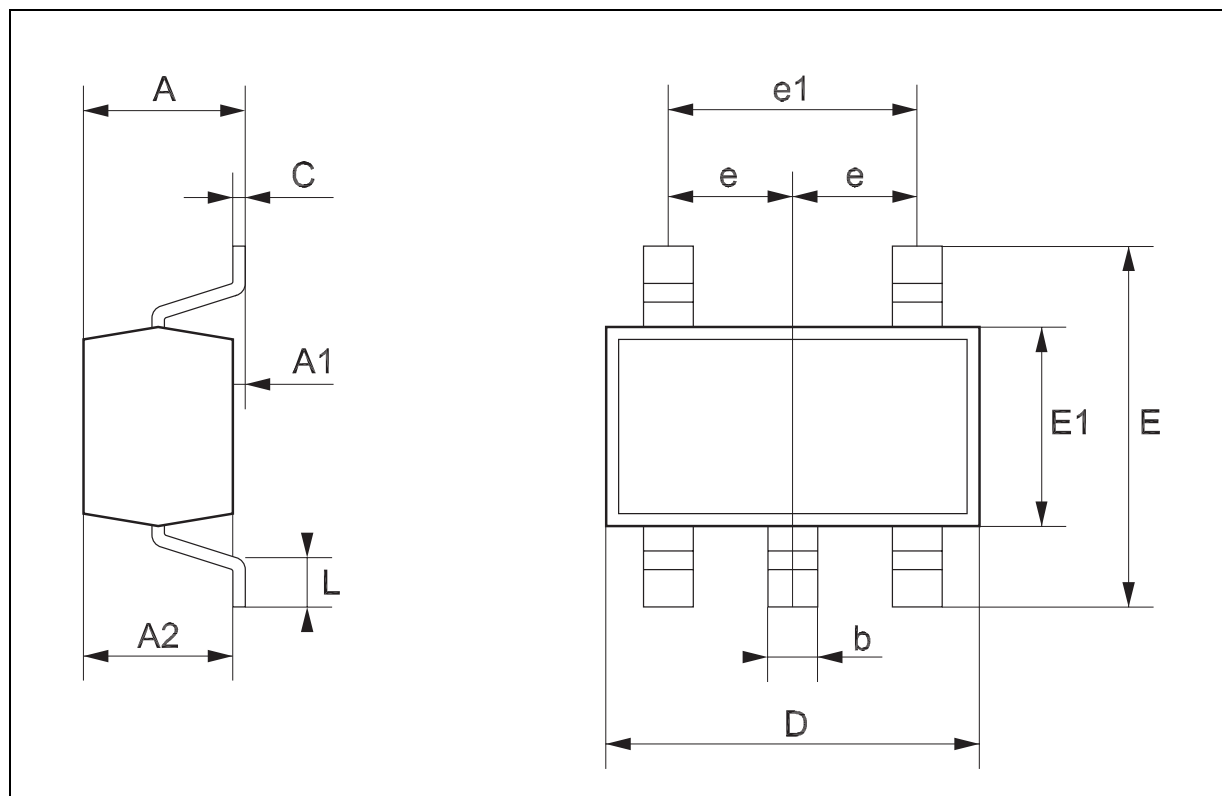


## Tape &amp; Reel SOT23-xL MECHANICAL DATA

| DIM. | mm.  |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | MIN. | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    |      |      | 180  |       |       | 7.086 |
| C    | 12.8 | 13.0 | 13.2 | 0.504 | 0.512 | 0.519 |
| D    | 20.2 |      |      | 0.795 |       |       |
| N    | 60   |      |      | 2.362 |       |       |
| T    |      |      | 14.4 |       |       | 0.567 |
| Ao   | 3.13 | 3.23 | 3.33 | 0.123 | 0.127 | 0.131 |
| Bo   | 3.07 | 3.17 | 3.27 | 0.120 | 0.124 | 0.128 |
| Ko   | 1.27 | 1.37 | 1.47 | 0.050 | 0.054 | 0.058 |
| Po   | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161 |
| P    | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161 |

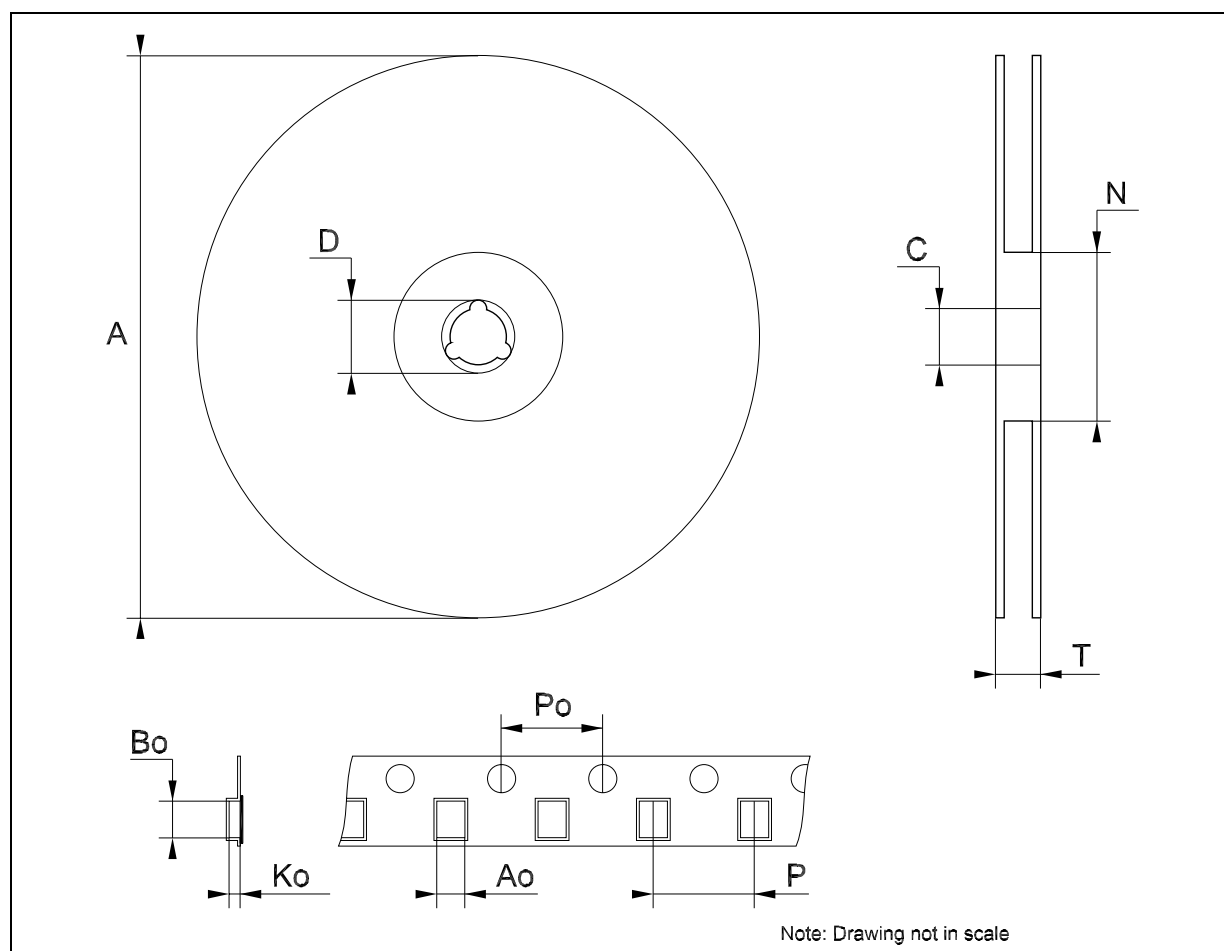

# Tape & Reel SOT323-xL MECHANICAL DATA

| DIM. | mm.  |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | MIN. | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 175  | 180  | 185  | 6.889 | 7.086 | 7.283 |
| C    | 12.8 | 13   | 13.2 | 0.504 | 0.512 | 0.519 |
| D    | 20.2 |      |      | 0.795 |       |       |
| N    | 59.5 | 60   | 60.5 |       | 2.362 |       |
| T    |      |      | 14.4 |       |       | 0.567 |
| Ao   |      | 2.25 |      |       | 0.088 |       |
| Bo   |      | 2.7  |      |       | 0.106 |       |
| Ko   |      | 1.2  |      |       | 0.047 |       |
| Po   | 3.98 | 4    | 4.2  | 0.156 | 0.157 | 0.165 |
| P    | 3.98 | 4    | 4.2  | 0.156 | 0.157 | 0.165 |

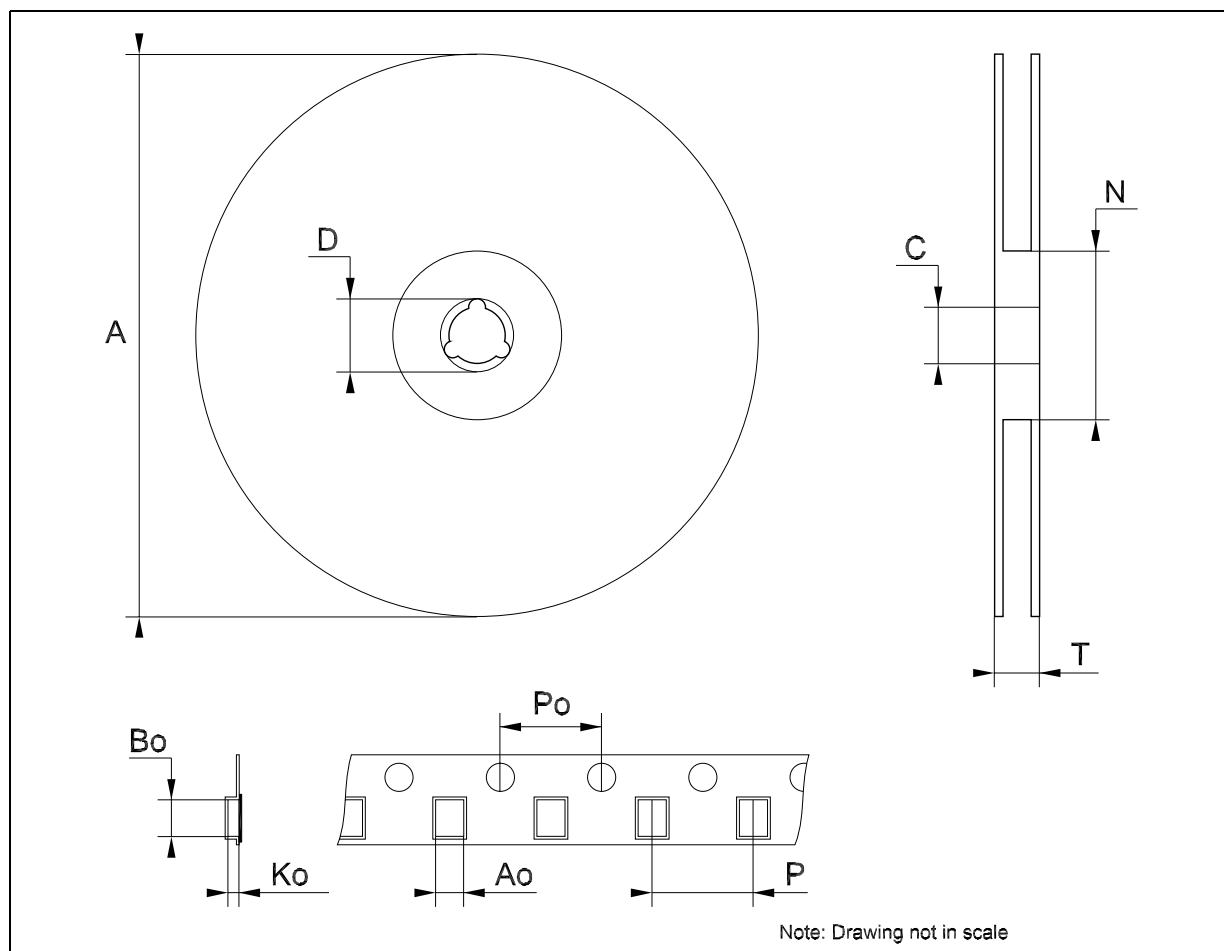

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES