

Compact low speed thick film thermal printhead (8 dots / mm)

KF2002-GF10A

The KF2002-GF10A is a standard type 5 V thermal printhead, developed mainly for handy printers. Maximum printing speed of 2 inch / second is possible.


●Applications

Handy printers
Receipt printers

●Features

- 1) Six strobe partitions enable low current printing.
- 2) Simple structure with our clip connector reduces the size and weight.

●External dimensions (Units: mm)

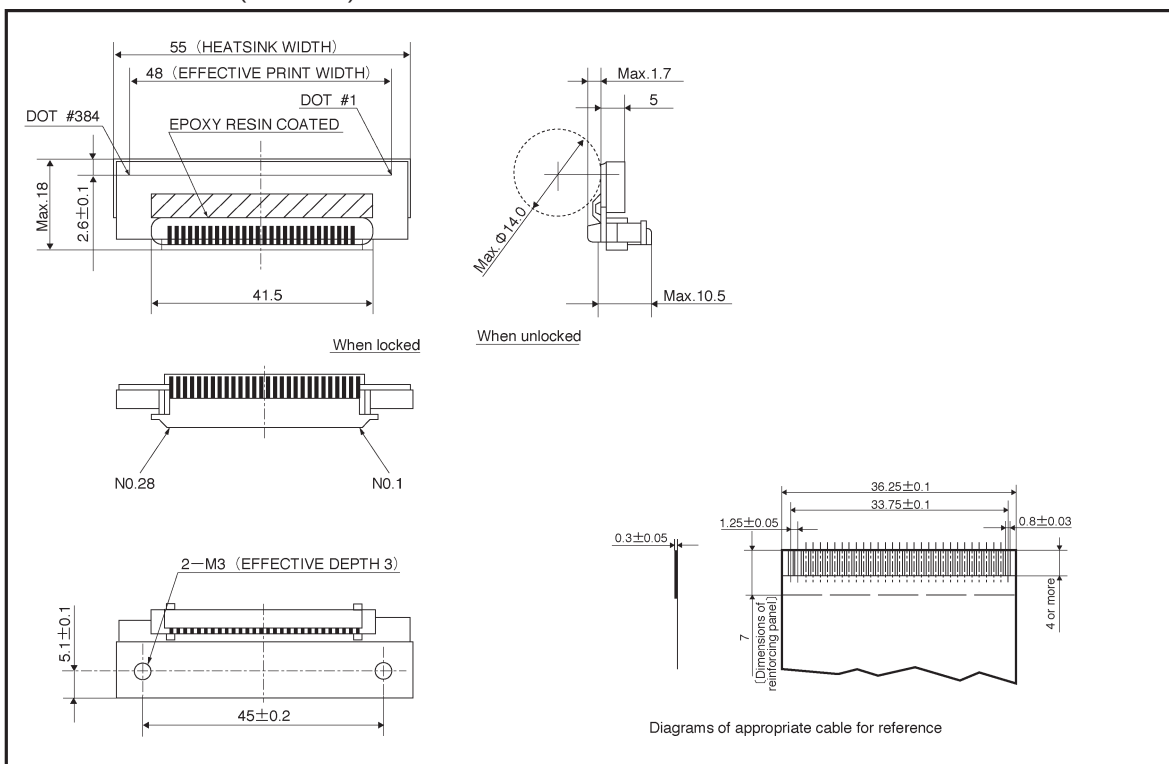

[illegible]

- Pin assignments

No.	Circuit
1	VH
2	VH
3	VH
4	DO
5	$\overline{\text{LAT}}$
6	CLK
7	V_{DD}
8	STB1
9	STB2
10	STB3
11	TM
12	TM
13	P-GND
14	P-GND

2

●Timing chart

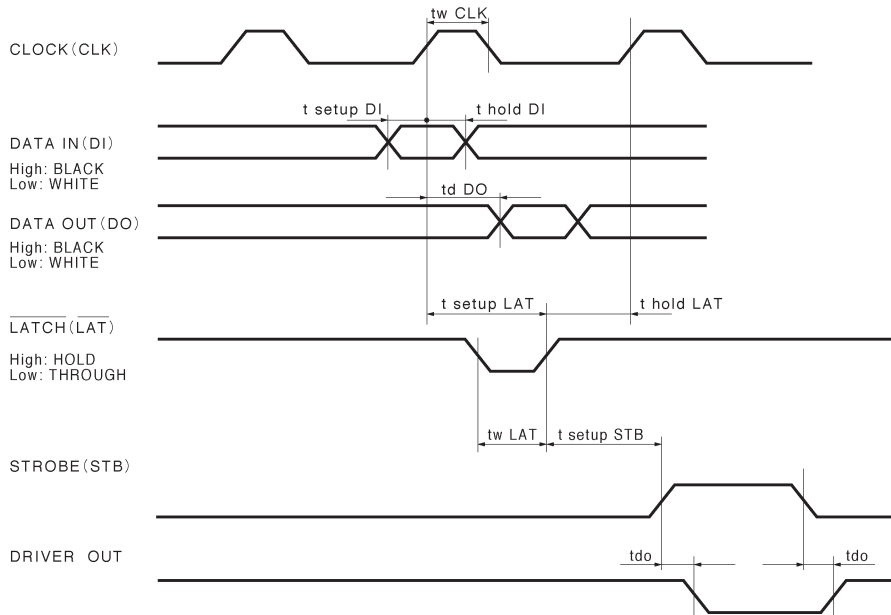


Fig. 2

●Characteristics

Parameter	Symbol	Typical	Unit
Effective printing width	—	48.0	mm
Dot pitch	—	0.125	mm
Total dot number	—	384	dots
Average resistance value	Rave	142	Ω
Applied voltage	V_H	4.2~8.5	V
Applied power	P_O	0.123	W / dot
Print cycle	SLT	5.0	ms
Pulse width	T_{ON}	2.53	ms
Maximum number of dots energized simultaneously	—	64	dots
Maximum clock frequency	—	8	MHz
Maximum roller diameter	—	$\phi 14.0$	mm
Running life / pulse life	—	50 / 5×10^7	km / pulses
Operating temperature	—	5~45	$^{\circ}\text{C}$

●Electrical characteristic curves

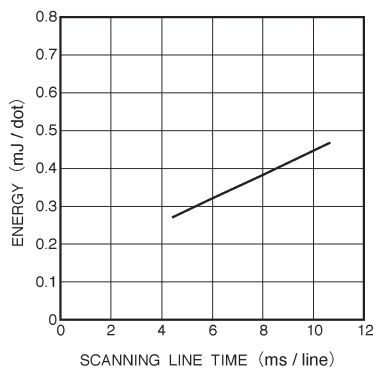


Fig. 3 Adaptive speed chart

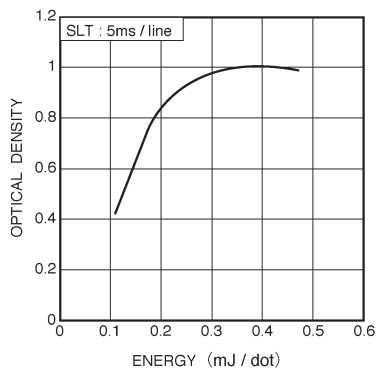


Fig. 4 Representative density curve

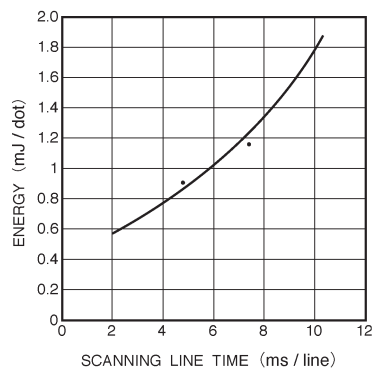


Fig. 5 Maximum energy curve

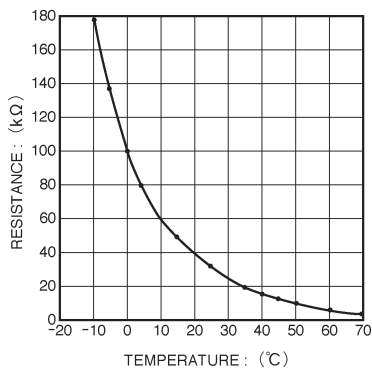


Fig. 6 Thermistor curve