

TOSHIBA GTR MODULE SILICON N CHANNEL IGBT


MG150J7KS50

HIGH POWER SWITCHING APPLICATIONS

MOTOR CONTROL APPLICATIONS

- The Electrodes are Isolated from Case.
- High Input Impedance
- 7 IGBTs Built into 1 Package.
- Enhancement-Mode
- High Speed Type IGBT : Inverter Stage
 - : $V_{CE(sat)} = 2.8V$ (Max.) (@ $I_C = 150A$)
 - : $t_f = 0.5\mu s$ (Max.) (@ $I_C = 150A$)
 - : $t_{rr} = 0.3\mu s$ (Max.) (@ $I_F = 150A$)
- Outline :
- Weight : 520g

EQUIVALENT CIRCUIT

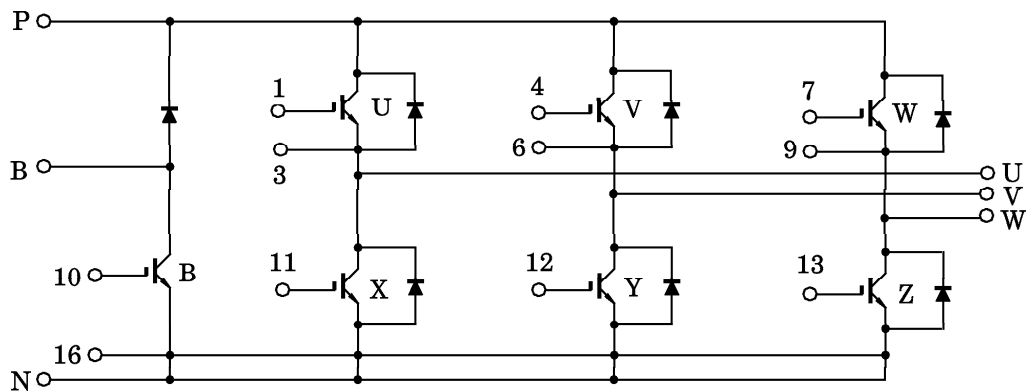

Signal Terminal

1 : G (U)	2 : Open	3 : E (U)	4 : G (V)
5 : Open	6 : E (V)	7 : G (W)	8 : Open
9 : E (W)	10 : G (B)	11 : G (X)	12 : G (Y)
13 : G (Z)	14 : Open	15 : Open	16 : E

961001FAA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

INVERTER STAGE

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Emitter Voltage		V_{CES}	600	V
Gate-Emitter Voltage		V_{GES}	± 20	V
Collector Current	DC	I_C	150	A
	1ms	I_{CP}	300	
Forward Current	DC	I_F	150	A
	1ms	I_{FM}	300	
Collector Power Dissipation (Tc = 25°C)		P_C	320	W
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-40~125	°C
Isolation Voltage		V_{Isol}	2500 (AC 1 min.)	V
Screw Torque (Terminal/Mounting)		—	3 / 3	N·m

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I_{GES}	$V_{GE} = \pm 20V, V_{CE} = 0V$	—	—	± 500	nA
Collector-Emitter Cut-Off Current		I_{CES}	$V_{CE} = 600V, V_{GE} = 0V$	—	—	1.0	mA
Gate-Emitter Cut-Off Voltage		$V_{GE} (off)$	$V_{CE} = 5V, I_C = 15mA$	5.0	—	8.0	V
Collector-Emitter Saturation Voltage		$V_{CE} (sat)$	$I_C = 150A, V_{GE} = 15V$	—	2.2	2.8	V
Input Capacitance		C_{ies}	$V_{CE} = 10V, V_{GE} = 0V, f = 1MHz$	—	12.0	—	nF
Forward Voltage		V_F	$I_F = 150A$	—	2.5	3.5	V
Switching Time	Rise Time	t_r	Inductive-Load $V_{CC} = 300V$ $I_C = 150A$ $V_{GE} = \pm 15V$ $R_G = 9.2\Omega$ (Note 1)	—	0.15	0.3	μs
	Turn-On Time	t_{on}		—	0.23	0.46	
	Fall Time	t_f		—	0.25	0.50	
	Turn-Off Time	t_{off}		—	0.50	1.00	
	Reverse Recovery Time	t_{rr}		—	0.15	0.30	
Thermal Resistance		$R_{th(j-c)}$	Transistor Stage	—	—	0.39	°C / W
			Diode Stage	—	—	1.00	
		$R_{th(c-f)}$	Case to fin (Note 2)	—	0.05	—	

(Note 2) Silicone Grease is applied.

BRAKE STAGE

MAXIMUM RATINGS (Ta = 25°C)


CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Emitter Voltage		V_{CES}	600	V
Gate-Emitter Voltage		V_{GES}	± 20	V
Collector Current	DC	I_C	50	A
	1ms	I_{CP}	100	
Forward Current	DC	I_F	50	A
	1ms	I_{FM}	100	
Collector Power Dissipation (Tc = 25°C)		P_C	120	W
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-40~125	°C
Isolation Voltage		V_{Isol}	2500 (AC 1 min.)	V
Screw Torque (Terminal/Mounting)		—	3 / 3	N·m

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I_{GES}	$V_{GE} = \pm 20V, V_{CE} = 0V$	—	—	± 500	nA
Collector-Emitter Cut-Off Current		I_{CES}	$V_{CE} = 600V, V_{GE} = 0V$	—	—	1.0	mA
Gate-Emitter Cut-Off Voltage		$V_{GE} (off)$	$V_{CE} = 5V, I_C = 5mA$	5.0	—	8.0	V
Collector-Emitter Saturation Voltage		$V_{CE} (sat)$	$I_C = 50A, V_{GE} = 15V$	—	2.0	2.5	V
Input Capacitance		C_{ies}	$V_{CE} = 10V, V_{GE} = 0V, f = 1MHz$	—	4.0	—	nF
Forward Voltage		V_F	$I_F = 50A$	—	2.2	2.8	V
Switching Time	Rise Time	t_r	Inductive-Load $V_{CC} = 300V$ $I_C = 50A$ $V_{GE} = \pm 15V$ $R_G = 24\Omega$ (Note 1)	—	0.08	0.16	μs
	Turn-On Time	t_{on}		—	0.10	0.20	
	Fall Time	t_f		—	0.22	0.44	
	Turn-Off Time	t_{off}		—	0.50	1.00	
	Reverse Recovery Time	t_{rr}		—	0.23	0.35	
Thermal Resistance		$R_{th(j-c)}$	Transistor Stage	—	—	1.04	°C / W
			Diode Stage	—	—	2.00	
		$R_{th(c-f)}$	Case to fin (Note 2)	—	0.05	—	

(Note 2) Silicone Grease is applied.

(Note 1) Switching Time Test Circuit & Timing Chart

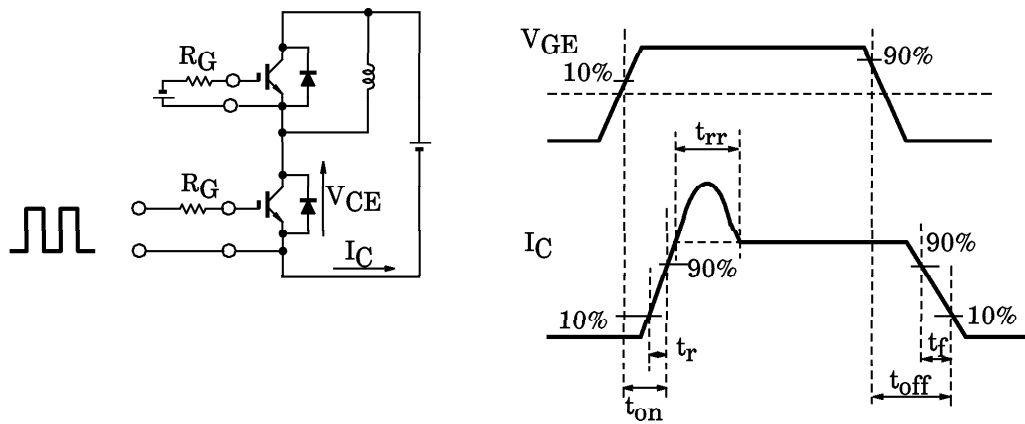

OUTLINE

(Unit in mm)

