

QUARTZ CRYSTAL OSCILLATOR

GENERAL DESCRIPTION

The NJU6392 series is a 3V operation C-MOS quartz crystal oscillator which consists of an oscillation amplifier and a 3-state output buffer.

This series is classed into four versions A, B, C and P according to their oscillation frequency range mentioned in the line-up table.

The oscillation amplifier incorporates feed-back resistance and oscillation capacitors(C_g , C_d), therefore, it requires no external component except quartz crystal.

Drivability of the 3-state output buffer is 8mA (sink/source), thus it can drive C-MOS load.


FEATURES

- Low Operating Voltage. — 2.4~3.6V
- Maximum Oscillation Frequency (See Line-Up Table)
- Low Operating Current
- High Fan-out — $I_{OL}/I_{OH}=8mA$
- 3-state Output Buffer
- Oscillation Capacitors C_g and C_d on-chip
- Oscillation Output Stand-by Function
- Package Outline — CHIP / EMP 8
- C-MOS Technology

LINE-UP TABLE

Type No.	Recommended Osc. Freq.	Output Freq.	C_g/C_d
NJU6392A	20~35MHz	f_o	27pF
6392B	30~50MHz		19pF
6392C	45~75MHz		12/14pF
6392P	~75MHz		No

BLOCK DIAGRAM

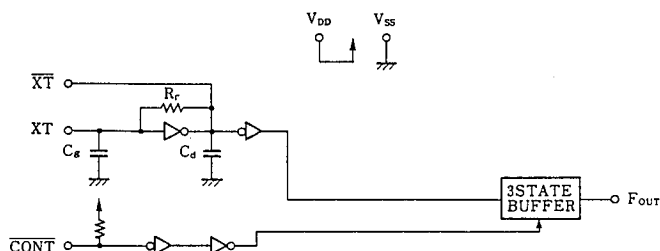

PACKAGE OUTLINE




NJU6392XC



NJU6392XE

PAD LOCATION/PIN CONFIGURATION



COORDINATES

Unit: μm

No.	PAD	X	Y
1	CONT	-408	248
2	XT	-408	81
3	XT	-408	-86
4	VSS	-408	-248
5	FOUT	464	-248
8	VDD	464	248

Chip Size : 1.29 X 0.8mm
Chip Center : $X=0\mu m, Y=0\mu m$
Chip Thickness : $400\mu m \pm 30\mu m$
(Note) No.6 and 7 terminals are only for package type information. There are no PAD on the chip.

TERMINAL DESCRIPTION

NO.	SYMBOL	F U N C T I O N
1	CONT	3-State Output Control
		CONT Output (F _{OUT})
		H or OPEN Output Frequency f _o
		L Output High Impedance
2	XT	Quartz Crystal Connecting Terminals
3	XT	
4	V _{SS}	GND
5	F _{OUT}	Output frequency f _o
8	V _{DD}	+ 3 V

ABSOLUTE MAXIMUM RATINGS

(T_a=25°C)

P A R A M E T E R	SYMBOL	R A T I N G S	UNIT
Supply Voltage	V _{DD}	-0.5 ~ +7.0	V
Input Voltage	V _{IN}	V _{SS} -0.5 ~ V _{DD} +0.5	V
Output Voltage	V _o	-0.5 ~ V _{DD} +0.5	V
Input Current	I _{IN}	±10	mA
Output Current	I _o	±25	mA
Power Dissipation	P _D	200 (EMP)	mW
Operating Temperature Range	Topr	-40 ~ +85	°C
Storage Temperature Range	Tstg	-55 ~ +125	°C

(Note) Decoupling capacitor should be connected between V_{DD}-V_{SS} due to the stabilized operation for the circuit.

ELECTRICAL CHARACTERISTICS

(T_a=25°C, V_{DD}=3V)

P A R A M E T E R	SYMBOL	C O N D I T I O N S	MIN	TYP	MAX	UNIT
Operating Voltage	V _{DD}		2.4		3.6	V
Operating Current	I _{DD1}	A Version f _{osc} =24MHz, No Load		6	15	mA
	I _{DD2}	B Version f _{osc} =48MHz, No Load		9	20	
	I _{DD3}	C Version f _{osc} =48MHz, No Load (Note 1)		9	25	
Stand-by Current	I _{st}	CONT, XT=V _{SS} , No Load (Note 2)			1	μA
Input Voltage	V _{IH}		2.4		3.0	V
	V _{IL}		0		0.6	
Output Current	I _{OH}	V _{OH} =2.7V	8			mA
	I _{OL}	V _{OL} =0.3V	8			
Input Current	I _{IN}	CONT Terminal, CONT=V _{SS}	75	150	300	μA
3-St Off-leakage Current	I _{oz}	CONT=V _{SS} , F _{OUT} =V _{SS} or V _{DD}			±0.1	μA
Internal Capacitor (Note 3)	C _g /C _d	A Version f _{osc} =24MHz, No Load		27		pF
		B Version f _{osc} =48MHz, No Load		19		
		C Version f _{osc} =48MHz, No Load		12/14		
Max. Oscillation Freq.	f _{MAX}	A Version	35			MHz
		B Version	50			
		C/P Version (Note 1)	75			
Output Signal Symmetry	SYM	C _L =15pF at 1.5V	45	50	55	%
		C _L =30pF at 1.5V				
Output Signal Rise Time	t _{r1}	C _L =15pF, 10~90%		2	4	ns
	t _{r2}	C _L =30pF, 10~90%			6	
Output Signal Fall Time	t _{f1}	C _L =15pF, 90~10%		2	4	ns
	t _{f2}	C _L =30pF, 90~10%			6	



(Note 1) Only P Version is measured with external capacitors contained 3pF for C_g and 3pF for C_d.

(Note 2) Excluding input current on CONT terminal.

(Note 3) P Version is not mentioned due to internal oscillation capacitors C_g and C_d separated.



MEASUREMENT CIRCUITS

(1) Output Signal Symmetry

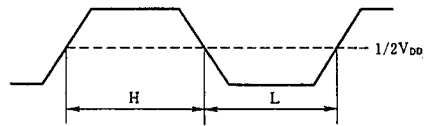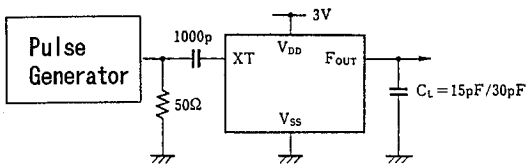

4

(2) Output Signal Rise / Fall Time

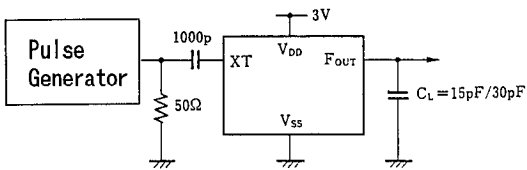

NJU6392 Series

MEMO

[CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.