

OKI electronic components

OCM2□4, 2□5 SERIES

Low Output-capacitance Type Optical MOS Relay For AC/DC Load

GENERAL DESCRIPTION

The OCM2□4 and OCM2□5 Series are optical MOS relays for AC/DC load that provide high-speed response and are capable of handling high-frequency signals. The input portion is an infrared light emitting diode. The output portion uses a combination of low-capacitance VD-MOS (Vertical Diffusion MOS) FETs and photodiode arrays. The device is encased in an extremely small 6-pin plastic DIP or SMD-type (gull-wing) package.

The optical MOS relay switch may be used in applications that currently use mechanical relay switches, but offers smaller size, noise-free switching, and electronic circuit compatibility because of its non-mechanical operation. Optical MOS relay switches also dissipate less power than equivalent bipolar devices at lower switching frequencies.

FEATURES

- Infinitesimally small control voltage
- Excellent high-frequency characteristics (>30 dB isolation at 10 MHz)
- High-speed switching response of 200 μs or less
- Low leakage current
- No chattering or switch bounces
- No mechanical switching noises
- Small size and easy mounting (6-pin plastic DIP or SMD-type[gull-wing] package)


APPLICATIONS

- Measurement equipment
- Audio-visual equipment
- Home electronics
- Automatic meter reading equipment
- Other applications requiring small size or high performance
- Other applications requiring non-contact switches


PIN CONFIGURATION

(Unit: mm)


• DIP Type

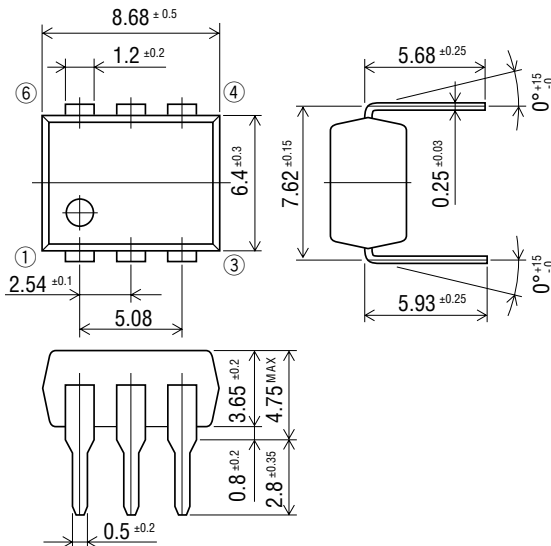


• SMD Type (gull-wing)

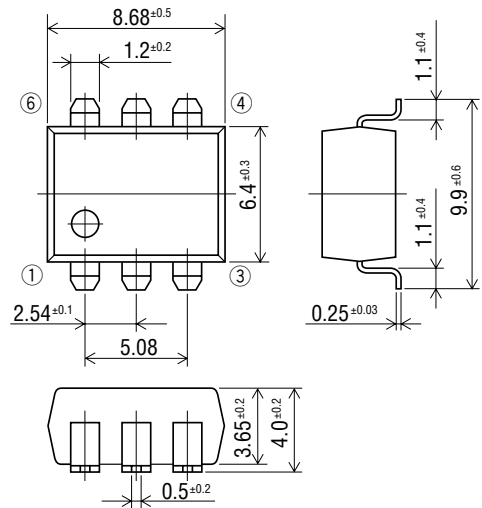


• Through hole (Bottom view)



• Mounting pad (Top view)



• Pin Connection Diagram



- | | |
|------------|-----------|
| 1: Anode | (LED) |
| 2: Cathode | (LED) |
| 3: NC | |
| 4: Drain | (MOS FET) |
| 5: Source | (MOS FET) |
| 6: Drain | (MOS FET) |

ABSOLUTE MAXIMUM RATINGS

(Ambient temperature Ta=25°C)

Product Name					OCM204	OCM214	OCM224	OCM244
Parameter					OCM205	OCM215	OCM225	OCM245
Input Characteristics	Continuous Forward Current	I_F		mA	50			
	Derating Factor of Continuous Forward Current	ΔI_F		mA/°C	Refer to [Derating Factor of Continuous Forward Current] of characteristics data			
	Peak Forward Current	I_{FM}	Pulse width 100 μ s Cycle 10 ms	A	0.5			
	Reverse Voltage	V_R		V	5			
	Power Dissipation	P_{DL}		mW	75			
Output Characteristics	Load Voltage	V_{OFF}		V	60	100	200	400
	Load Current	I_{ON}		mA	80	50	40	15
	Derating Factor of Load Current	ΔI_{ON}		mA/°C	Refer to [Derating Factor of Load Current] of characteristics data			
	Surge Load Current	I_{SUG}	Pulse width 1 ms 1shot	A	0.1		0.07	0.025
	Power Dissipation	P_D		mW	300			
Total Power Dissipation					P_{tot}			
Isolation Voltage					1500			
					OCM204	OCM214	OCM224	OCM244
					4000			
					OCM205	OCM215	OCM225	OCM245
Operating Temperature					T_{opr}			
Storage Temperature					T_{stg}			

ELECTRICAL CHARACTERISTICS


(Ambient temperature Ta=25°C)

Product Name						OCM204	OCM214	OCM224	OCM244
Parameter		Symbol	Condition		Unit	OCM205	OCM215	OCM225	OCM245
Input Characteristics	Forward Voltage	V_F	$I_F=10\text{ mA}$	Min.	V	1.0			
				Max.		1.3			
	Reverse Voltage	I_R	$V_R=5\text{ V}$	Max.	μA	10			
	Operation Input Current *1	I_{FA}	$I_{ON}=100\text{ mA}$	Max.	mA	5			
Output Characteristics	Recovery Input Current	I_{FR}	$V_{OFF}=\text{Rating}$ $I_{ON}=100\text{ mA}$	Min.	mA	0.2			
	On-resistance	R_{ON}	$I_F=10\text{ mA}$ $I_{ON}=\text{Rating}$ Time to flow current is within one second	Min.	Ω	20	40	100	300
				Typ.		30	65	150	600
				Max.		40	90	200	900
	Off-state Leakage Current *2	I_{OFF}	$V_{OFF}=\text{Rating}$	Max.	nA	1.0			
Coupling Characteristics	Output Terminal Capacitance	C_{OUT}	$V_{OFF}=50\text{ V}$ $f=1\text{ MHz}$	Typ.	pF	7			
	Input-to-output Capacitance	C_{IO}	$f=1\text{ MHz}$	Typ.	pF	1.3			
	Turn-on Time	t_{ON}	$I_F=10\text{ mA}$ $I_{ON}=\text{Rating}$	Typ.	μs	30			
				Max.		200			
	Turn-off Time	t_{OFF}	OCM204, 205: 10mA OCM214, 215: 10mA OCM224, 225: 4mA OCM244, 245: 1mA	Typ.	μs	60			
				Max.		200			


*1 : Can correspond to special specification $I_{FA} < 3.0\text{ mA}$ *2 : Can correspond to special specification $I_{FA} < 0.1\text{ nA}$

TYPICAL CHARACTERISTICS


- Derating Factor of Continuous Forward Current

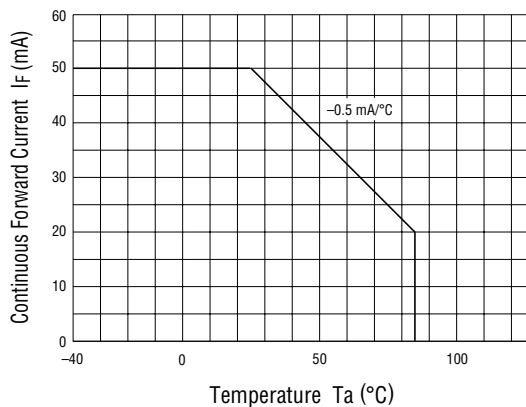


- Derating Factor of Continuous Load Current

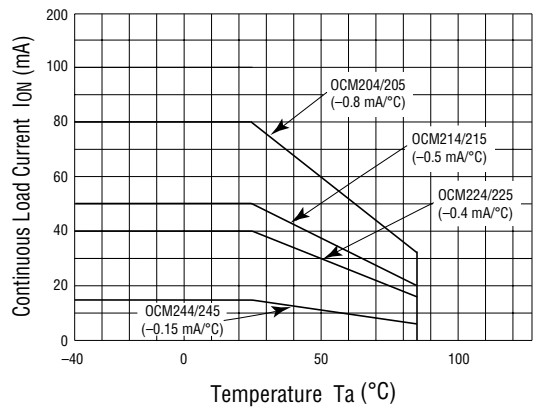


- Operation Input Current vs. Ambient Temperature

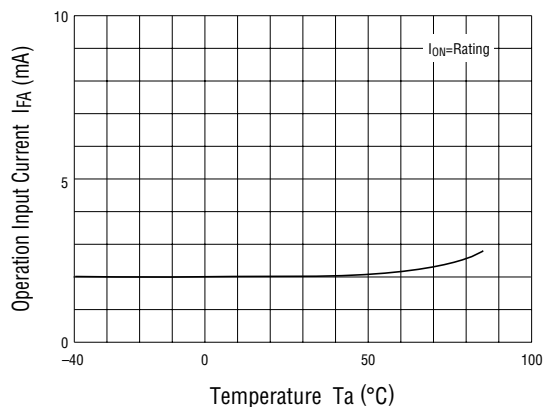


- Recovery Input Current vs. Ambient Temperature

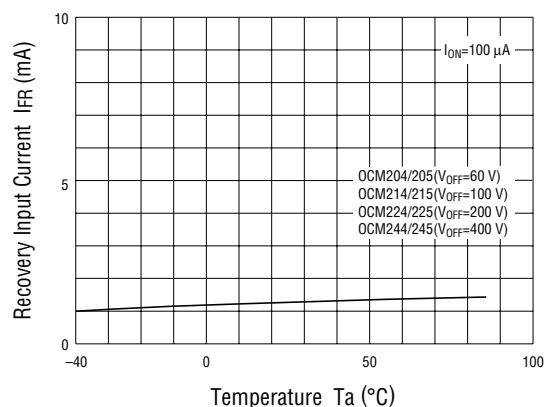


- On-resistance vs. Ambient Temperature 1

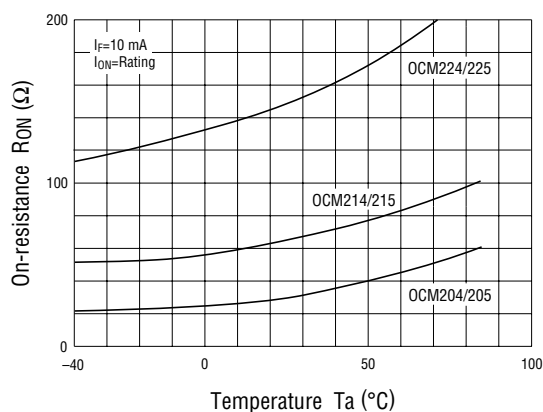


- On-resistance vs. Ambient Temperature 2

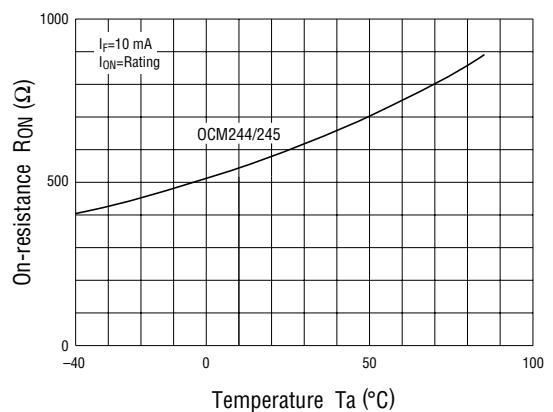


- Turn-on/Turn-off Time vs. Ambient Temperature

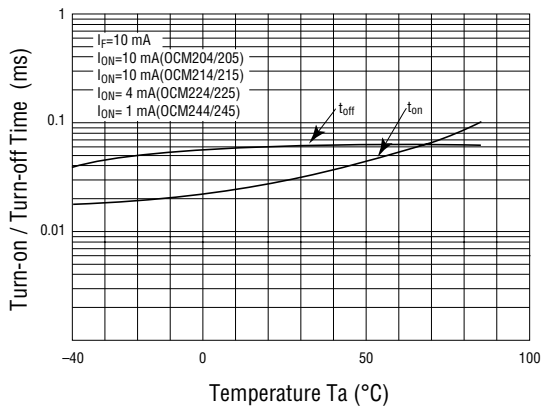


- Off-state Leakage Current vs. Ambient Temperature

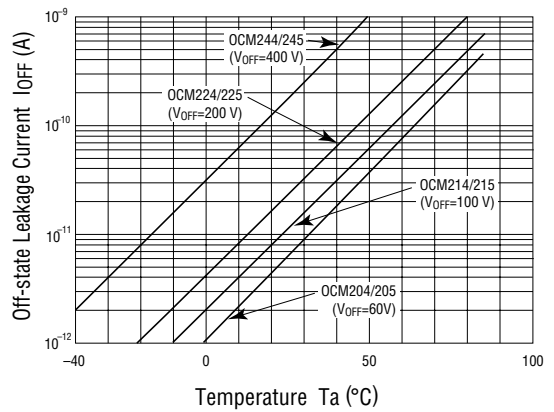


- Continuous Foward Current vs. On-resistance 1

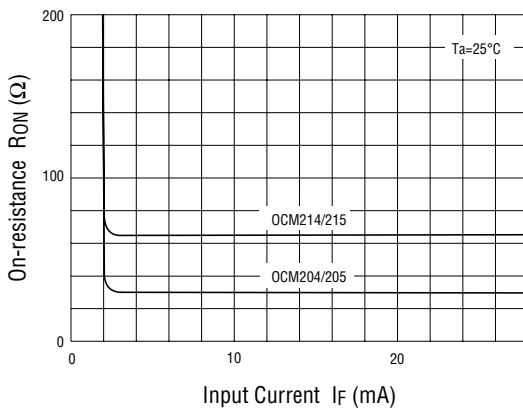


- Continuous Foward Current vs. On-resistance 2

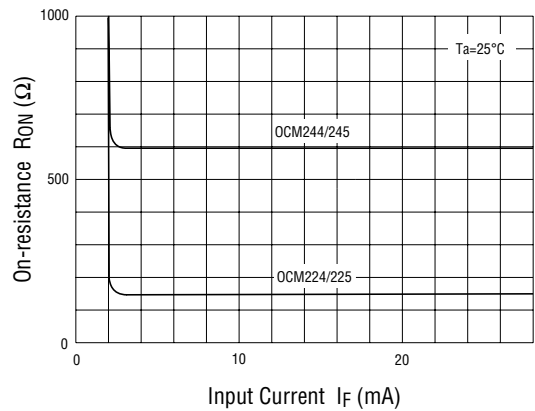


- Continuous Foward Current vs. Turn-on/Turn-off Time

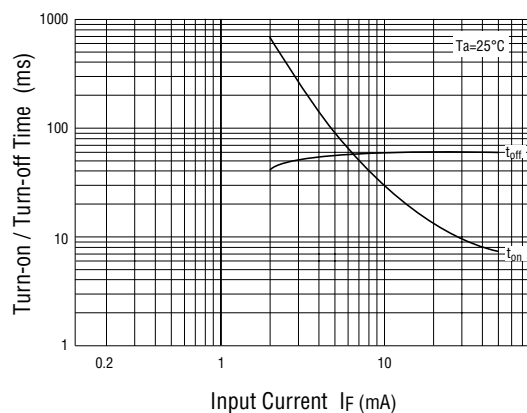


- Output Terminal Capacitance vs. Applied Voltage

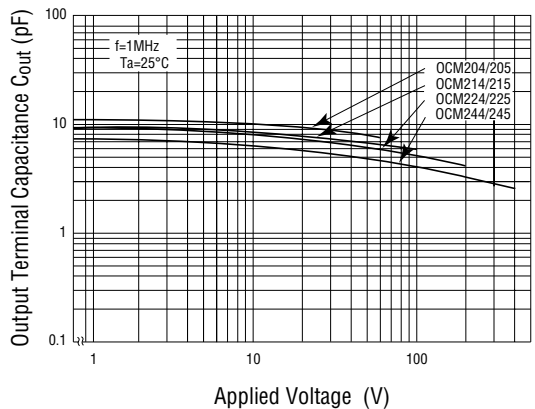

• Isolation

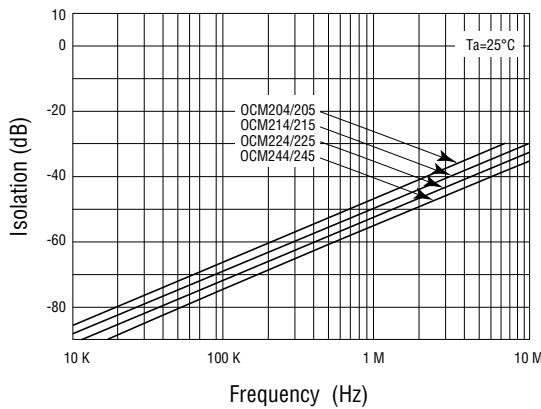

• Insertion Loss

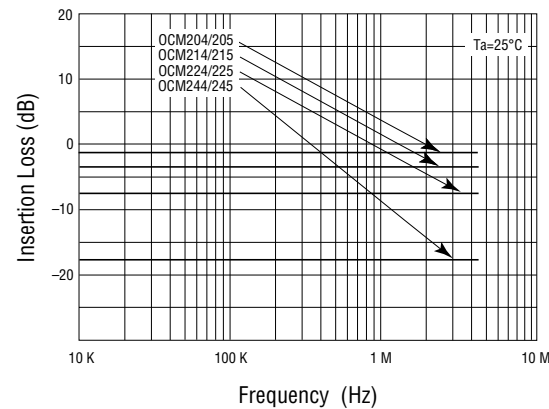

• Load Current vs. Voltage

