

XC74UL14AA



CMOS Logic

- ◆CMOS Schmitt Trigger Inverter
- ◆High Speed Operation : tpd=2.3ns TYP
- ◆Operating Voltage Range : 2V~5.5V
- ◆Low Power Consumption : 1μA (max)

■General Description


The XC74UL14AA is a CMOS Schmitt Trigger Inverter, manufactured using silicon gate CMOS fabrication.

CMOS low power circuit operation makes high speed LS-TTL operations achievable.

With a wave forming buffer connected internally, stabilized output can be achieved as the circuit offers high noise immunity.

As the XC74UL14AA is integrated into mini molded, SSOT-25 and SOT-25 packages, high density mounting is possible.

■Pin Configuration

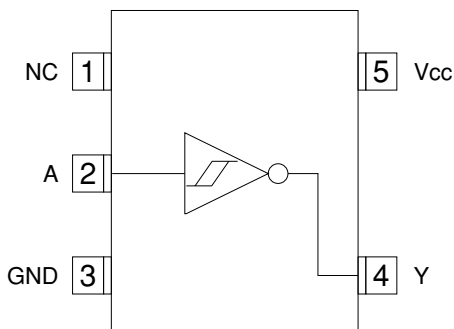

SSOT-25/SOT-25
(TOP VIEW)

■Applications

- Palmtops
- Digital Equipment

■Features

High Speed Operation : tpd=2.3ns TYP

Operating Voltage Range: 2V~5.5V

Low Power Consumption: 1μA (max)

Ultra Small Package : SSOT-25 and SOT-25

■Function

INPUT	OUTPUT
A	Y
H	L
L	H

H=High level, L=Low level

■Absolute Maximum Ratings

Ta=-40°C~85°C

PARAMETER	SYMBOL	RATINGS	UNITS
Power Supply Voltage	VCC	-0.5 ~ +6.0	V
Input Voltage	VIN	-0.5 ~ +6.0	V
Output Voltage	VOUT	-0.5 ~ VCC +0.5	V
Input Diode Current	I _{IK}	-20	mA
Output Diode Current	I _{OK}	±20	mA
Output Current	I _{OUT}	±25	mA
VCC ,GND Current	I _{CC} ,I _{GND}	±50	mA
Continuous Total Power Dissipation (Ta=55°C)	P _d	150	mW
Storage Temperature	T _{stg}	-65 ~ +150	°C

Note: Voltage is all Ground standardized.

Recommended Operating Conditions

PARAMETER	SYMBOL	V _{CC} (V)	CONDITIONS	UNITS
Supply Voltage	V _{CC}	-	2 ~ 5.5	V
Input Voltage	V _{IN}	-	0 ~ 5.5	V
Output Voltage	V _{OUT}	-	0 ~ V _{CC}	V
Operating Temperature	T _{opr}	-	-40 ~ +85	°C
Output Current	I _{OH}	3.0	-4	mA
		4.5	-8	
	I _{OL}	3.0	4	
		4.5	8	

DC Electrical Characteristics


PARAMETER	SYMBOL	V _{CC} (V)	CONDITIONS	T _a =25°C			T _a =-40~85°C		UNITS		
				MIN	TYP	MAX	MIN	MAX			
Threshold Voltage	V _{T+}	3.0		-	-	2.2	-	2.2	V		
		4.5		-	-	3.15	-	3.15			
		5.5		-	-	3.85	-	3.85			
	V _{T-}	3.0		0.9	-	-	0.9	-	V		
		4.5		1.35	-	-	1.35	-			
		5.5		1.65	-	-	1.65	-			
Hysteresis Voltage	V _H	3.0	0.25	-	1.2	0.25	1.2				
		4.5	0.30	-	1.4	0.30	1.4				
		5.5	0.35	-	1.6	0.35	1.6				
Output Voltage	V _{OH}	2.0	V _{IN} =V _{IL}	I _{OH} =-50μA	1.9	2.0	-	1.9	-	V	
		3.0			2.9	3.0	-	2.9	-		
		4.5		4.4	4.5	-	4.4	-			
		3.0		I _{OH} =-4mA	2.58	-	-	2.48	-		
		4.5		I _{OH} =-8mA	3.94	-	-	3.80	-		
	V _{OL}	V _{IN} =V _{IH}	2.0	I _{OL} =50μA	-	-	0.1	-	0.1	V	
			3.0		-	-	0.1	-	0.1		
			4.5		-	-	0.1	-	0.1		
			3.0		I _{OL} =4mA	-	-	0.36	-		0.44
			4.5		I _{OL} =8mA	-	-	0.36	-		0.44
Input Current	I _{IN}	5.5	V _{IN} =V _{CC} or GND	-0.1	-	0.1	-1.0	1.0	μA		
Quiescent Supply Current	I _{CC}	5.5	V _{IN} =V _{CC} or GND, I _{OUT} =0μA	-	-	1.0	-	10.0			

Switching Electrical Characteristics


PARAMETER	SYMBOL	C _L	V _{CC} (V)	CONDITIONS	T _a =25°C			T _a =-40~85°C		UNITS
					MIN	TYP	MAX	MIN	MAX	
Propagation Delay Time	t _{PLH}	15pF	3.3		-	2.8	12.8	1.0	15	ns
					-	2.1	8.6	1.0	10	
		50pF	3.3		-	4.3	16.3	1.0	18.5	ns
			5.0		-	3.1	10.6	1.0	12	
	t _{PHL}	15pF	3.3		-	3.1	12.8	1.0	15	ns
					-	2.5	8.6	1.0	10	
50pF		3.3	-	4.4	16.3	1.0	18.5	ns		
			-	3.4	10.6	1.0	12			
Input Capacitance	C _{IN}	-	5.0	V _{IN} =V _{CC} or GND	-	2	10	-	10	pF
Power Dissipation Capacitance	C _{pd}	No Load, f=1MHz			-	10	-	-	-	pF

tr=tf=3ns

Waveforms

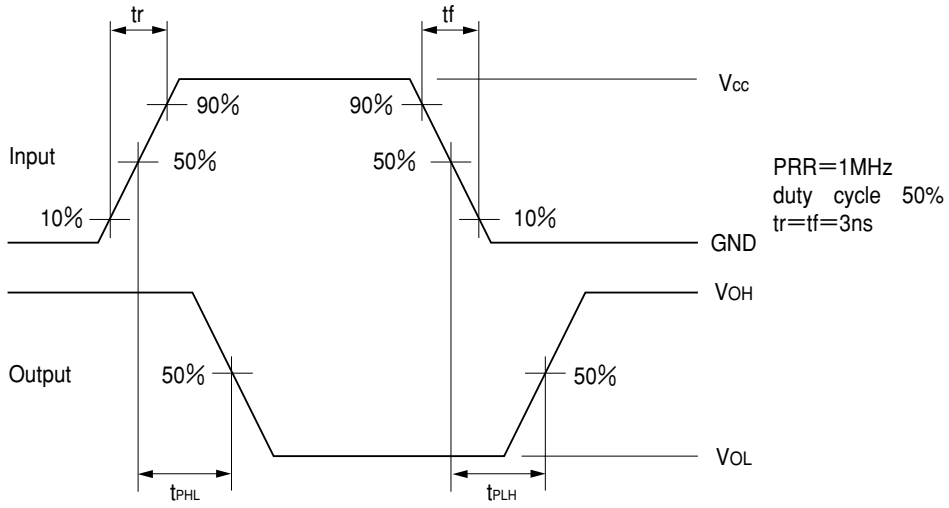

Typical Application Circuit

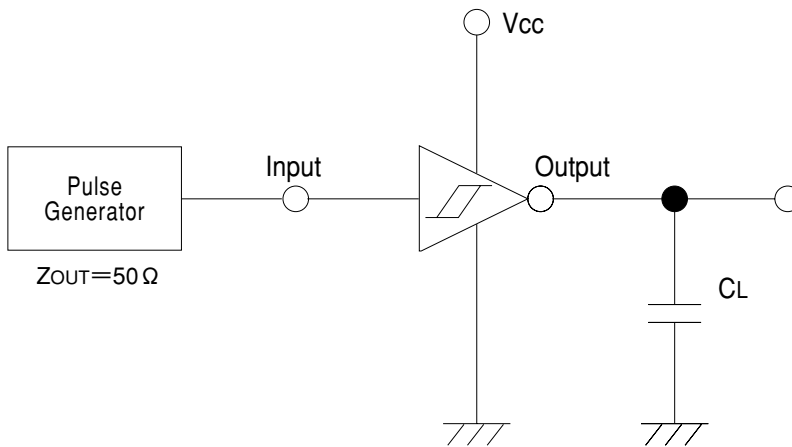

Note: Open output when measuring supply current