

XC74ULU04A

 TOREX

CMOS Logic

- ◆ CMOS Inverter
- ◆ Unbuffered Type
- ◆ High Speed Operation : tpd=2.3ns TYP
- ◆ Operating Voltage Range : 2V~5.5V
- ◆ Low Power Consumption : 1 μ A (max)

General Description


The XC74ULU04A is a CMOS Inverter, manufactured using silicon gate CMOS fabrication.

CMOS low power circuit operation makes high speed LS-TTL operations achievable.

The internal circuit is composed of a single stage inverter, so can be used in the crystal oscillator.

As the XC74ULU04A is integrated into mini molded, SSOT-25 and SOT-25 packages, high density mounting is possible.

Pin Configuration

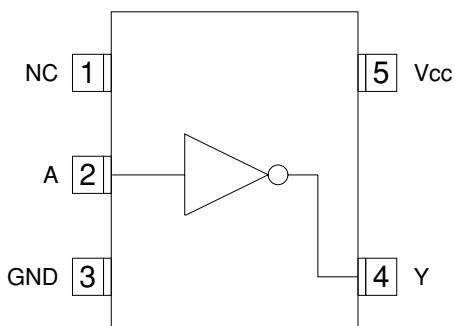

SSOT-25/SOT-25
(TOP VIEW)

Applications

- Crystal Oscillators
- Palmtops
- Digital Equipment

Features

- High Speed Operation : tpd=2.3ns TYP
Operating Voltage Range: 2V~5.5V
Low Power Consumption: 1 μ A (max)
Ultra Small Package : SSOT-25 and SOT-25

Function

INPUT	OUTPUT
A	Y
H	L
L	H

H=High level, L=Low level

Absolute Maximum Ratings

Ta=-40°C~85°C

PARAMETER	SYMBOL	RATINGS	UNITS
Power Supply Voltage	Vcc	-0.5 ~ +6.0	V
Input Voltage	Vin	-0.5 ~ +6.0	V
Output Voltage	Vout	-0.5 ~ Vcc +0.5	V
Input Diode Current	Iik	-20	mA
Output Diode Current	lok	\pm 20	mA
Output Current	Iout	\pm 25	mA
Vcc ,GND Current	ICC, Ignd	\pm 50	mA
Continuous Total Power Dissipation (Ta=55°C)	Pd	150	mW
Storage Temperature	Tstg	-65 ~ +150	°C

Note: Voltage is all Ground standardized.

■ Recommended Operating Conditions

PARAMETER	SYMBOL	Vcc(V)	CONDITIONS					UNITS	
Supply Voltage	VCC	-	2 ~ 5.5					V	
Input Voltage	VIN	-	0 ~ 5.5					V	
Output Voltage	VOUT	-	0 ~ VCC					V	
Operating Temperature	Topr	-	-40 ~ +85					°C	
Output Current	IOH	3.0	-4					mA	
		4.5	-8						
	IOL	3.0	4						
		4.5	8						
Input Rise and Fall Time	tr, tf	3.3	0 ~ 100					ns	
		5.0	0 ~ 20						


■ DC Electrical Characteristics

PARAMETER	SYMBOL	Vcc(V)	CONDITIONS	Ta=25°C		Ta=-40~85°C		UNITS	
				MIN	TYP	MAX	MIN		
Input Voltage	VIH	2.0	VIN=VIL	1.7	-	-	1.7	-	V
		3.0		2.4	-	-	2.4	-	
		5.5		4.4	-	-	4.4	-	
	VIL	2.0		-	-	0.3	-	0.3	V
		3.0		-	-	0.6	-	0.6	
		5.5		-	-	1.1	-	1.1	
Output Voltage	VOH	2.0	IOH=-50μA	1.8	2.0	-	1.8	-	V
		3.0		2.7	3.0	-	2.7	-	
		4.5		4.0	4.5	-	4.0	-	
		3.0	IOH=-4mA	2.58	-	-	2.48	-	
		4.5		3.94	-	-	3.80	-	
	VOL	2.0	IOL=50μA	-	-	0.2	-	0.2	V
		3.0		-	-	0.3	-	0.3	
		4.5		-	-	0.5	-	0.5	
		3.0	IOL=4mA	-	-	0.36	-	0.44	
		4.5		-	-	0.36	-	0.44	
Input Current	IIN	5.5	VIN=VCC or GND	-0.1	-	0.1	-1.0	1.0	μA
Quiescent Supply Current	Icc	5.5	VIN=VCC or GND, IOUT=0μA	-	-	1.0	-	10.0	


■ Switching Electrical Characteristics

PARAMETER	SYMBOL	CL	Vcc(V)	CONDITIONS	Ta=25°C		Ta=-40~85°C		UNITS	
					MIN	TYP	MAX	MIN		
Propagation Delay Time	tPLH	15pF	3.3		-	2.8	8.9	1.0	10.5	ns
		5.0			-	2.4	5.5	1.0	6.5	
		50pF	3.3		-	4.5	11.4	1.0	13	
		5.0			-	3.6	7	1.0	8	
	tPHL	15pF	3.3		-	2.7	8.9	1.0	10.5	
		5.0			-	2.2	5.5	1.0	6.5	
		50pF	3.3		-	4.2	11.4	1.0	13	
		5.0			-	3.5	7	1.0	8	
Input Capacitance	Cin	-	5.0	VIN=VCC or GND	-	2	10	-	10	pF
Power Dissipation Capacitance	Cpd	No Load, f=1MHz			-	16	-	-	-	pF

■ Waveforms

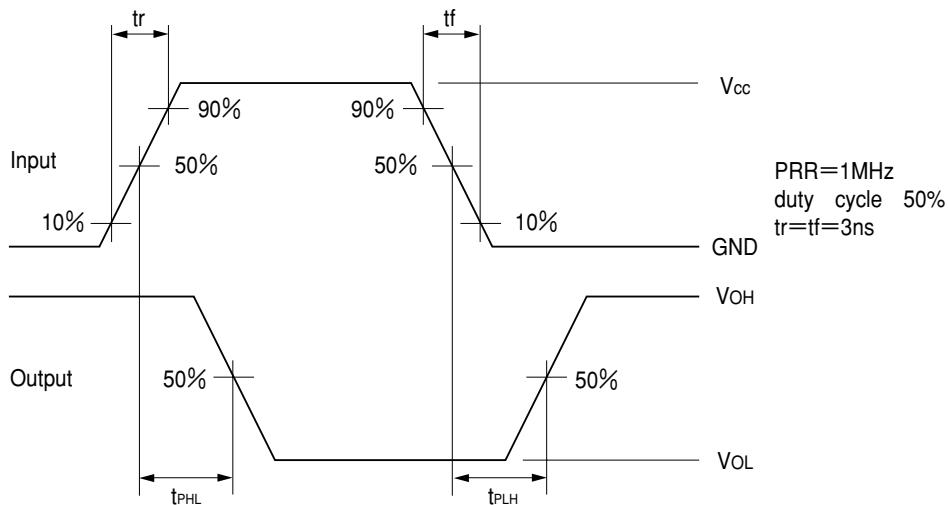

■ Typical Application Circuit

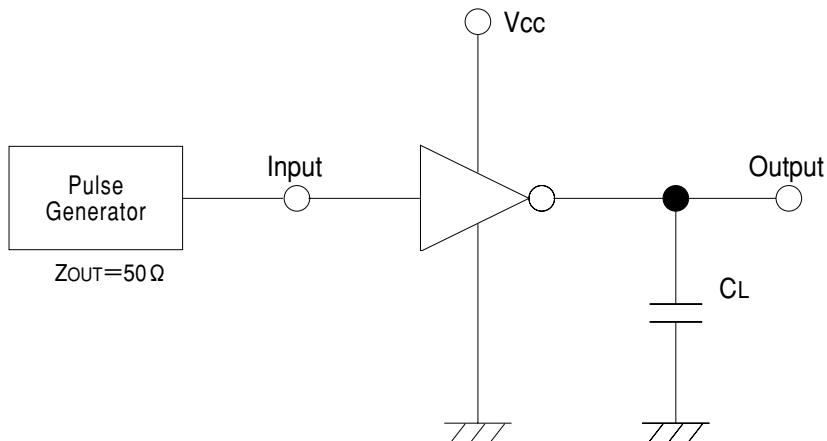

Note: Open output when measuring supply current