

- Organization . . . 4194304 × 32
- Single 5-V Power Supply ($\pm 10\%$ Tolerance)
- 72-Pin Single-In-Line Memory Module (SIMM) for Use With Sockets
- Utilizes Eight 16-Megabit DRAMs in Plastic Small-Outline J-Lead (SOJ) Packages
- Long Refresh Period
32 ms (2048 Cycles)
- All Inputs, Outputs, Clocks Fully TTL Compatible
- 3-State Output
- Common $\overline{\text{CAS}}$ Control for Eight Common Data-In and Data-Out Lines in Four Blocks
- Enhanced Page Mode Operation With $\overline{\text{CAS}}$ -Before- $\overline{\text{RAS}}$ (CBR), $\overline{\text{RAS}}$ -Only, and Hidden Refresh

- Presence Detect
- Performance Ranges:

	ACCESS TIME t_{RAC} (MAX)	ACCESS TIME t_{AA} (MAX)	ACCESS TIME t_{CAC} (MAX)	READ OR WRITE CYCLE (MIN)
'497BBK32-60	60 ns	30 ns	15 ns	110 ns
'497BBK32-70	70 ns	35 ns	18 ns	130 ns
'497BBK32-80	80 ns	40 ns	20 ns	150 ns

- Low Power Dissipation
- Operating Free-Air-Temperature Range
0°C to 70°C
- Gold-Tabbed Version Available:[†]
TM497BBK32
- Tin-Lead (Solder) Tabbed Version
Available: TM497BBK32S

description

The TM497BBK32 is a 16M-byte dynamic random-access memory (DRAM) organized as four times 4194304 × 8 in a 72-pin leadless single-in-line memory module (SIMM). The SIMM is composed of eight TMS417400DJ, 4194304 × 4-bit DRAMs, each in 24/26-lead plastic small-outline J-lead (SOJ) packages mounted on a substrate with decoupling capacitors. The TMS417400DJ is described in the TMS417400 data sheet.

The TM497BBK32 SIMM is available in the single-sided BK leadless module for use with sockets. The TM497BBK32 SIMM features $\overline{\text{RAS}}$ access times of 60 ns, 70 ns, and 80 ns. This device is characterized for operation from 0°C to 70°C.

operation

The TM497BBK32 operates as eight TMS417400DJs connected as shown in the functional block diagram and Table 1. The common I/O feature dictates the use of early write cycles to prevent contention on D and Q.

refresh

The refresh period is extended to 32 ms and, during this period, each of the 2048 rows must be strobed with $\overline{\text{RAS}}$ in order to retain data. $\overline{\text{CAS}}$ can remain high during the refresh sequence to conserve power.


power up

To achieve proper operation, an initial pause of 200 μs followed by a minimum of eight initialization cycles is required after full V_{CC} level is achieved. These eight initialization cycles need to include at least one refresh ($\overline{\text{RAS}}$ -only or CBR) cycle.

[†] Part numbers in this data sheet are for the gold-tabbed version; the information applies to both gold-tabbed and solder-tabbed versions.

TM497BBK32, TM497BBK32S
4194304 BY 32-BIT
DYNAMIC RAM MODULE
SMMS433B – JANUARY 1993 – REVISED JUNE 1995

BK SINGLE-IN-LINE PACKAGE
(TOP VIEW)

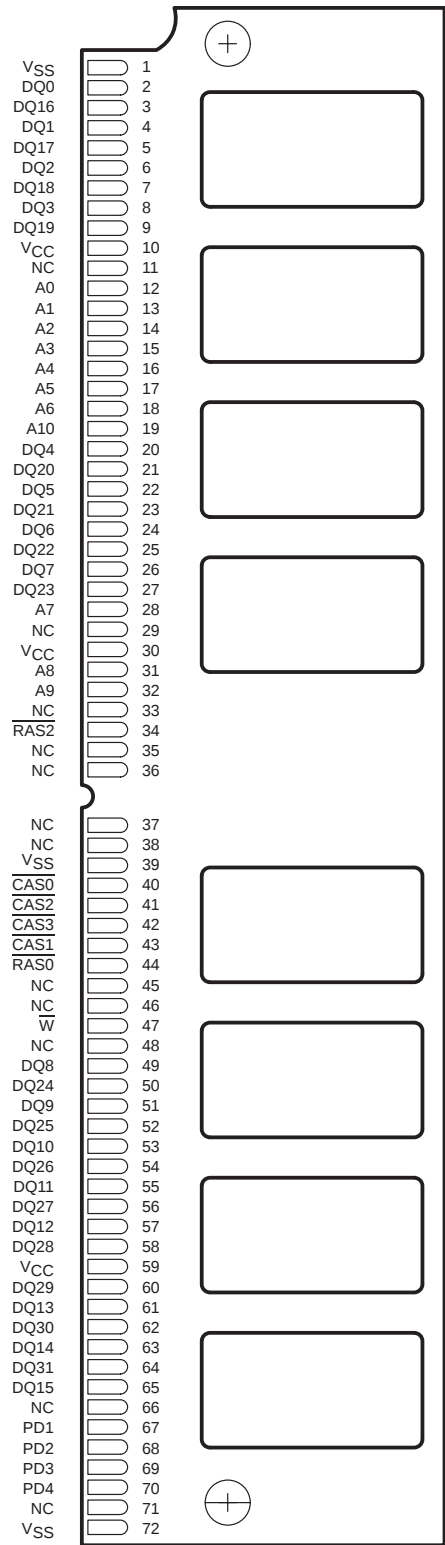

(SIDE VIEW)



PIN NOMENCLATURE	
A0–A10	Address Inputs
CAS0–CAS3	Column-Address Strobe
DQ0–DQ31	Data In/Data Out
NC	No Connection
PD1–PD4	Presence Detects
RAS0, RAS2	Row-Address Strobe
VCC	5-V Supply
VSS	Ground
W	Write Enable

PRESENCE DETECT					
SIGNAL (PIN)		PD1 (67)	PD2 (68)	PD3 (69)	PD4 (70)
TM497BBK32	80 ns	VSS	NC	NC	VSS
	70 ns	VSS	NC	VSS	NC
	60 ns	VSS	NC	NC	NC

Table 1. Connection Table

DATA BLOCK	$\overline{\text{RAS}}_x$	$\overline{\text{CAS}}_x$
DQ0–DQ7	$\overline{\text{RAS}}_0$	$\overline{\text{CAS}}_0$
DQ8–DQ15	$\overline{\text{RAS}}_0$	$\overline{\text{CAS}}_1$
DQ16–DQ23	$\overline{\text{RAS}}_2$	$\overline{\text{CAS}}_2$
DQ24–DQ31	$\overline{\text{RAS}}_2$	$\overline{\text{CAS}}_3$

single-in-line memory module and components

PC substrate: $1,27 \pm 0,1$ mm (0.05 inch) nominal thickness; 0.005 inch/inch maximum warpage

Bypass capacitors: Multilayer ceramic


Contact area for TM497BBK32: Nickel plate and gold plate over copper

Contact area for TM497BBK32S: Nickel plate and tin-lead over copper

TM497BKB32, TM497BKB32S
4194304 BY 32-BIT
DYNAMIC RAM MODULE

SMMS433B - JANUARY 1993 - REVISED JUNE 1995

functional block diagram

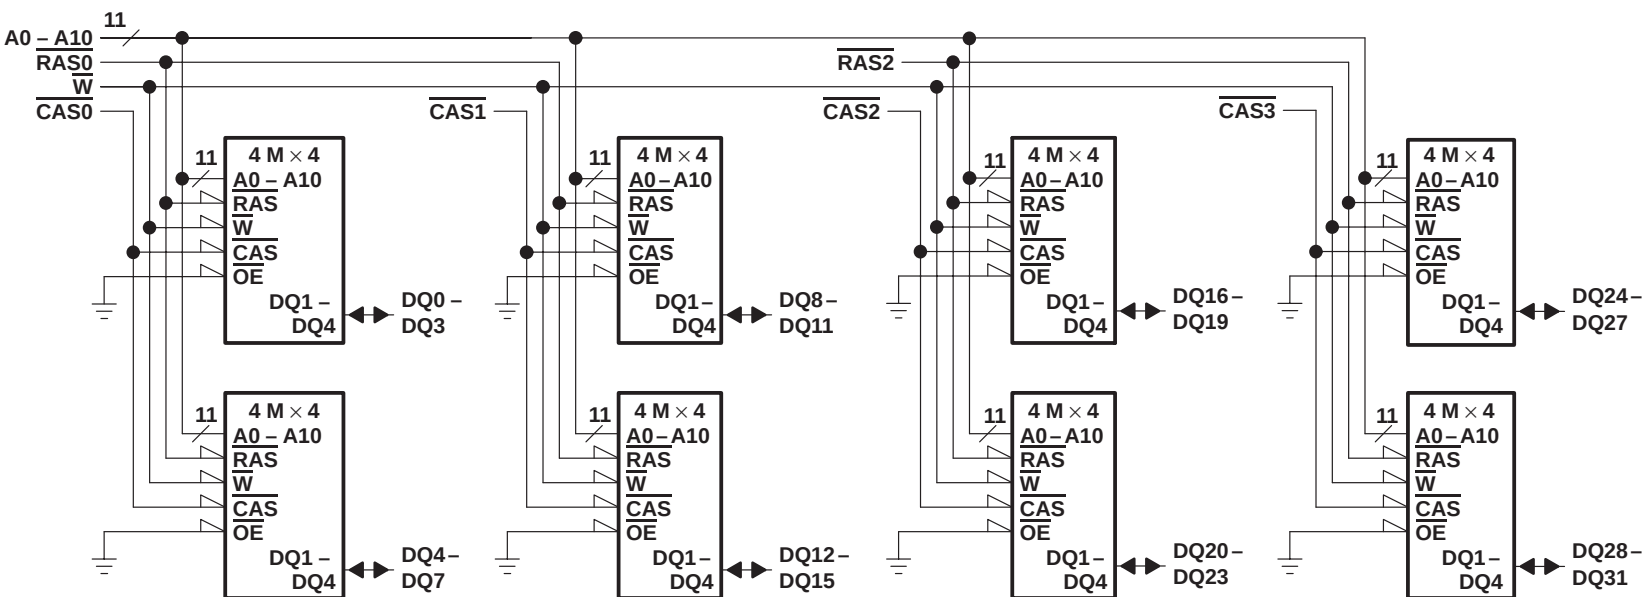

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage range, V_{CC} (see Note 1)	– 1 V to 7 V
Voltage range on any pin (see Note 1)	– 1 V to 7 V
Short-circuit output current	50 mA
Power dissipation	8 W
Operating free-air temperature range, T_A	0°C to 70°C
Storage temperature range, T_{stg}	– 55°C to 125°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values are with respect to V_{SS} .

recommended operating conditions

	MIN	NOM	MAX	UNIT
V_{CC} Supply voltage	4.5	5	5.5	V
V_{IH} High-level input voltage	2.4		6.5	V
V_{IL} Low-level input voltage (see Note 2)	– 1		0.8	V
T_A Operating free-air temperature	0		70	°C

NOTE 2: The algebraic convention, where the more negative (less positive) limit is designated as minimum, is used for logic-voltage levels only.

electrical characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

PARAMETER	TEST CONDITIONS [‡]	'497BBK32-60		'497BBK32-70		'497BBK32-80		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
V_{OH} High-level output voltage	$I_{OH} = -5$ mA	2.4		2.4		2.4		V
V_{OL} Low-level output voltage	$I_{OL} = 4.2$ mA		0.4		0.4		0.4	V
I_I Input current (leakage)	$V_{CC} = 5.5$ V, $V_I = 0$ V to 6.5 V, All others = 0 V to V_{CC}		± 80		± 80		± 80	µA
I_O Output current (leakage)	$V_{CC} = 5.5$ V, $V_O = 0$ V to V_{CC} , CAS high		± 10		± 10		± 10	µA
I_{CC1} Read- or write-cycle current (see Note 3)	$V_{CC} = 5.5$ V, Minimum cycle		880		800		720	mA
I_{CC2} Standby current	$V_{IH} = 2.4$ V (TTL), After 1 memory cycle, RAS and CAS high		16		16		16	mA
	$V_{IH} = V_{CC} - 0.2$ V (CMOS), After 1 memory cycle, RAS and CAS high		8		8		8	mA
I_{CC3} Average refresh current (RAS only or CBR) (see Note 3)	$V_{CC} = 5.5$ V, Minimum cycle, RAS cycling, CAS high (RAS only); RAS low after CAS low (CBR)		880		800		720	mA
I_{CC4} Average page current (see Note 4)	$V_{CC} = 5.5$ V, $t_{PC} = \text{MIN}$, RAS low, CAS cycling		560		480		400	mA

[‡] For test conditions shown as MIN/MAX, use the appropriate value specified under recommended operating conditions.

NOTES: 3. Measured with a maximum of one address change while $\overline{\text{RAS}} = V_{IL}$
4. Measured with a maximum of one address change while $\text{CAS} = V_{IH}$

capacitance over recommended ranges of supply voltage and operating free-air temperature, $f = 1$ MHz (see Note 5)

PARAMETER	MIN	MAX	UNIT
$C_i(A)$ Input capacitance, address inputs		40	pF
$C_i(R)$ Input capacitance, $\overline{RAS}$ inputs		28	pF
$C_i(C)$ Input capacitance, $\overline{CAS}$ inputs		14	pF
$C_i(W)$ Input capacitance, write-enable input		56	pF
$C_o(DQ)$ Output capacitance on DQ pins		7	pF

NOTE 5: $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$, and the bias on pins under test is 0 V.

switching characteristics over recommended ranges of supply voltage and operating free-air temperature

PARAMETER	'497BBK32-60		'497BBK32-70		'497BBK32-80		UNIT
	MIN	MAX	MIN	MAX	MIN	MAX	
t_{AA} Access time from column address		30		35		40	ns
t_{CAC} Access time from $\overline{CAS}$ low		15		18		20	ns
t_{CPA} Access time from column precharge		35		40		45	ns
t_{RAC} Access time from $\overline{RAS}$ low		60		70		80	ns
t_{CLZ} $\overline{CAS}$ to output in low-impedance state	0		0		0		ns
t_{OH} Output disable time from start of $\overline{CAS}$ high	3		3		3		ns
t_{OFF} Output disable time after $\overline{CAS}$ high (see Note 6)	0	15	0	18	0	20	ns

NOTE 6: t_{OFF} is specified when the output is no longer driven.

timing requirements over recommended ranges of supply voltage and operating free-air temperature

	'497BBK32-60		'497BBK32-70		'497BBK32-80		UNIT
	MIN	MAX	MIN	MAX	MIN	MAX	
t_{RC} Cycle time, random read or write (see Note 7)	110		130		150		ns
t_{PC} Cycle time, page-mode read or write (see Notes 7 and 8)	40		45		50		ns
t_{RASP} Pulse duration, page-mode, $\overline{RAS}$ low	60	100 000	70	100 000	80	100 000	ns
t_{RAS} Pulse duration, non-page-mode, $\overline{RAS}$ low	60	10 000	70	10 000	80	10 000	ns
t_{CAS} Pulse duration, $\overline{CAS}$ low	15	10 000	18	10 000	20	10 000	ns
t_{CP} Pulse duration, $\overline{CAS}$ high	10		10		10		ns
t_{RP} Pulse duration, $\overline{RAS}$ high (precharge)	40		50		60		ns
t_{WP} Pulse duration, $\overline{W}$ low	10		10		10		ns
t_{ASC} Setup time, column address before $\overline{CAS}$ low	0		0		0		ns
t_{ASR} Setup time, row address before $\overline{RAS}$ low	0		0		0		ns
t_{DS} Setup time, data before $\overline{CAS}$ low	0		0		0		ns
t_{RCS} Setup time, $\overline{W}$ high before $\overline{CAS}$ low	0		0		0		ns
t_{CWL} Setup time, $\overline{W}$ -low before $\overline{CAS}$ high	15		18		20		ns
t_{RWL} Setup time, $\overline{W}$ -low before $\overline{RAS}$ high	15		18		20		ns
t_{WCS} Setup time, $\overline{W}$ -low before $\overline{CAS}$ low	0		0		0		ns
t_{WRP} Setup time, $\overline{W}$ -high before $\overline{RAS}$ low (CBR refresh only)	10		10		10		ns

NOTES: 7. All cycles assume $t_T = 5$ ns.

8. To assure t_{PC} min, t_{ASC} should be $\geq t_{CP}$.


timing requirements over recommended ranges of supply voltage and operating free-air temperature

		'497BBK32-60		'497BBK32-70		'497BBK32-80		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
t _{CAH}	Hold time, column address after $\overline{\text{CAS}}$ low	10		15		15		ns
t _{RHCP}	Hold time, $\overline{\text{RAS}}$ high from $\overline{\text{CAS}}$ precharge	35		40		45		ns
t _{DH}	Hold time, data after $\overline{\text{CAS}}$ low	10		15		15		ns
t _{RAH}	Hold time, row address after $\overline{\text{RAS}}$ low	10		10		10		ns
t _{RCH}	Hold time, $\overline{\text{W}}$ high after $\overline{\text{CAS}}$ high (see Note 9)	0		0		0		ns
t _{RRH}	Hold time, $\overline{\text{W}}$ high after $\overline{\text{RAS}}$ high (see Note 9)	0		0		0		ns
t _{WCH}	Hold time, $\overline{\text{W}}$ low after $\overline{\text{CAS}}$ low	10		15		15		ns
t _{WRH}	Hold time, $\overline{\text{W}}$ high after $\overline{\text{RAS}}$ low (CBR refresh only)	10		10		10		ns
t _{CHR}	Delay time, $\overline{\text{RAS}}$ low to $\overline{\text{CAS}}$ high (CBR refresh only)	10		10		10		ns
t _{CRP}	Delay time, $\overline{\text{CAS}}$ high to $\overline{\text{RAS}}$ low	5		5		5		ns
t _{CSH}	Delay time, $\overline{\text{RAS}}$ low to $\overline{\text{CAS}}$ high	60		70		80		ns
t _{CSR}	Delay time, $\overline{\text{CAS}}$ low to $\overline{\text{RAS}}$ low (CBR refresh only)	5		5		5		ns
t _{RAD}	Delay time, $\overline{\text{RAS}}$ low to column address (see Note 10)	15	30	15	35	15	40	ns
t _{RAL}	Delay time, column address to $\overline{\text{RAS}}$ high	30		35		40		ns
t _{CAL}	Delay time, column address to $\overline{\text{CAS}}$ high	30		35		40		ns
t _{RCD}	Delay time, $\overline{\text{RAS}}$ low to $\overline{\text{CAS}}$ low (see Note 10)	20	45	20	52	20	60	ns
t _{RPC}	Delay time, $\overline{\text{RAS}}$ high to $\overline{\text{CAS}}$ low (CBR only)	0		0		0		ns
t _{RSH}	Delay time, $\overline{\text{CAS}}$ low to $\overline{\text{RAS}}$ high	15		18		20		ns
t _{REF}	Refresh time interval		32		32		32	ms
t _T	Transition time	3	30	3	30	3	30	ns

9. Either t_{RRH} or t_{RCH} must be satisfied for a read cycle.

10. The maximum value is specified only to assure access time.

device symbolization

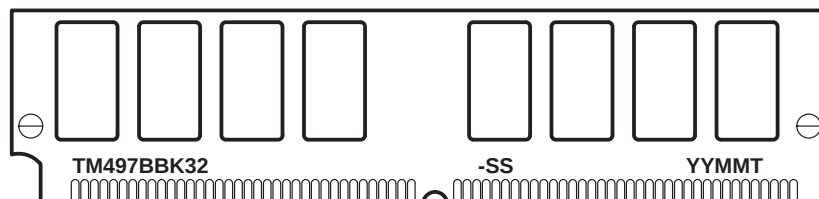

YY = Year Code
MM = Month Code
T = Assembly Site Code
-SS = Speed Code

NOTE: The location of the part number may vary.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.