




British Wallplate Modul

TA231A

UL E134232

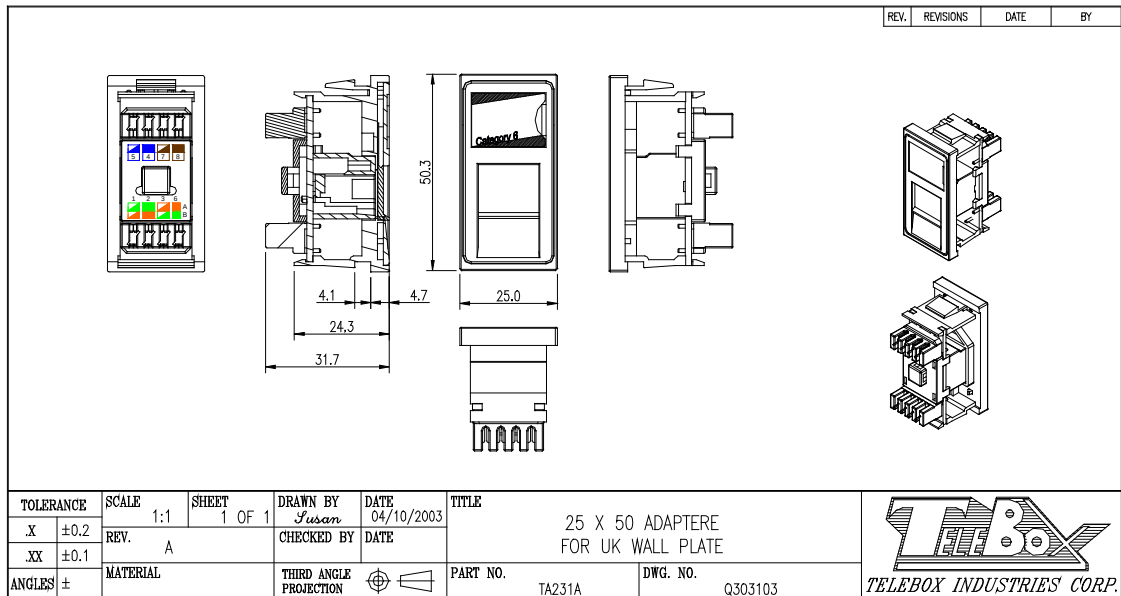

Electrical

Current rating: 1.5 Amps
Insulation resistance: 500 mohms minimum
Contact resistance: 20 mohms maximum
DC resistance: 0.1ohms maximum
Comply Cat.6 permanent link performance

Mechanical

Plug insertion life: 750 cycles minimum
Plug & jack contact force: 100 gramsminimum
using FCC-Approved plug
Plug retention force: 30 lbs minimum
Temperature: -40° to 150°F (-40° to 68°C)

Physicals

Housing: High impact flame retardant plastic,
UL 94V-0 rated
PCB: FR4, 1.0mm thickness
Jack wiring: 30μ"/0.80μm of gold over
100μ"/2.54μm of nickel
Connector: Insulation displacement connector
(IDC) accept 22~26 Awg solid wire




TA231A

Ordering Information

TA23X	X	(X)	-	XX
1: Cat.6	1 : 1 post	Blank	:TA5162	WH:White
2: Cat5e	2 : 2 posts	B	:TA5105-2	
	3 : 3 posts			
	A : 25x50 module			
	B : 50x50 module			
	X : 12.5x50 blank cover			

TA2311-XX = TA5162 + TA231A*1+ TA231X*2
TA2312-XX = TA5162 + TA231A*2
TA2313-XX = TA5162 + TA231B

TA2311B-XX = TA5105-2 + TA231A*1 +TA231X*2
TA2312B-XX = TA5105-2 + TA231A*2
TA2313B-XX = TA5105-2 + TA231B

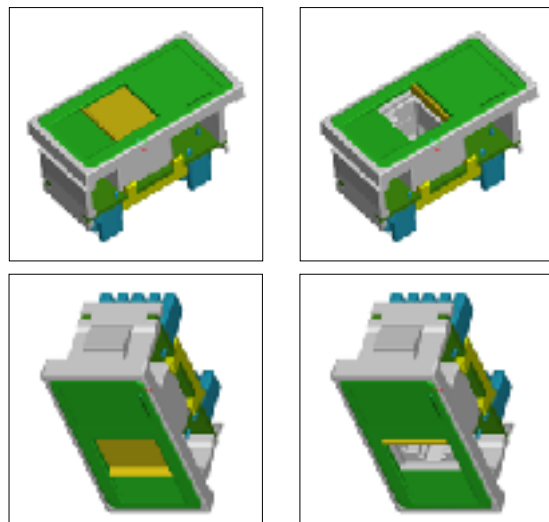

TELEBOX INDUSTRIES CORP.

Tel:+886-2-26429337 Fax:+886-2 -26425779 [http:// www.telebox.com](http://www.telebox.com)