


# NSB8AT THRU NSB8MT

**GLASS PASSIVATED GENERAL PURPOSE PLASTIC RECTIFIER**  
**Reverse Voltage - 50 to 1000 Volts**    **Forward Current - 8.0 Amperes**

## TO-263AA

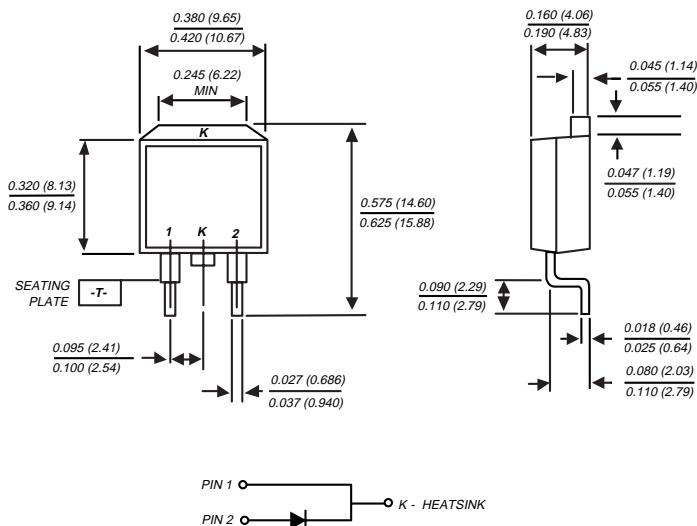

Dimensions in inches and (millimeters)

## FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High forward current capability
- ◆ High surge current capability
- ◆ Low forward voltage drop
- ◆ Glass passivated chip junction
- ◆ High temperature soldering in accordance with CECC 802 / Reflow guaranteed



## MECHANICAL DATA

**Case:** JEDEC TO-263AA molded plastic body

**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026

**Polarity:** As marked

**Mounting Position:** Any

**Weight:** 0.08 ounce, 2.24 grams

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	NSB8 AT	NSB8 BT	NSB8 DT	NSB8 GT	NSB8 JT	NSB8 KT	NSB8 MT	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current at T <sub>c</sub> =100°C	I <sub>(AV)</sub>				8.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>				175.0				Amps
Maximum instantaneous forward voltage at 8.0A	V <sub>F</sub>				1.1				Volts
Maximum DC reverse current at rated DC blocking voltage	I <sub>R</sub>				10.0				µA
T <sub>c</sub> =25°C T <sub>c</sub> =100°C					100.0				
Typical junction capacitance (NOTE 1)	C <sub>J</sub>				55.0				pF
Typical thermal resistance (NOTE 2)	R <sub>θJC</sub>				3.0				°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>				-55 to +150				°C

### NOTES:

- (1) Measured at 1.0 MHz and applied reversed voltage of 4.0 Volts  
 (2) Thermal resistance from junction to case mounted on heatsink

## RATINGS AND CHARACTERISTIC CURVES NSB8AT THRU NSB8MT

FIG.1 - FORWARD CURRENT DERATING CURVE

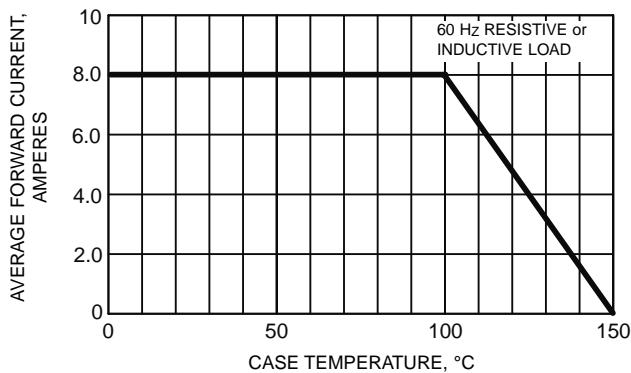


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

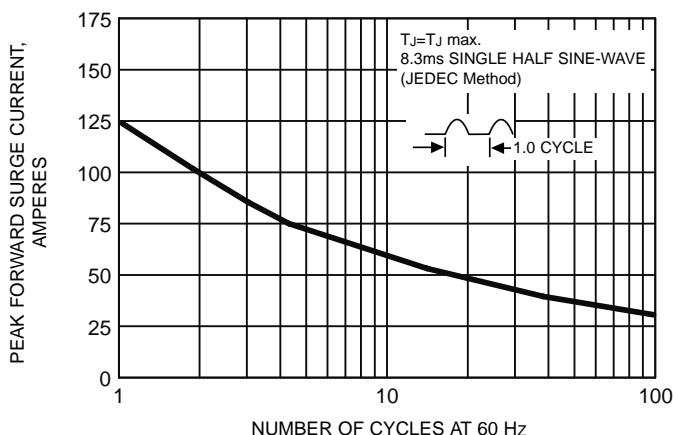


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

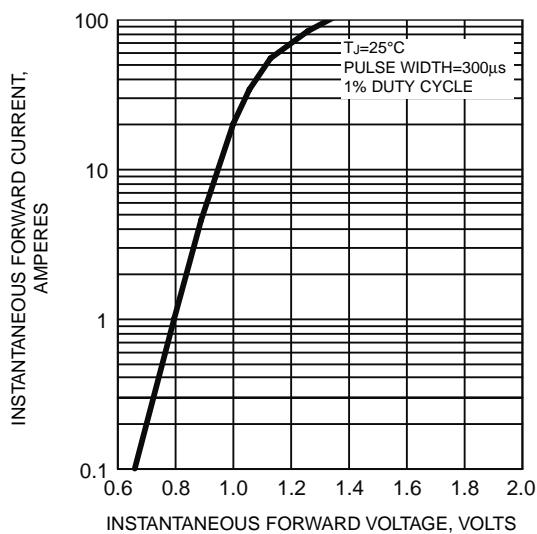


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

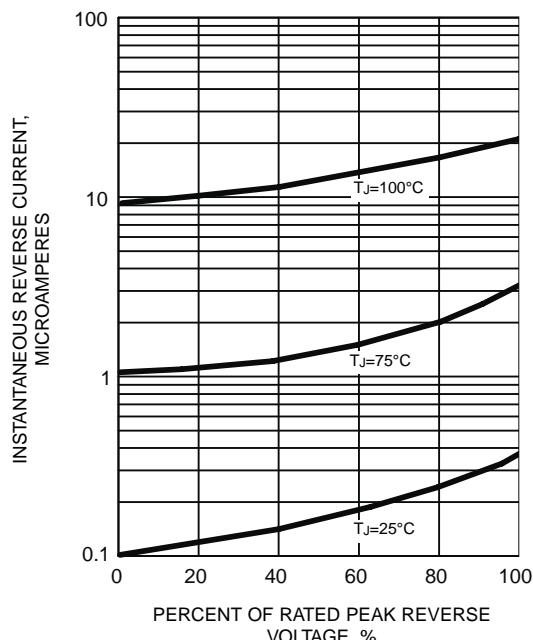


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

