

## SPECIFICATIONS

|                       |                       |
|-----------------------|-----------------------|
| Switch Function       | DPDT                  |
| Electrical Ratings    | 200mA @ 30VDC         |
| Electrical Life       | 10,000 cycles typical |
| Contact Resistance    | < 50 mΩ initial       |
| Actuation Force       | 200 +/- 100gF         |
| Actuator Travel       | 4.0 mm total          |
| Dielectric Strength   | 1000Vrms min          |
| Insulation Resistance | > 100MΩ min           |
| Operating Temperature | -40°C to 85°C         |
| Storage Temperature   | -40°C to 85°C         |




## MATERIALS ←RoHS COMPLIANT

|           |                                |
|-----------|--------------------------------|
| Actuator  | Acetal                         |
| Housing   | Steel                          |
| Base      | Phenolic                       |
| Contacts  | Phosphor Bronze, Silver Plated |
| Terminals | Brass, Silver Plated           |

## ORDERING INFORMATION

|                     |               |           |
|---------------------|---------------|-----------|
| 1. Series:          | <b>MS2205</b> | <b>L6</b> |
|                     | MS2205        |           |
| 2. Actuator Length: |               |           |
|                     | L2 = 2mm      |           |
|                     | L4 = 4mm      |           |
|                     | L6 = 6mm      |           |

## DIMENSIONS

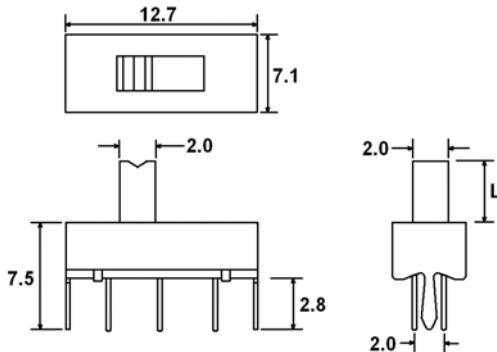

## SCHEMATIC & PC LAYOUT

