

PRELIMINARY DATA SHEET

**NEC**

**NPN SILICON EPITAXIAL TWIN TRANSISTOR**

**UPA832TF**


**FEATURES**

- **LOW NOISE:**  
Q1:  $NF = 1.2 \text{ dB TYP}$  at  $f = 1 \text{ GHz}$ ,  $V_{CE} = 3 \text{ V}$ ,  $I_c = 7 \text{ mA}$   
Q2:  $NF = 1.5 \text{ dB TYP}$  at  $f = 2 \text{ GHz}$ ,  $V_{CE} = 3 \text{ V}$ ,  $I_c = 3 \text{ mA}$
- **HIGH GAIN:**  
Q1:  $|S_{21E}|^2 = 9.0 \text{ dB TYP}$  at  $f = 1 \text{ GHz}$ ,  $V_{CE} = 3 \text{ V}$ ,  $I_c = 7 \text{ mA}$   
Q2:  $|S_{21E}|^2 = 8.5 \text{ dB TYP}$  at  $f = 2 \text{ GHz}$ ,  $V_{CE} = 3 \text{ V}$ ,  $I_c = 10 \text{ mA}$
- **6-PIN THIN-TYPE SMALL MINI MOLD PACKAGE**
- **2 DIFFERENT BUILT-IN TRANSISTORS**  
(Q1: NE856, Q2: NE685)

**DESCRIPTION**

The UPA832TF has two different built-in transistors for low cost amplifier and oscillator applications in the VHF/UHF band. Low noise figures, high gain, high current capability, and medium output give this device for high dynamic range with excellent linearity for two-stage amplifiers. This device is also ideally suited for use in a VCO/buffer amplifier application. The thinner package style allows for higher density designs.

**OUTLINE DIMENSIONS** (Units in mm)

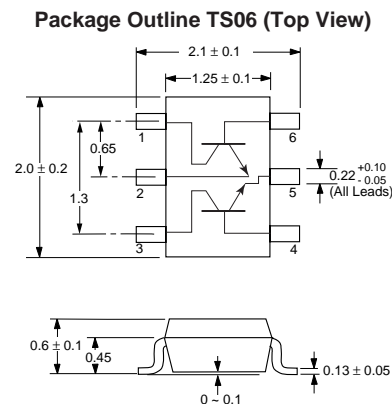

**PIN CONNECTIONS**

1. Collector (Q1)
2. Emitter (Q1)
3. Collector (Q2)
4. Base (Q2)
5. Emitter (Q2)
6. Base (Q1)

**Note:**

Pin 1 is the lower left most pin as the package lettering is oriented and read left to right.

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$ )

PART NUMBER PACKAGE OUTLINE				UPA832TF TS06		
	SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
Q1	ICBO	Collector Cutoff Current at $V_{CB} = 10 \text{ V}$ , $I_E = 0$	$\mu\text{A}$			1
	IEBO	Emitter Cutoff Current at $V_{EB} = 1 \text{ V}$ , $I_C = 0$	$\mu\text{A}$			1
	hFE	DC Current Gain <sup>1</sup> at $V_{CE} = 3 \text{ V}$ , $I_c = 7 \text{ mA}$		100		145
	ft	Gain Bandwidth at $V_{CE} = 3 \text{ V}$ , $I_c = 7 \text{ mA}$ , $f = 1 \text{ GHz}$	GHz	3.0	4.5	
	Cre	Feedback Capacitance <sup>2</sup> at $V_{CB} = 3 \text{ V}$ , $I_E = 0$ , $f = 1 \text{ MHz}$	pF		0.7	1.5
	$ S_{21E} ^2$	Insertion Power Gain at $V_{CE} = 3 \text{ V}$ , $I_c = 7 \text{ mA}$ , $f = 1 \text{ GHz}$	dB	7	9	
	NF	Noise Figure at $V_{CE} = 3 \text{ V}$ , $I_c = 7 \text{ mA}$ , $f = 1 \text{ GHz}$	dB		1.2	2.5
Q2	ICBO	Collector Cutoff Current at $V_{CB} = 5 \text{ V}$ , $I_E = 0$	$\mu\text{A}$			0.1
	IEBO	Emitter Cutoff Current at $V_{EB} = 1 \text{ V}$ , $I_C = 0$	$\mu\text{A}$			0.1
	hFE	DC Current Gain <sup>1</sup> at $V_{CE} = 3 \text{ V}$ , $I_c = 10 \text{ mA}$		75		150
	ft	Gain Bandwidth at $V_{CE} = 3 \text{ V}$ , $I_c = 10 \text{ mA}$ , $f = 2 \text{ GHz}$	GHz		12	
	Cre <sup>2</sup>	Feedback Capacitance <sup>2</sup> at $V_{CB} = 3 \text{ V}$ , $I_E = 0$ , $f = 1 \text{ MHz}$	pF		0.4	0.7
	$ S_{21E} ^2$	Insertion Power Gain at $V_{CE} = 3 \text{ V}$ , $I_c = 10 \text{ mA}$ , $f = 2 \text{ GHz}$	dB	7	8.5	
	NF	Noise Figure at $V_{CE} = 3 \text{ V}$ , $I_c = 3 \text{ mA}$ , $f = 2 \text{ GHz}$	dB		1.5	2.5





Notes: 1. Pulsed measurement, pulse width  $\leq 350 \mu\text{s}$ , duty cycle  $\leq 2\%$ .  
2. Collector to base capacitance when measured with capacitance meter (automatic balanced bridge method), with emitter connected to guard pin of capacitances meter.

**ABSOLUTE MAXIMUM RATINGS<sup>1</sup>** (T<sub>A</sub> = 25°C)







SYMBOLS	PARAMETERS	UNITS	RATINGS	
			Q1	Q2
V <sub>CB0</sub>	Collector to Base Voltage	V	20	9
V <sub>CE0</sub>	Collector to Emitter Voltage	V	12	6
V <sub>EBO</sub>	Emitter to Base Voltage	V	3	2
I <sub>c</sub>	Collector Current	mA	100	30
P <sub>T</sub>	Total Power Dissipation	mW	150	150
			200 <sup>2</sup>	
T <sub>J</sub>	Junction Temperature	°C	150	150
T <sub>STG</sub>	Storage Temperature	°C	-65 to +150	

Note: 1. Operation in excess of any one of these parameters may result in permanent damage.  
 2. When operating both devices, the power dissipation for either device should not exceed 110 mW.







**TYPICAL PERFORMANCE CURVES** (T<sub>A</sub> = 25°C)

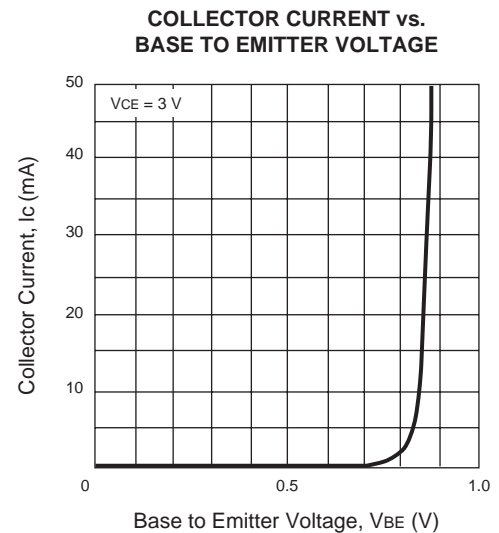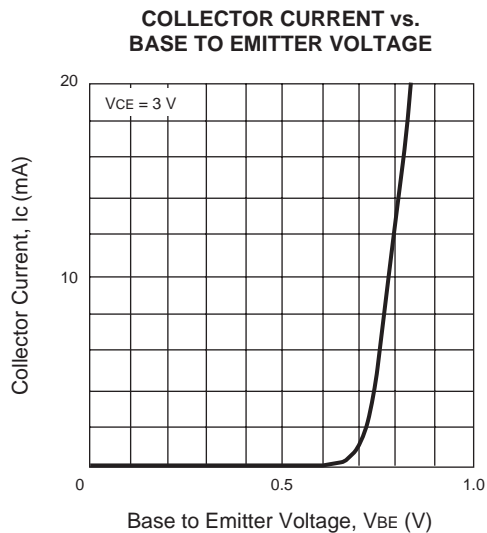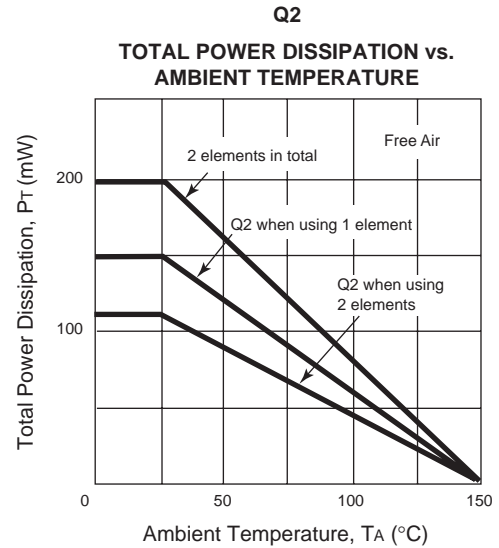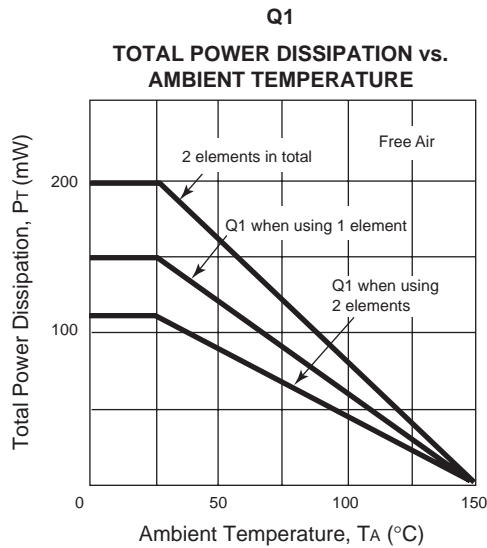


TYPICAL PERFORMANCE CURVES (T<sub>A</sub> = 25°C)

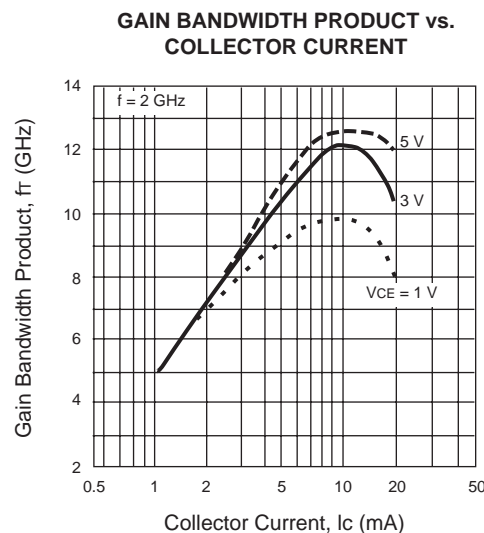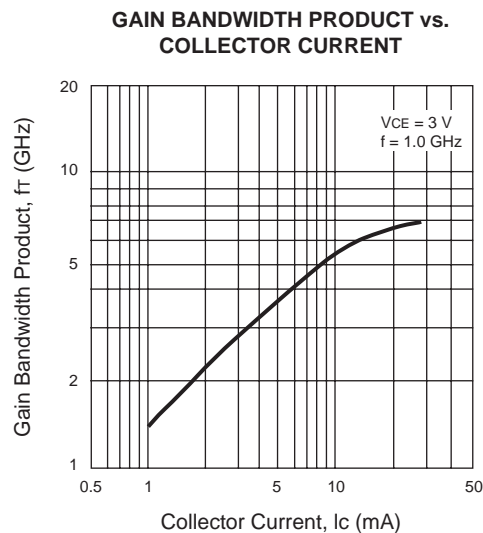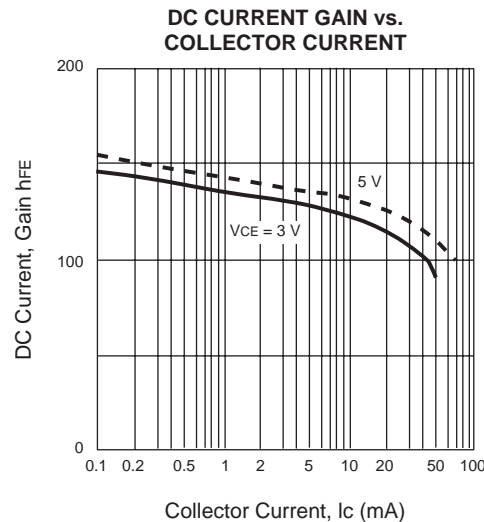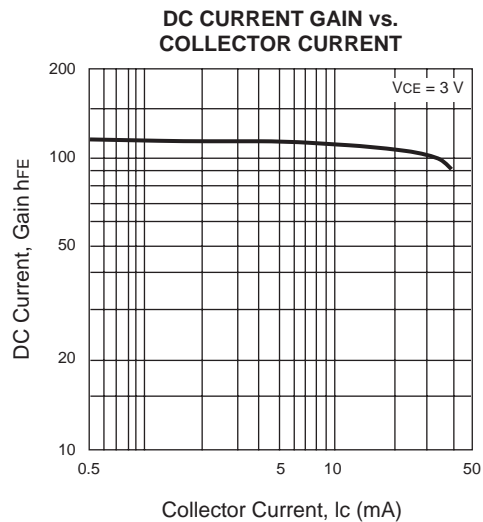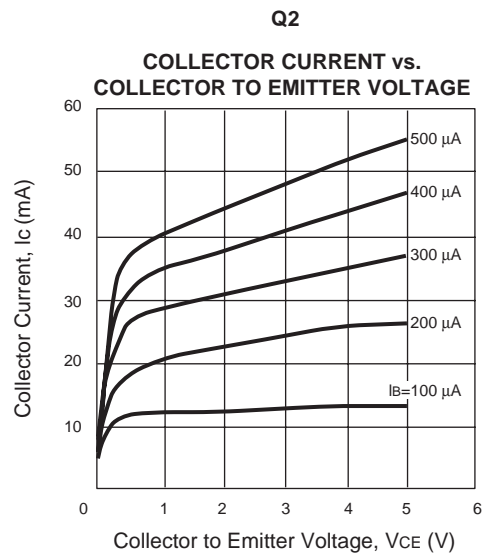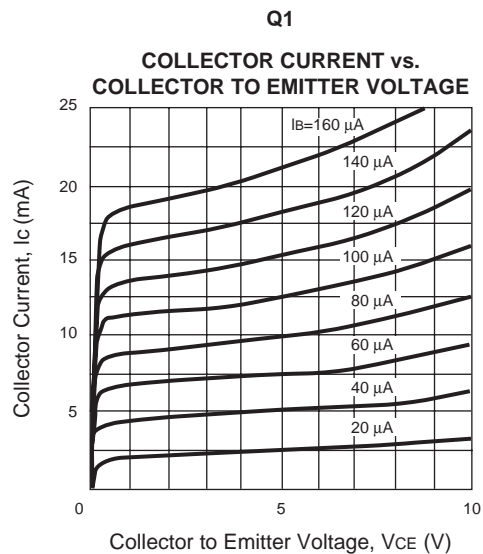

TYPICAL PERFORMANCE CURVES (T<sub>A</sub> = 25°C)

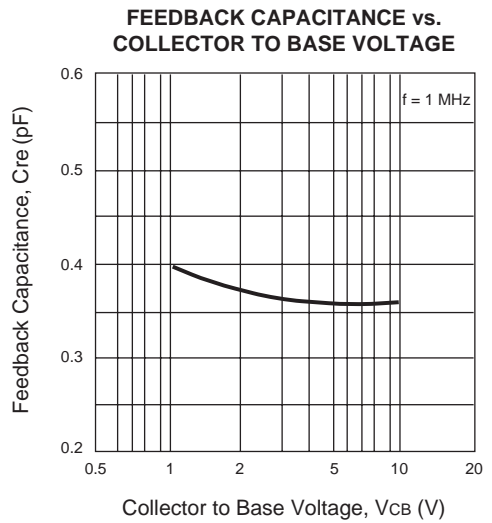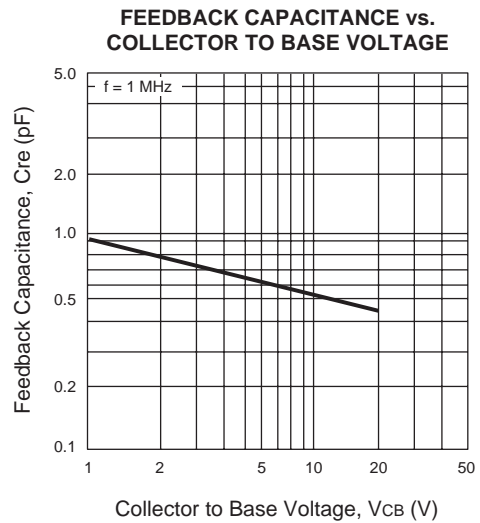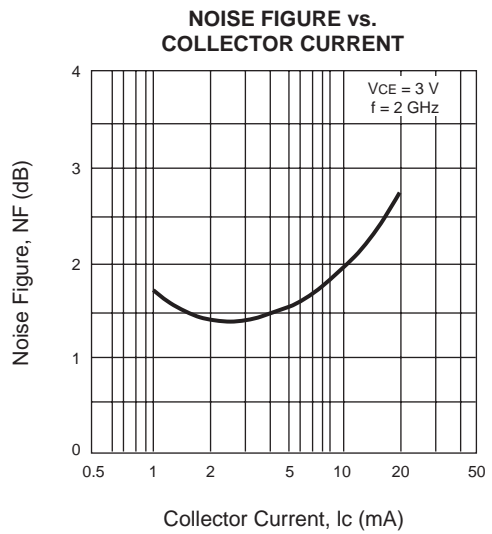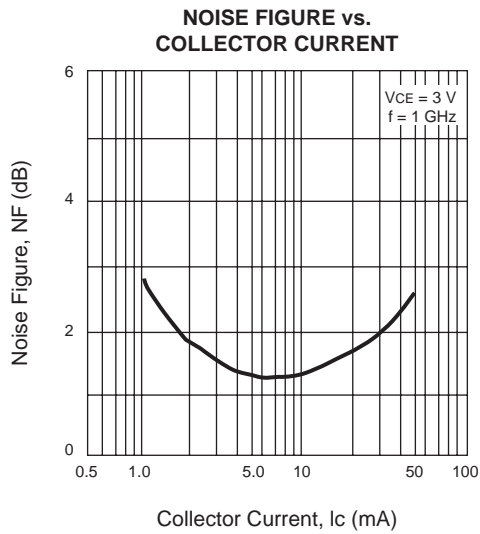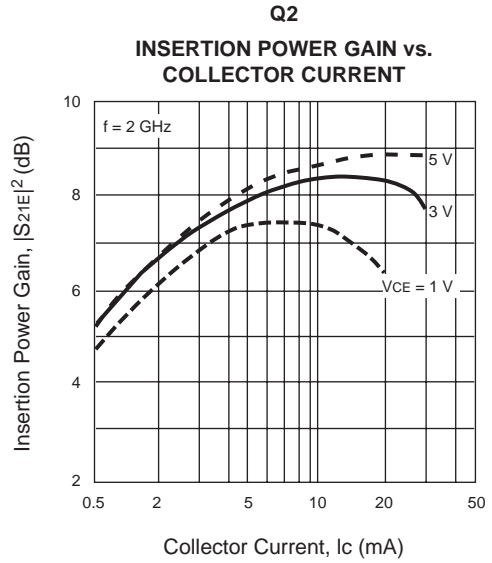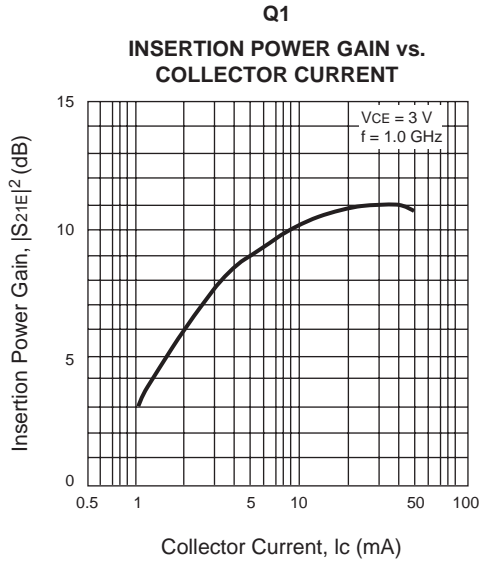

## TYPICAL PERFORMANCE CURVES (T<sub>A</sub> = 25°C)

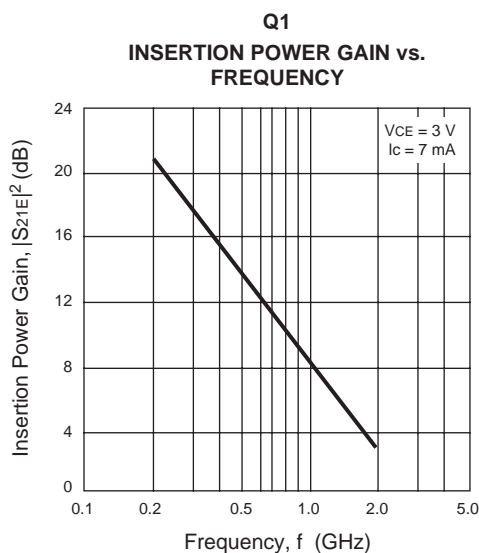

## TYPICAL SCATTERING PARAMETERS

### Q1

VCE = 3 V, Ic = 1 mA, Z<sub>0</sub> = 50 Ω

FREQUENCY (GHz)	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.10	0.97	-20.45	2.38	162.85	0.04	76.56	0.98	-8.59
0.20	0.94	-40.17	2.31	148.19	0.08	63.82	0.94	-16.05
0.30	0.90	-59.57	2.25	135.26	0.11	52.97	0.89	-22.20
0.40	0.86	-77.29	2.10	123.99	0.13	43.63	0.83	-27.30
0.50	0.82	-94.54	2.03	113.53	0.15	36.13	0.78	-31.16
0.60	0.79	-110.15	1.92	104.19	0.16	29.28	0.74	-34.67
0.70	0.76	-124.06	1.80	95.54	0.16	23.65	0.70	-37.55
0.80	0.74	-136.61	1.69	87.82	0.16	19.18	0.67	-40.06
0.90	0.72	-148.19	1.59	80.80	0.16	15.47	0.65	-42.54
1.00	0.71	-158.16	1.48	74.49	0.16	12.65	0.64	-44.88
1.20	0.70	-175.72	1.30	63.28	0.15	8.37	0.61	-49.79
1.50	0.71	162.88	1.09	49.18	0.13	7.58	0.59	-57.73
1.70	0.72	151.31	0.97	41.14	0.12	11.56	0.58	-64.34
2.00	0.75	136.95	0.83	31.08	0.11	23.61	0.57	-74.83
2.50	0.78	117.97	0.66	18.15	0.13	45.08	0.57	-95.23
3.00	0.81	103.52	0.54	10.02	0.19	50.48	0.58	-118.13

### Q2

VCE = 3 V, Ic = 1 mA, Z<sub>0</sub> = 50 Ω

FREQUENCY (GHz)	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.10	0.98	-5.93	2.43	171.79	0.02	85.64	0.99	-3.75
0.20	0.97	-11.82	2.41	164.40	0.04	80.86	0.99	-7.53
0.30	0.95	-17.85	2.42	157.59	0.05	76.45	0.97	-11.10
0.40	0.93	-23.59	2.39	151.04	0.07	72.26	0.95	-14.56
0.50	0.90	-29.61	2.38	144.91	0.09	68.73	0.93	-17.91
0.60	0.87	-35.62	2.37	139.49	0.10	64.78	0.90	-21.19
0.70	0.84	-41.49	2.34	133.87	0.11	61.52	0.87	-23.71
0.80	0.81	-47.40	2.32	128.66	0.12	58.06	0.85	-26.91
0.90	0.77	-53.49	2.32	123.12	0.13	55.30	0.82	-29.05
1.00	0.73	-59.00	2.26	118.06	0.14	52.86	0.78	-31.52
1.20	0.65	-71.05	2.21	108.31	0.16	48.61	0.73	-35.51
1.50	0.54	-89.53	2.13	94.49	0.17	43.82	0.66	-41.12
1.70	0.47	-101.29	2.02	86.01	0.18	41.68	0.61	-44.56
2.00	0.40	-120.45	1.90	74.87	0.19	39.57	0.55	-49.87
2.50	0.33	-153.17	1.71	57.60	0.21	38.43	0.46	-59.91
3.00	0.33	177.01	1.54	42.57	0.23	38.11	0.38	-74.21

## TYPICAL SCATTERING PARAMETERS

## Q1

VCE = 3 V, IC = 3 mA, Z0 = 50 Ω

FREQUENCY (GHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.10	0.90	-29.42	6.73	156.08	0.04	70.94	0.93	-16.82
0.20	0.83	-56.61	6.15	138.83	0.07	55.92	0.82	-29.40
0.30	0.75	-82.38	5.66	124.38	0.09	46.12	0.70	-37.28
0.40	0.70	-104.35	5.08	112.82	0.10	39.45	0.61	-42.73
0.50	0.65	-122.97	4.52	102.90	0.11	35.38	0.54	-45.93
0.60	0.62	-138.09	4.00	94.98	0.11	32.50	0.49	-48.61
0.70	0.60	-150.60	3.57	88.01	0.11	30.78	0.45	-50.55
0.80	0.59	-161.35	3.21	82.00	0.11	30.02	0.42	-52.19
0.90	0.59	-170.46	2.90	76.74	0.12	29.88	0.40	-54.08
1.00	0.59	-178.60	2.65	71.87	0.12	30.03	0.38	-55.78
1.20	0.59	167.50	2.25	62.99	0.12	31.42	0.36	-59.72
1.50	0.61	150.72	1.82	51.53	0.13	34.65	0.33	-67.05
1.70	0.63	141.52	1.61	44.61	0.14	36.98	0.32	-73.46
2.00	0.66	130.09	1.38	35.44	0.15	39.97	0.31	-84.11
2.50	0.70	114.27	1.10	21.83	0.19	42.08	0.31	-105.22
3.00	0.75	102.28	0.91	10.82	0.22	41.10	0.33	-128.59

## Q2

VCE = 3 V, IC = 3 mA, Z0 = 50 Ω

FREQUENCY (GHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.10	0.93	-9.39	6.76	166.53	0.02	82.60	0.98	-7.24
0.20	0.90	-18.39	6.46	155.80	0.03	76.86	0.94	-13.64
0.30	0.84	-27.39	6.32	146.52	0.05	71.65	0.89	-18.91
0.40	0.79	-35.83	6.06	138.21	0.06	67.47	0.83	-23.49
0.50	0.72	-44.06	5.82	130.60	0.07	64.58	0.77	-26.46
0.60	0.66	-51.67	5.54	123.94	0.08	61.95	0.72	-29.65
0.70	0.59	-58.86	5.28	117.07	0.09	60.46	0.68	-31.43
0.80	0.53	-65.57	5.01	111.07	0.10	59.12	0.64	-33.17
0.90	0.48	-71.57	4.72	105.46	0.10	57.98	0.60	-34.36
1.00	0.43	-77.20	4.45	100.46	0.11	57.39	0.57	-35.31
1.20	0.34	-87.82	3.95	91.74	0.13	56.54	0.52	-37.08
1.50	0.26	-104.50	3.37	80.85	0.15	55.21	0.46	-39.70
1.70	0.22	-116.75	3.06	74.57	0.16	54.46	0.43	-41.65
2.00	0.19	-137.84	2.71	66.02	0.18	53.01	0.38	-44.95
2.50	0.19	-174.18	2.29	53.07	0.22	49.89	0.30	-52.82
3.00	0.24	159.82	1.99	41.14	0.26	45.56	0.22	-65.40

## TYPICAL SCATTERING PARAMETERS

### Q1

VCE = 3 V, Ic = 5 mA, Z<sub>0</sub> = 50 Ω

FREQUENCY (GHz)	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.10	0.84	-37.26	10.52	150.99	0.04	67.19	0.89	-23.52
0.20	0.74	-70.72	9.17	131.67	0.06	52.38	0.72	-38.66
0.30	0.65	-100.14	7.97	116.47	0.07	44.81	0.58	-46.62
0.40	0.60	-122.73	6.76	105.34	0.08	41.17	0.48	-51.47
0.50	0.57	-139.98	5.74	96.73	0.09	39.62	0.42	-54.25
0.60	0.55	-153.16	4.95	89.92	0.09	38.83	0.37	-56.48
0.70	0.54	-163.95	4.33	84.13	0.10	38.89	0.34	-58.22
0.80	0.54	-173.01	3.85	78.92	0.10	39.22	0.31	-59.93
0.90	0.54	179.14	3.44	74.44	0.11	40.21	0.30	-61.82
1.00	0.54	172.20	3.13	70.19	0.11	40.98	0.28	-63.63
1.20	0.55	160.12	2.63	62.35	0.12	42.12	0.26	-68.02
1.50	0.58	145.43	2.12	51.94	0.14	43.44	0.23	-76.52
1.70	0.60	137.23	1.88	45.70	0.15	44.06	0.22	-84.21
2.00	0.63	126.82	1.60	37.07	0.17	43.80	0.22	-96.22
2.50	0.68	112.54	1.28	23.75	0.21	41.92	0.22	-120.22
3.00	0.72	101.25	1.06	12.85	0.24	38.40	0.25	-144.01

### Q2

VCE = 3 V, Ic = 5 mA, Z<sub>0</sub> = 50 Ω

FREQUENCY (GHz)	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.10	0.89	-12.31	10.46	162.72	0.02	81.62	0.96	-9.77
0.20	0.83	-23.63	9.75	149.86	0.03	74.55	0.90	-17.75
0.30	0.75	-34.70	9.25	138.82	0.04	69.69	0.81	-23.24
0.40	0.66	-44.55	8.62	129.30	0.06	66.77	0.74	-27.15
0.50	0.57	-53.23	7.96	120.72	0.06	64.98	0.68	-29.45
0.60	0.50	-60.42	7.27	113.73	0.07	63.78	0.62	-31.18
0.70	0.43	-66.51	6.64	107.23	0.08	63.20	0.58	-32.03
0.80	0.37	-71.94	6.08	101.84	0.09	62.73	0.55	-32.89
0.90	0.33	-76.60	5.57	97.19	0.10	62.37	0.52	-33.36
1.00	0.29	-81.19	5.15	92.96	0.10	62.23	0.49	-33.76
1.20	0.23	-90.41	4.45	85.71	0.12	61.60	0.45	-34.67
1.50	0.17	-106.89	3.70	76.63	0.14	60.08	0.40	-36.32
1.70	0.15	-120.69	3.33	71.22	0.16	58.93	0.37	-38.02
2.00	0.13	-145.48	2.92	63.46	0.19	57.05	0.33	-40.74
2.50	0.15	176.33	2.45	51.77	0.23	52.54	0.26	-48.08
3.00	0.22	153.43	2.12	40.65	0.27	47.15	0.17	-59.19

## TYPICAL SCATTERING PARAMETERS

## Q1

VCE = 3 V, IC = 7 mA, Z0 = 50 Ω

FREQUENCY (GHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.10	0.79	-44.32	13.71	146.95	0.04	64.19	0.84	-28.71
0.20	0.67	-82.73	11.45	126.15	0.05	50.70	0.64	-44.98
0.30	0.59	-113.49	9.41	111.03	0.07	45.71	0.49	-52.71
0.40	0.55	-134.72	7.67	100.87	0.07	44.09	0.40	-57.18
0.50	0.52	-150.16	6.37	93.24	0.08	43.89	0.35	-59.82
0.60	0.52	-161.98	5.44	87.80	0.08	44.29	0.31	-62.08
0.70	0.51	-171.56	4.71	81.95	0.09	44.90	0.28	-63.86
0.80	0.51	-179.64	4.17	77.28	0.10	45.68	0.26	-65.85
0.90	0.52	173.30	3.73	73.14	0.10	46.53	0.24	-67.95
1.00	0.52	167.06	3.38	69.28	0.11	47.24	0.23	-70.01
1.20	0.54	156.05	2.83	61.95	0.12	47.51	0.21	-75.34
1.50	0.56	142.49	2.28	52.20	0.14	47.48	0.19	-85.78
1.70	0.58	134.85	2.02	46.08	0.16	47.00	0.18	-94.72
2.00	0.61	125.10	1.72	37.91	0.18	45.50	0.18	-108.59
2.50	0.66	111.51	1.37	25.17	0.22	41.98	0.19	-134.34
3.00	0.71	100.68	1.14	14.21	0.25	37.45	0.23	-157.18

## Q2

VCE = 3 V, IC = 10 mA, Z0 = 50 Ω

FREQUENCY (GHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.10	0.79	-18.18	17.81	156.05	0.02	79.00	0.92	-14.07
0.20	0.67	-33.75	15.65	139.27	0.03	72.98	0.80	-22.91
0.30	0.55	-46.32	13.67	125.80	0.04	69.74	0.69	-27.06
0.40	0.44	-55.16	11.71	115.64	0.05	69.07	0.61	-28.96
0.50	0.37	-61.11	10.03	108.02	0.06	68.93	0.56	-29.47
0.60	0.31	-65.90	8.70	102.30	0.07	68.67	0.52	-29.62
0.70	0.26	-69.64	7.66	97.45	0.07	68.49	0.49	-29.55
0.80	0.23	-73.22	6.84	93.31	0.08	68.26	0.46	-29.57
0.90	0.20	-76.64	6.18	89.63	0.09	68.18	0.44	-29.61
1.00	0.18	-80.09	5.63	86.38	0.10	67.74	0.43	-29.60
1.20	0.14	-88.42	4.80	80.51	0.12	66.68	0.40	-29.99
1.50	0.10	-107.91	3.94	72.79	0.15	64.56	0.36	-31.58
1.70	0.08	-126.27	3.53	68.12	0.16	62.66	0.33	-33.11
2.00	0.09	-158.61	3.08	61.31	0.19	59.98	0.29	-35.72
2.50	0.13	164.55	2.57	50.55	0.24	54.48	0.22	-42.08
3.00	0.20	146.66	2.21	40.11	0.28	48.32	0.14	-51.14



**BUILT-IN TRANSISTORS**

	Q1	Q2
3-pin small mini mold part No.	NE85630	NE68530

The UPA835TF features the Q1 and Q2 in inverted positions.

**ORDERING INFORMATION**

PART NUMBER	QUANTITY	PACKAGING
UPA832TF-T1	3000	Tape & Reel

EXCLUSIVE NORTH AMERICAN AGENT FOR **NEC** RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

**CEL** CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279  
24-Hour Fax-On-Demand: 800-390-3232 (U.S. and Canada only) • Internet: <http://WWW.CEL.COM>

DATA SUBJECT TO CHANGE WITHOUT NOTICE



PRINTED IN USA ON RECYCLED PAPER -2/99