


#### MECHANICAL DATA

Dimensions in mm (inches)

### SMALL SIGNAL N-CHANNEL J-FET IN A HERMETICALLY SEALED CERAMIC SURFACE MOUNT PACKAGE FOR HIGH RELIABILITY APPLICATIONS

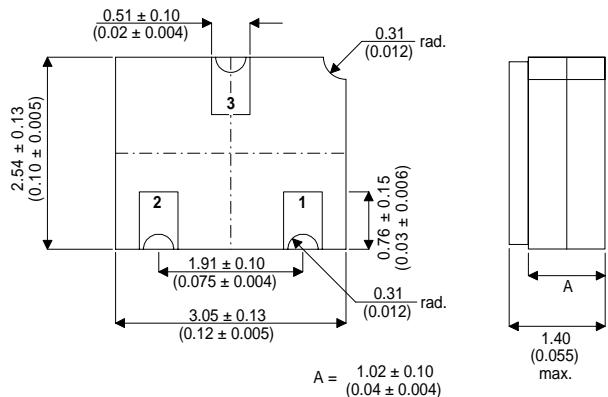

**SOT23 CERAMIC  
(LCC1 PACKAGE)**

**Underside View**

PAD 1 – Source

PAD 2 – Drain

PAD 3 – Gate

#### FEATURES

- HERMETIC CERAMIC SURFACE MOUNT PACKAGE (SOT23 COMPATIBLE)
- CECC SCREENING OPTIONS
- SPACE QUALITY LEVELS OPTIONS

#### APPLICATIONS:

Hermetically sealed surface mount version of the popular 2N4392 for high reliability / space applications requiring small size and low weight devices.

#### ABSOLUTE MAXIMUM RATINGS ( $T_{amb} = 25^\circ\text{C}$ unless otherwise stated)

$V_{DS}$	Drain – Source Voltage	40V
$V_{DG}$	Drain – Gate Voltage	40V
$V_{GS}$	Gate – Source Voltage	40V
$I_G$	Forward Gate Current	50mA
$P_D$	Power Dissipation @ $T_A = 25^\circ\text{C}$	500mW
	Derate above $25^\circ\text{C}$	2.85mW / $^\circ\text{C}$
$T_J, T_{STG}$	Operating Junction and Storage Temperature Range	-65 to +175°C



**SEME  
LAB**

**2N4392CSM**

**ELECTRICAL CHARACTERISTICS** ( $T_{amb} = 25^\circ C$  unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{(BR)GSS}$	Gate – Source Breakdown Voltage	$V_{DS} = 0$	$I_G = 1\mu A$	40	V
$V_{GS}$	Gate – Source Voltage	$V_{DS} = 20V$	$I_D = 1nA$	-2	
$V_{GS(f)}$	Gate – Source Forward Voltage	$V_{DS} = 0$	$I_G = 1mA$	1	
$I_{GSS}$	Gate Reverse Current	$V_{DS} = 0$	$V_{GS} = 20V$	0.1	
$I_{D(off)}$	Drain Cut-off Current	$V_{DS} = 20V$	$V_{GS} = -7V$	0.1	nA
$I_{DSS^*}$	Zero Gate Voltage Drain Current	$V_{DS} = 20V$	$V_{GS} = 0$	25	
$V_{DS(on)}$	Drain – Source On Voltage	$V_{GS} = 0$	$I_D = 6mA$	0.4	V
$R_{DS(on)}$	Drain – Source On Resistance	$V_{GS} = 0$	$I_D = 1mA$	60	$\Omega$
$C_{ISS}$	Input Capacitance	$V_{DS} = 20V$	$V_{GS} = 0$	14	pF
$C_{RSS}$	Reverse Transfer Capacitance#	$f = 1MHz$	$V_{GS} = -7V$	3.5	
$R_{DS(on)}$	Static Drain – Source On Resistance	$V_{GS} = 0$	$I_D = 1mA$	60	$\Omega$
$t_r$	Rise Time	$I_{D(on)} = 6mA$		5	ns
$t_f$	Fall Time	$V_{GS(off)} = 7V$		20	
$t_{on}$	Turn-On Time	$I_{D(on)} = 6mA$		15	
$t_{off}$	Turn-Off Time	$V_{GS(off)} = 7V$		35	