


 1 Form A/1 Form B  
 Solid State Relay

## DESCRIPTION

The AD4C333 is composed of two isolated relays; one normally open and one normally closed. Each relay has a bi-directional, single-pole, single-throw contact. Completely independent of its counterpart, each consists of an LED driver that activates an integrated circuit, which in turn drives a pair of DMOS transistors. These transistors are protected with free-wheeling diodes that can handle up to 1.5A of inrush current, making the relay ideal for switching lamps and highly inductive loads.

## FEATURES

- High input-to-output isolation
- Low input control power consumption
- 220mA maximum continuous load current
- 10 ohms maximum on-resistance
- Long life/high reliability

## APPLICATIONS

- Telecom switching
- Tip/Ring control
- PCMCIA modules
- Multiplexers
- Meter reading systems
- Data acquisition
- Medical equipment
- Battery monitoring
- Home/Safety security systems

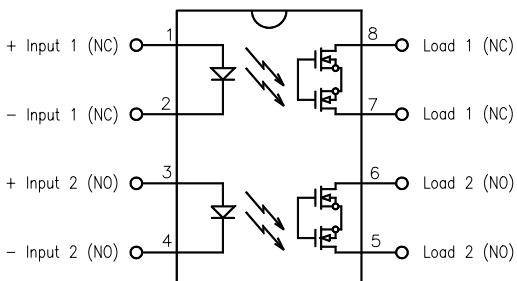
## OPTIONS/SUFFIXES

- -S Surface Mount Option
- -TR Tape and Reel

## MAXIMUM RATINGS

PARAMETER	UNIT	MIN	TYP	MAX
Storage Temperature	°C	-55		125
Operating Temperature	°C	-40		85
Continuous Input Current	mA			40
Transient Input Current	mA			400
Reverse Input Control Voltage	V	6		
Output Power Dissipation	mW			500

## SCHEMATIC DIAGRAM



## APPROVALS

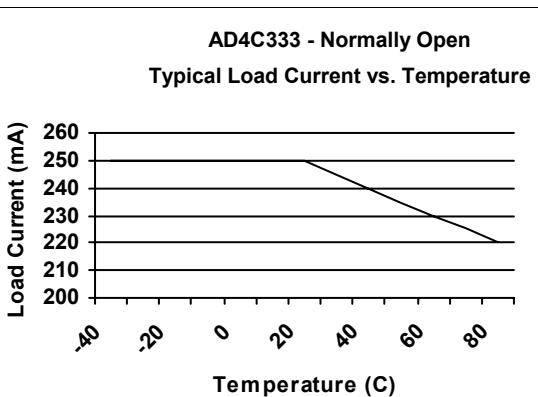
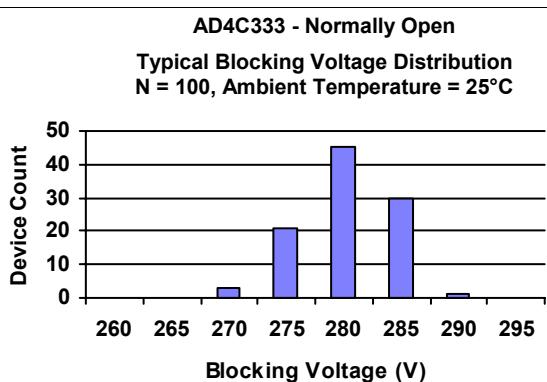
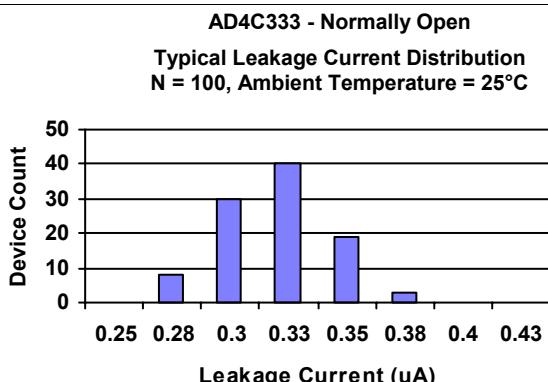
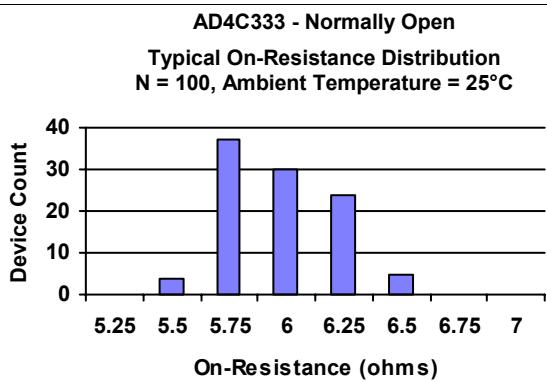
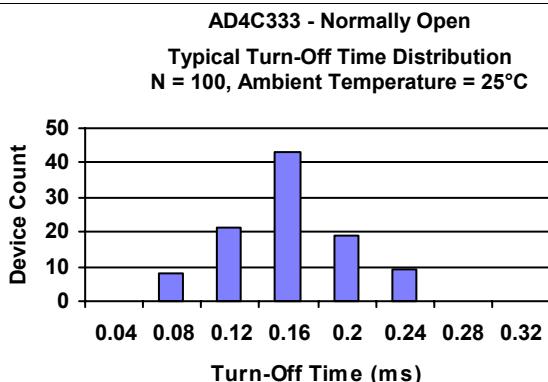
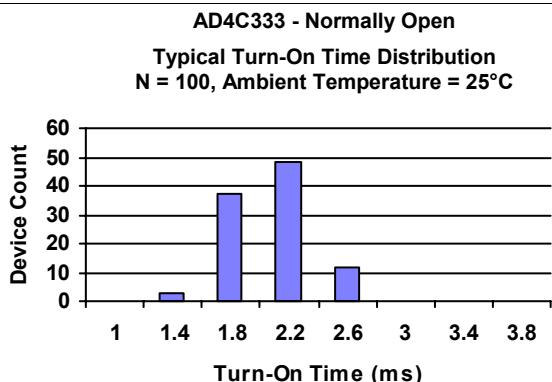
- BABT PENDING
- CSA CERTIFICATE #LR111581-1
- UL FILE #E90096








 1 Form A/1 Form B  
 Solid State Relay

**ELECTRICAL CHARACTERISTICS - 25°**

PARAMETER	UNIT	MIN	TYP	MAX	TEST CONDITIONS
<b>INPUT SPECIFICATIONS</b>					
LED Forward Voltage	V		1.2	1.5	If = 10mA
LED Reverse Voltage	V	6	12		Ir = 10uA
Turn-On Current (Form A)	m A	5	2.5		Io = 220mA
Turn-On Current (Form B)	m A		0.5		Io = 220mA
Turn-Off Current (Form A)	m A		0.5		
Turn-Off Current (Form B)	m A	5	2.5		
<b>OUTPUT SPECIFICATIONS (NORMALLY OPEN)</b>					
Blocking Voltage	V	250			10uA
Continuous Load Current	m A		220		If = 5mA
On-Resistance	Ω		6	10	Io = 220mA
Leakage Current	μ A		0.2	10	Vo = 250V
Output Capacitance	p F		25	50	Vo = 25V, f = 1.0MHz
Offset Voltage	m V			0.2	If = 5mA
Turn-On Time	m s		2	5	If = 5mA, Io = 220mA
Turn-Off Time	m s		0.1	0.5	If = 5mA, Io = 220mA
<b>OUTPUT SPECIFICATIONS (NORMALLY CLOSED)</b>					
Blocking Voltage	V	250			Io = 10mA, If = 5mA
Continuous Load Current	m A		220		If = 0mA
On-Resistance	Ω		6	10	Io = 220mA
Leakage Current	μ A		0.2	10	Vo = 250V, If = 5mA
Output Capacitance	p F		20	60	Vo = 25V, f = 1.0MHz
Offset Voltage	m V			0.2	
Turn-On Time	m s		0.2	1	If = 0mA, Io = 220mA
Turn-Off Time	m s		2	5	If = 0mA, Io = 220mA
<b>COUPLED SPECIFICATIONS</b>					
Isolation Voltage	V	2500			T = 1 minute
-H Suffix	V	3750			T = 1 minute
Isolation Resistance	G Ω	100			
Coupled Capacitance	p F			2	
Contact Transient Ratio	V / μ s	2000	7000		dV = 50V


 1 Form A/1 Form B  
 Solid State Relay

**PERFORMANCE DATA**

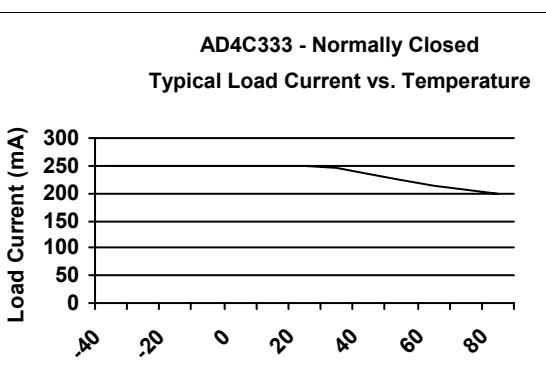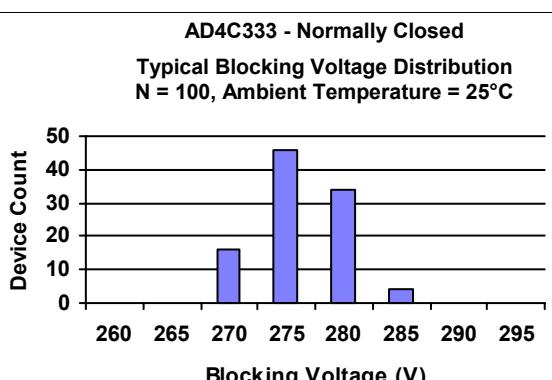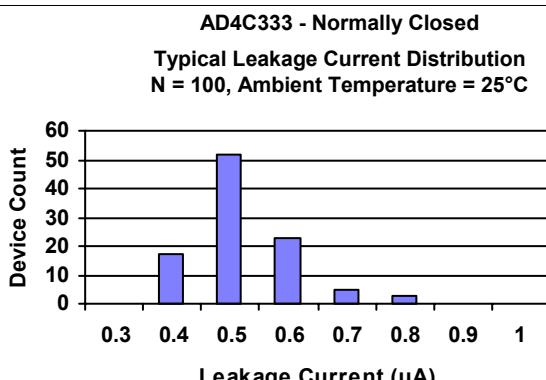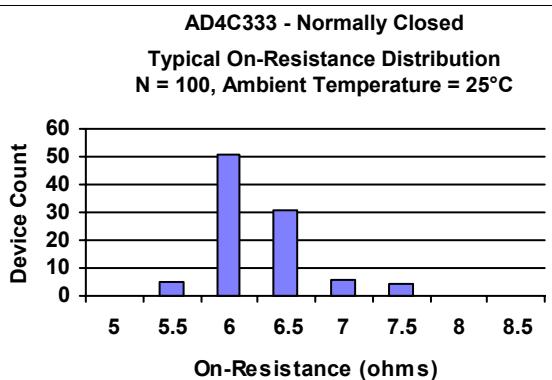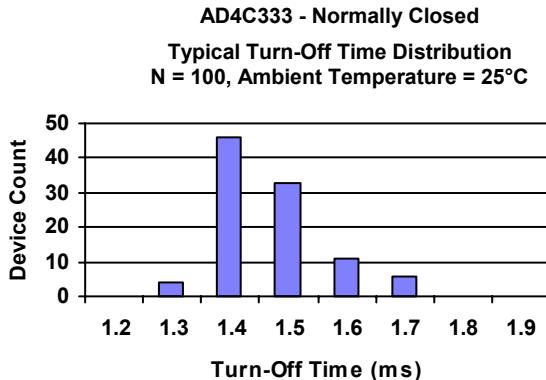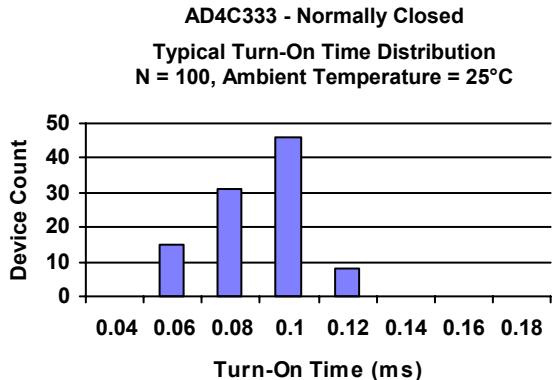
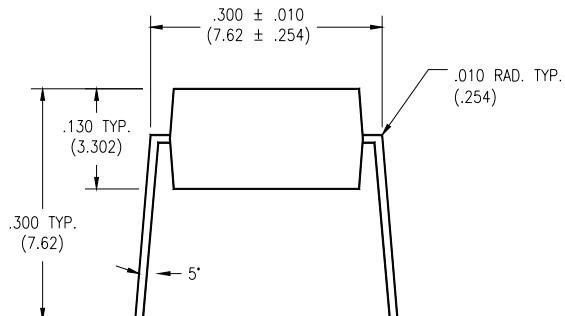

 1 Form A/1 Form B  
 Solid State Relay




1 Form A/1 Form B  
Solid State Relay


### MECHANICAL DIMENSIONS
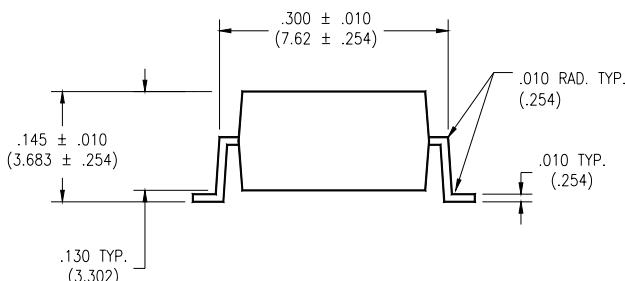
#### 8 PIN DUAL IN-LINE PACKAGE




END VIEW


#### 8 PIN SURFACE MOUNT DEVICE




END VIEW

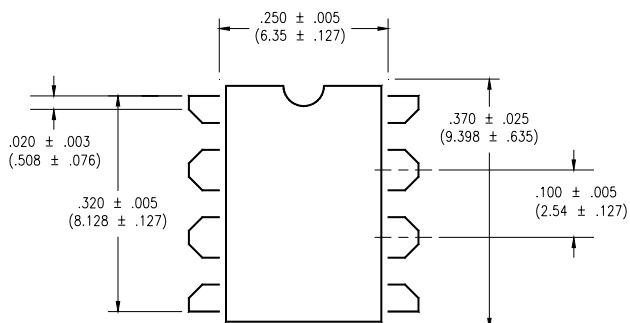


TOP VIEW

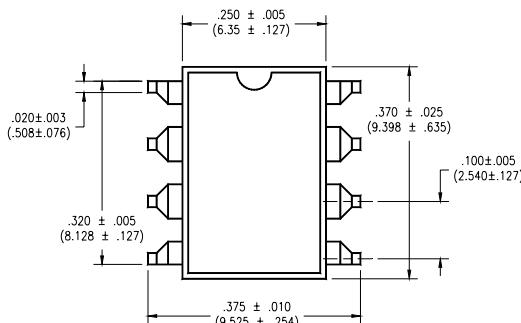

TOP VIEW

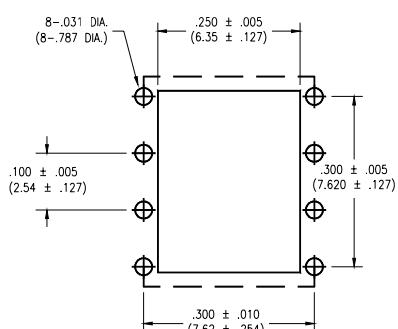

BOTTOM VIEW/  
BOARD PATTERN

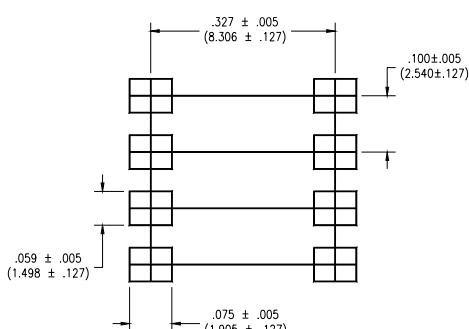

BOTTOM VIEW/  
BOARD PATTERN