

LOW EMI SPREAD SPECTRUM CRYSTAL CLOCK OSCILLATORS

ASSO

FEATURES:


- Integrated Spread Spectrum technology
- Standard TTL or HCMOS output.
- Meets jitter requirements for all major CISC, RISC and DSP processors
- Frequency Range of 15 to 120 MHz @ 5.0 VDC.
- Frequency Range of 15 to 90 MHz @ 3.3 VDC.

APPLICATIONS:


- Medical
- Printers
- Scanners
- Modems
- Telecommunications
- Aerospace
- Copier
- Automotive

ADDITIONAL BENEFITS:

- Reduce emissions up to 20 dB.
- Systemic approach to EMI.
- Highly cost effective compared to other methods.
- Eliminate need for individual node suppression.
- Eliminate need for expensive shielding.
- Reduce component count.
- Reduce PCB layer count.
- Drop-in replacement for 14 pin DIP packages.

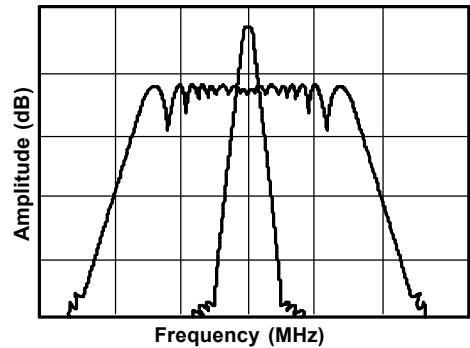

MECHANICAL DIMENSIONS:

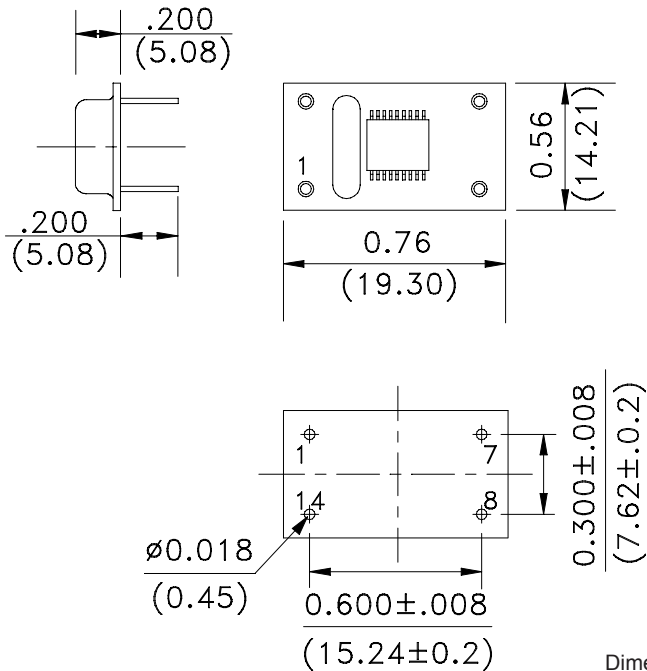

Dimensions: Inches (mm)

PIN CONFIGURATION:

Pin Number	Function
1	NC
7	GND
8	OUTPUT
14	VDC

Table 1

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED

NOTE: Left blank if standard • All specifications and markings subject to change without notice

29 Journey • Aliso Viejo, CA 92656 • USA

(949) 448-7070 • FAX: (949) 448-8484

E-MAIL: abinfo@abracon.com • INTERNET ADDRESS: www.abracon.com

ABRACON

CORPORATION

05/2003

LOW EMI SPREAD SPECTRUM CRYSTAL CLOCK OSCILLATORS

ASSO

Table 2

STANDARD ELECTRICAL SPECIFICATIONS			
PARAMETER	ASSO		Conditions
Operating Temperature (Topr)	0°C to +70°C		
Storage Temperature (Tsto)	- 65°C to +150°C		
Frequency Stability vs. Temp (dF/Fo)	±100ppm max. (See Options)		
Operating Supply Voltage (VDC)	3.3 VDC	5.0 VDC	+/-5 %
Frequency Range (Fo)	15 – 90 MHz	15 – 120 MHz	
Operating Input Current (IDD)	40 mA max	75 mA	F = 90 MHz
Duty Cycle	45/55	45/55	% max
Output Voltage (VOH/VOL)	2.4 VDC min.	4.0 VDC min.	
Rise Time	5.0 typ.	3.5 typ.	Load =15 pF, 10 – 90%
Fall Time	3.2 typ.	2.3 typ.	Load =15 pF, 10 – 90%
Start-up Time	10 ms max. 3 ms typ.		
Aging	+/- 5ppm max. /year		
Jitter	500 ps. max.		0°C to +70°C
Output Load	10-LSTTL or 15 pF		
Modulation Frequency (Fm)	20 – 40 kHz		15 – 120 MHz


Download Spread Spectrum Clocking application note on Abracon website at www.abracon.com/emi/ssc.

Table 3

FACTORY BANDWIDTH SELECTION (±10%)	
BANDWIDTH %	Center Spread
± 0.625	C1
± 1.25	C2
± 2.50	C3
± 5.00	C4

ORDERING OPTION

ASSO - FREQUENCY - FREQ. STABILITY - BANDWIDTH

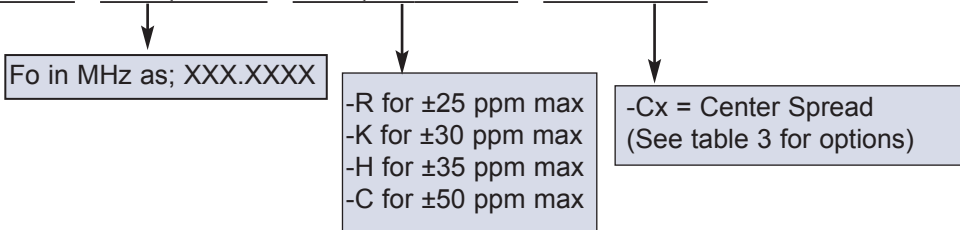

Example: ASSO-048.0000-C-C4

Would be the part number for a 48.0000 MHz, ±5.0% center spread with a +/-50 ppm center frequency accuracy.

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED

Rev. 2.4

NOTE: Left blank if standard • All specifications and markings subject to change without notice

29 Journey • Aliso Viejo, CA 92656 • USA
(949) 448-7070 • Fax: (949) 448-8484

E-MAIL: abinfo@abracon.com • INTERNET ADDRESS: www.abracon.com



05/2003