

100 Watts

AK45C-20/ AV45C-20

High Efficiency



Total Power: 100 Watts
Input Voltages: 48V
No. of Outputs: Single

Special Features

- High efficiency
- Industry standard package
1.45" x 2.28" x 0.5"
- High capacitive load limit on start-up
- Industry Standard features: UVLO, OVP, OCP, OTP, Output Enable, Differential Remote Sense
- Regulation to zero load
- Fixed frequency switching
- Basic insulation

Environmental

Operating case temperature range:
-40°C to +100°C

Storage temperature: -55°C to +105°C

Overtemperature protection: 110°C typical

MTBF: > 1 million hours

Safety

AK45C:

UL,cUL 1950
TUV EN60950
Basic Insulation

AV45C:

UL 1950
CSA 22.2-950-95
TUV EN60950
Operational Insulation

Electrical Specs

Input

Input Range	36 to 75 VDC
Input Surge	100V /100ms
Efficiency	5V @ 89% Typ 3.3V @ 86% Typ 2.5V @ 84% Typ

Output

Load Regulation	0.2% typical down to no load (output 5V and above) 10mV typical down to no load (output below 5V)
Line Regulation	0.1% typical (output 5V and above) 10mV typical (output below 5V)
Voltage Tolerance	±1%
Noise/Ripple	100mV max typ
Remote sense	Up to 0.5V
Transient Response	5% max deviation with 25% to 75% full (output 5V and above) 200mV (output below 5V) 500µs (max) recovery
Overvoltage Protection	130% nominal output (output 5V and above) 160% nominal output (1.8V and 2V) 140% nominal output (3.3V output)
Current Limit	115% nominal output
Switching Frequency	375kHz (typ)

Control

Voltage Adjust	90 to 110% Vo (1.8 V) 80 to 110% Vo (2.5, 3.3, 5 V)
Enable	TTL compatible (Positive or Negative enable options)

AMERICAS

5810 Van Allen Way
 Carlsbad, CA 92008
 Telephone: 760-930-4600
 Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX, UK
 Telephone: 44 (1384) 842-211
 Facsimile: 44 (1384) 843-355

ASIA

Units 2111-2116, Level 21
 Tower1, Metroplaza
 223, Hing Fong Road
 Fwai Fong, New Territories
 Hong Kong
 Telephone: 852-2437-9662
 Facsimile: 852-2402-4426



AK45C/AV45C

Ordering Information

Input Voltage	Output Voltage	Output Current	Efficiency ²	Model Number
48V	1.5V	20A	85% Min	AV45C-048L-015F20HA (N) - (6)(8)
48V	1.8V	20A	85% Min	AV45C-048L-050F20HA (N) - (6)(8)
48V	3.3V	20A	89% Min	AV45C-048L-050F20HA (N) - (6)(8)
48V	5V	20A	90% Min	AV45C-048L-050F20HA (N) - (6)(8)
48V	1.8V	20A	81% min (84% typ)	AK45C-048L-018F20HA (N) - (6)(8)
48V	2.5V	20A	84% min (86% typ)	AK45C-048L-025F20HA (N) - (6)(8)
48V	3.3V	20A	86% min (88% typ)	AK45C-048L-033F20HA (N) - (6)(8)
48V	3.3V	20A	86% min (88% typ)	AK45C-048L-033F20HAN-6T ⁷

OPTIONS:

- "N" = designates Negative Logic Enable (default is Positive Enable with no suffix "N" required)
- "-6" = designates 3.7mm pin length (default pin length is 5mm with no suffix required)
- "-8" = designates 2.8mm pin length


Pin Assignments

Single Output

- +Vin
- No Pin
- Enable
- No Pin
- VIN
- Vout
- Sense
- Trim
- +Sense
- +Vout

Notes:

- 20 MHz bandwidth. External 10 uF tant. capacitor in parallel with 1 uF ceramic capacitor placed across the output and secondary return ground.
- Efficiency measurements are typical values taken at full load, nominal line and T_A = 25°C.
- All specifications are typical at nominal line, full load and T_A = 25°C unless otherwise noted.
- All specifications subject to change without notice.
- Mechanical drawings are for reference only. Dimensions are in inches [millimeters]. Pin placement tolerance ± 0.005 [0.127]. Mechanical Tolerance ± 0.02 [0.5]. ∅ = 0.060" for Pins 6&10, the rest are ∅ = 0.040".
- Technical Reference Notes should be consulted for detailed information when available.
- Tuned model for specific application.
- Warranty 1yr.

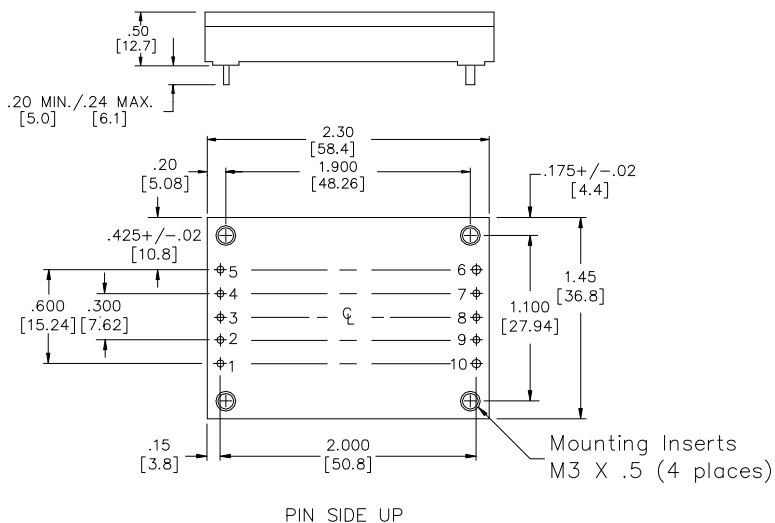

Astec Industry Standard

Astec reserves the right to make changes to the information contained herein without notice and assumes no liability as a result of its use and application. (REV 02: OCTOBER 28, 2004)