


MECHANICAL DATA

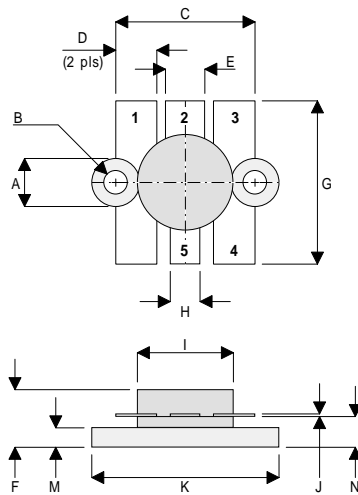

DT

PIN 1 SOURCE (COMMON) PIN 2 GATE
 PIN 3 SOURCE (COMMON) PIN 4 SOURCE (COMMON)
 PIN 5 DRAIN

| DIM | mm | Tol. | Inches | Tol. |
|-----|----------|------|-----------|-------|
| A | 6.35 DIA | 0.13 | 0.250 DIA | 0.005 |
| B | 3.17 DIA | 0.13 | 0.125 DIA | 0.005 |
| C | 18.41 | 0.25 | 0.725 | 0.010 |
| D | 5.46 | 0.13 | 0.215 | 0.005 |
| E | 5.21 | 0.13 | 0.205 | 0.005 |
| F | 7.62 | MAX | 0.300 | MAX |
| G | 21.59 | 0.38 | 0.850 | 0.015 |
| H | 3.94 | 0.13 | 0.155 | 0.005 |
| I | 12.70 | 0.13 | 0.500 | 0.005 |
| J | 0.13 | 0.03 | 0.005 | 0.001 |
| K | 24.76 | 0.13 | 0.975 | 0.005 |
| M | 2.59 | 0.13 | 0.102 | 0.005 |
| N | 4.06 | 0.25 | 0.160 | 0.010 |

**GOLD METALLISED
 MULTI-PURPOSE SILICON
 DMOS RF FET
 60W – 28V – 175MHz
 SINGLE ENDED**

FEATURES

- SIMPLIFIED AMPLIFIER DESIGN
- SUITABLE FOR BROAD BAND APPLICATIONS
- LOW C_{rss}
- SIMPLE BIAS CIRCUITS
- LOW NOISE
- HIGH GAIN – 16 dB MINIMUM

APPLICATIONS

- HF/VHF COMMUNICATIONS
 from 1 MHz to 175 MHz

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

| | | |
|--------------|--|-------------------------|
| P_D | Power Dissipation | 117W |
| BV_{DSS} | Drain – Source Breakdown Voltage | 70V |
| BV_{GSS} | Gate – Source Breakdown Voltage | $\pm 20V$ |
| $I_{D(sat)}$ | Drain Current | 15A |
| T_{stg} | Storage Temperature | -65 to $150^{\circ}C$ |
| T_j | Maximum Operating Junction Temperature | $200^{\circ}C$ |

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

| Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|---|--|------|------|------|---------|
| BV_{DSS} Drain-Source Breakdown Voltage | $V_{GS} = 0$ $I_D = 100mA$ | 70 | | | V |
| I_{DSS} Zero Gate Voltage Drain Current | $V_{DS} = 28V$ $V_{GS} = 0$ | | | 3 | mA |
| I_{GSS} Gate Leakage Current | $V_{GS} = 20V$ $V_{DS} = 0$ | | | 1 | μA |
| $V_{GS(th)}$ Gate Threshold Voltage * | $I_D = 10mA$ $V_{DS} = V_{GS}$ | 1 | | 7 | V |
| g_{fs} Forward Transconductance * | $V_{DS} = 10V$ $I_D = 3A$ | 2.4 | | | S |
| G_{PS} Common Source Power Gain | $P_O = 60W$ | 16 | | | dB |
| η Drain Efficiency | $V_{DS} = 28V$ $I_{DQ} = 0.3A$ | 50 | | | % |
| VSWR Load Mismatch Tolerance | $f = 175MHz$ | 20:1 | | | — |
| C_{iss} Input Capacitance | $V_{DS} = 28V$ $V_{GS} = -5V$ $f = 1MHz$ | | | 180 | pF |
| C_{oss} Output Capacitance | $V_{DS} = 28V$ $V_{GS} = 0$ $f = 1MHz$ | | | 90 | pF |
| C_{rss} Reverse Transfer Capacitance | $V_{DS} = 28V$ $V_{GS} = 0$ $f = 1MHz$ | | | 7.5 | pF |

* Pulse Test: Pulse Duration = 300 μs , Duty Cycle $\leq 2\%$

HAZARDOUS MATERIAL WARNING

The ceramic portion of the device between leads and metal flange is beryllium oxide. Beryllium oxide dust is highly toxic and care must be taken during handling and mounting to avoid damage to this area.

THESE DEVICES MUST NEVER BE THROWN AWAY WITH GENERAL INDUSTRIAL OR DOMESTIC WASTE.

THERMAL DATA

| | | |
|----------------|------------------------------------|----------------|
| $R_{THj-case}$ | Thermal Resistance Junction – Case | Max. 1.5°C / W |
|----------------|------------------------------------|----------------|