


120 Amp Schottky Rectifier

HS12380—HS123100

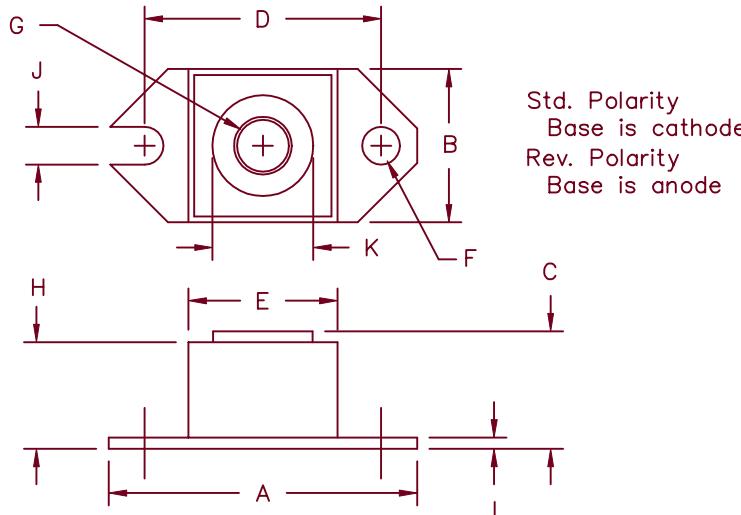

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.52	1.56	38.86	39.62	
B	.725	.775	18.42	19.69	
C	.605	.625	15.37	15.88	
D	1.182	1.192	30.02	30.28	
E	.745	.755	18.92	19.18	Sq.
F	.152	.160	3.86	4.06	Dia.
G			1/4-20 UNC-2B		
H	.570	.580	14.49	14.73	
J	.156	.160	3.96	4.06	
K	.495	.505	12.57	12.83	
L	.120	.130	3.05	3.30	Dia.

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
HS12380*	80V	80V
HS12390*	90V	90V
HS123100*	100V	100V

*Add Suffix R for Reverse Polarity

- Schottky Barrier Rectifier
- Guard Ring Protection
- 120 Amperes/80 to 100 Volts
- 175°C Junction Temperature
- Reverse Energy Tested

Electrical Characteristics

Average forward current
Maximum surge current
Maximum repetitive reverse current
Max peak forward voltage
Max peak forward voltage
Max peak reverse current
Max peak reverse current
Typical junction capacitance

|F(AV) 120 Amps
|FSM 2000 Amps
|R(OV) 2 Amps
VFM .76 Volts
VFM 0.91 Volts
|RM 75 mA
|RM 3.0 mA
C_J 3000 pF

T_C = 112°C, Square wave, R_{θJC} = 0.40°C/W
8.3ms, half sine, T_J = 175°C
f = 1 KHZ, 25°C, 1 μsec square wave
|FM = 120A: T_J = 125°C*
|FM = 120A: T_J = 25°C*
V_{RRM}, T_J = 125°C*
V_{RRM}, T_J = 25°C
V_R = 5.0V, T_C = 25°C

*Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operating junction temp range
Max thermal resistance per leg
Typical thermal resistance (greased)
Terminal Torque
Mounting Base Torque
Weight

T_{STG}
T_J
R_{θJC}
R_{θCS}

-55°C to 175°C
-55°C to 175°C
0.40°C/W Junction to case
0.12 °C/W Case to sink
35–40 inch pounds
20–25 inch pounds
1.1 ounces (32 grams) typical

HS12380 - HS123100

Figure 1
Typical Forward Characteristics

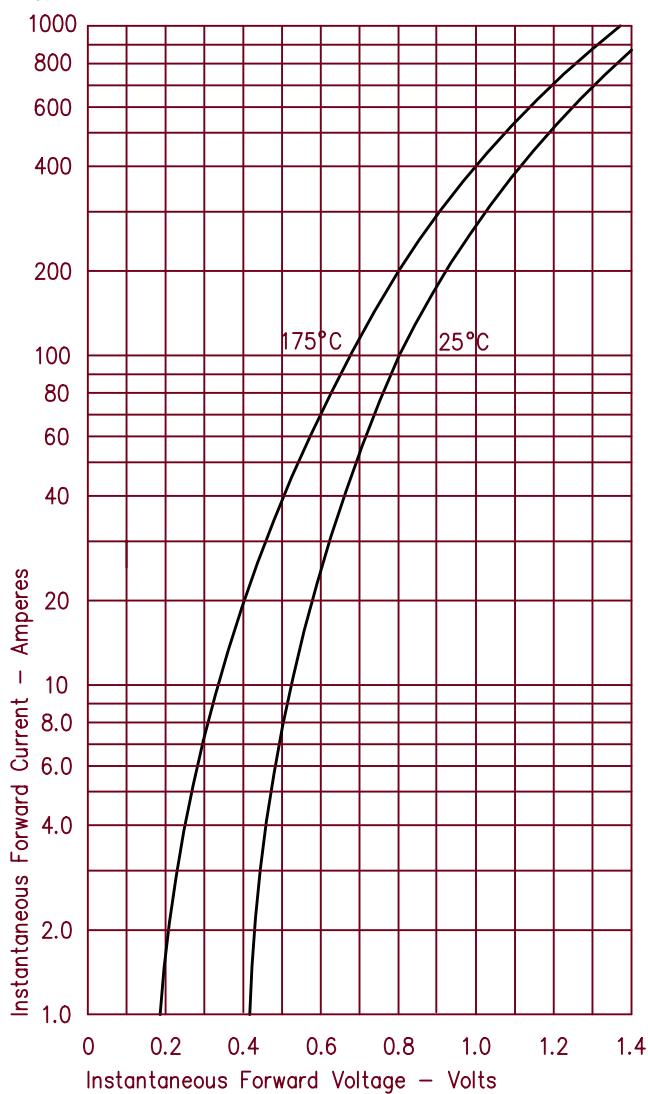


Figure 3
Typical Junction Capacitance

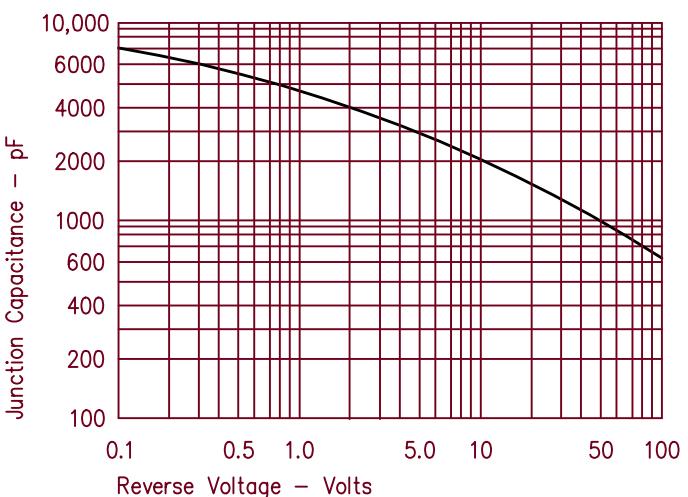


Figure 4
Forward Current Derating

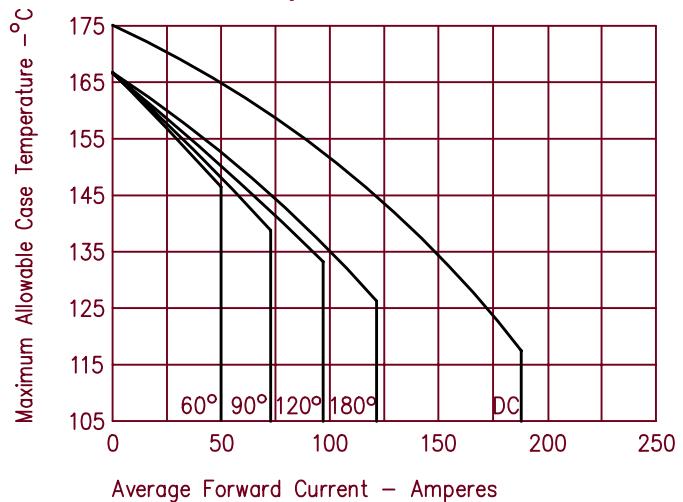


Figure 2
Typical Reverse Characteristics

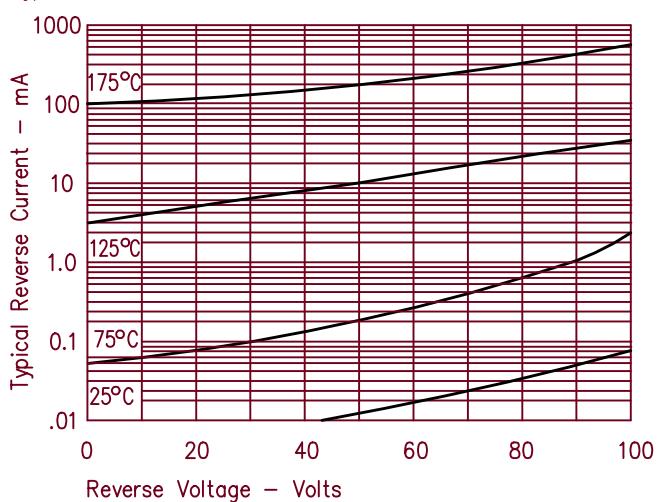


Figure 5
Maximum Forward Power Dissipation

