



SAW Components

Data Sheet K 3565 M

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe with circuitry patterns, suggesting a global network or technological theme. The overall color scheme is dark with blue and white highlights.



SAW Components

K 3565 M

IF Filter for Quasi/Split Sound Applications

38,90 MHz

Data Sheet

Standard

- B/G
- D/K


Features

- TV IF filter for quasi/split sound applications (separate picture and sound channel)
- Picture channel with Nyquist slope and sound suppression, symmetrical output
- Customized group delay predistortion
- Sound channel with pass band for sound carriers between 32,4 MHz and 33,4 MHz

Terminals

- Tinned CuFe alloy


Plastic package SIP5K

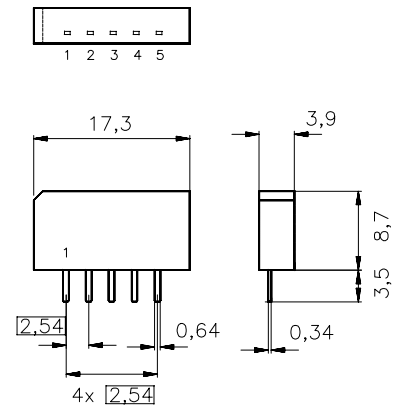

Dimensions in mm, approx. weight 1,0 g

Pin configuration

- 1 Input
- 2 Chip carrier - ground
- 3 Output - sound
- 4 Output - picture
- 5 Output - picture



Type	Ordering code	Marking and package according to	Packing according to
K 3565 M	B39389-K3565-M201	C61157-A1-A15	F61064-V8067-Z000

Maximum ratings

Operating temperature range	T_A	-25/+65	°C	
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	5	V	between any terminals
AC voltage	V_{pp}	10	V	between any terminals



SAW Components	K 3565 M
IF Filter for Quasi/Split Sound Applications	38,90 MHz

Data Sheet

Characteristics of picture channel

Reference temperature: $T_A = 25\text{ °C}$
Terminating source impedance: $Z_S = 50\ \Omega$
Terminating load impedance: $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
Insertion attenuation	α				
Reference level for the following data	37,40 MHz	12,9	14,4	15,9	dB
Relative attenuation	α_{rel}				
Picture carrier	38,90 MHz	4,8	5,8	6,8	dB
Color carrier	34,47 MHz	0,5	1,5	2,5	dB
Sound carrier	32,40 MHz	35,0	39,0	—	dB
	33,40 MHz	35,0	51,0	—	dB
Adjacent picture carrier	30,90 MHz	45,0	59,0	—	dB
	31,90 MHz	45,0	59,0	—	dB
Adjacent sound carrier	40,40 MHz	45,0	61,0	—	dB
	41,40 MHz	45,0	63,0	—	dB
Lower sidelobe	25,00 ... 30,90 MHz	39,0	46,0	—	dB
Upper sidelobe	41,40 ... 45,00 MHz	37,0	43,0	—	dB
Reflected wave signal suppression					
1,4 μ s ... 6,0 μ s after main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		42,0	51,0	—	dB
Feedthrough signal suppression					
1,2 μ s ... 1,1 μ s before main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		50,0	56,0	—	dB
Group delay predistortion	$\Delta\tau$				
(reference frequency 38,90 MHz)					
	35,90 MHz	—	-60	—	ns
	34,47 MHz	—	40	—	ns
Impedance at 37,40 MHz					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	1,2 $\parallel$ 24,2	—	k Ω $\parallel$ pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	2,0 $\parallel$ 4,0	—	k Ω $\parallel$ pF
Temperature coefficient of frequency	TC_f	—	-72	—	ppm/K



SAW Components

K 3565 M

IF Filter for Quasi/Split Sound Applications

38,90 MHz

Data Sheet

Characteristics of sound channel

Reference temperature:

$$T_A = 25\text{ °C}$$

Terminating source impedance:

$$Z_S = 50\ \Omega$$

Terminating load impedance:

$$Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$$

		min.	typ.	max.	
Insertion attenuation	α				
Reference level for the following data	33,40 MHz	15,4	16,9	18,4	dB
Relative attenuation	α_{rel}				
Sound carrier	32,40 MHz	-1,5	-0,5	0,5	dB
Picture carrier	38,90 MHz	30,0	34,0	—	dB
Color carrier	34,47 MHz	22,0	27,0	—	dB
Adjacent picture carrier	30,90 MHz	27,0	32,0	—	dB
	31,90 MHz	—	8,0	—	dB
Adjacent sound carrier	40,40 MHz	35,0	41,0	—	dB
	41,40 MHz	38,0	46,0	—	dB
Lower sidelobe	25,00 ... 30,90 MHz	25,0	31,0	—	dB
Upper sidelobe	38,90 ... 45,00 MHz	25,0	30,0	—	dB
Impedance at 33,40 MHz					
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	5,1 $\parallel$ 2,2	—	k Ω $\parallel$ pF
Temperature coefficient of frequency	TC_f	—	-72	—	ppm/K



SAW Components



K 3565 M

IF Filter for Quasi/Split Sound Applications

38,90 MHz

Data Sheet

Frequency response of picture channel

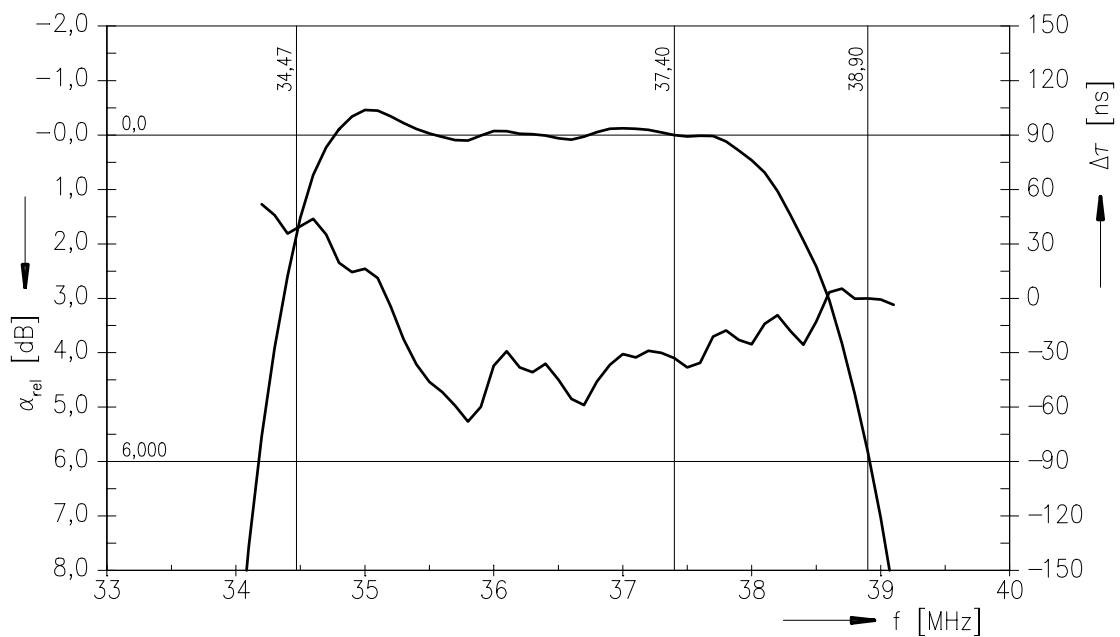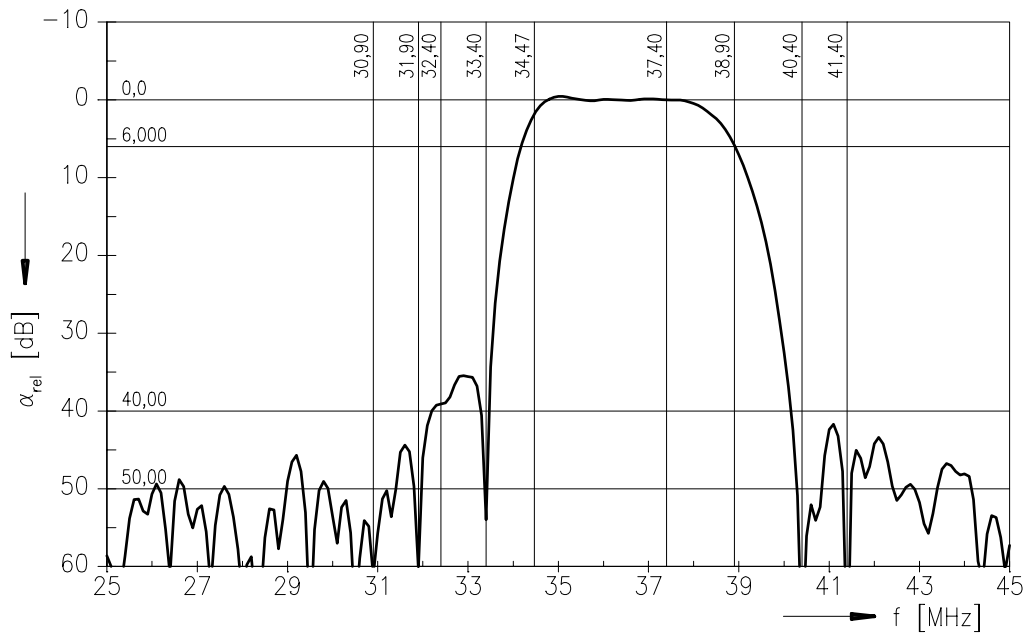



SAW Components


K 3565 M

IF Filter for Quasi/Split Sound Applications


38,90 MHz

Data Sheet

Frequency response of picture channel

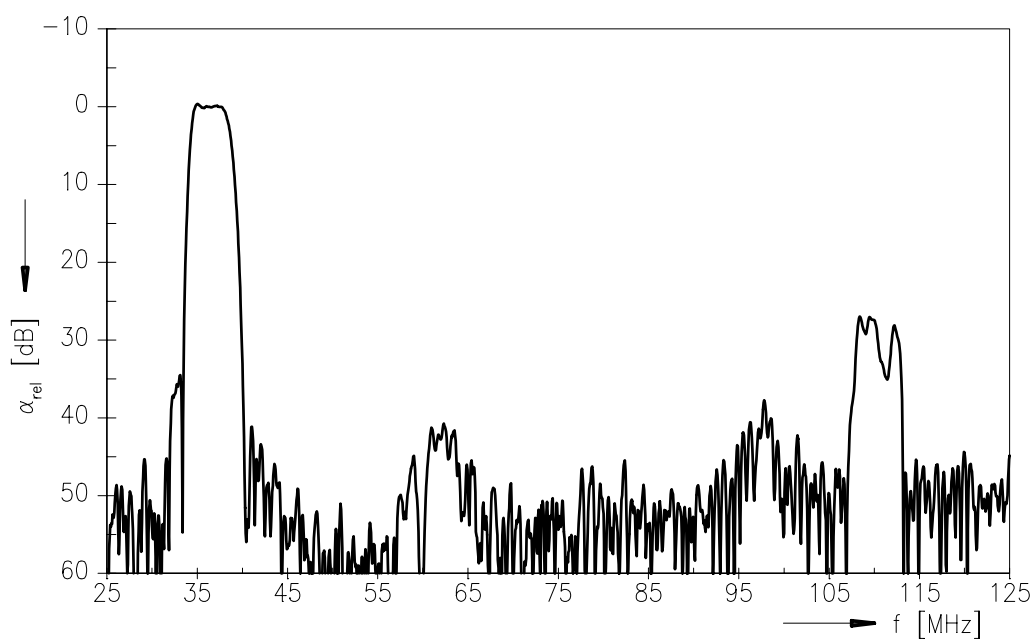

Time domain response of picture channel

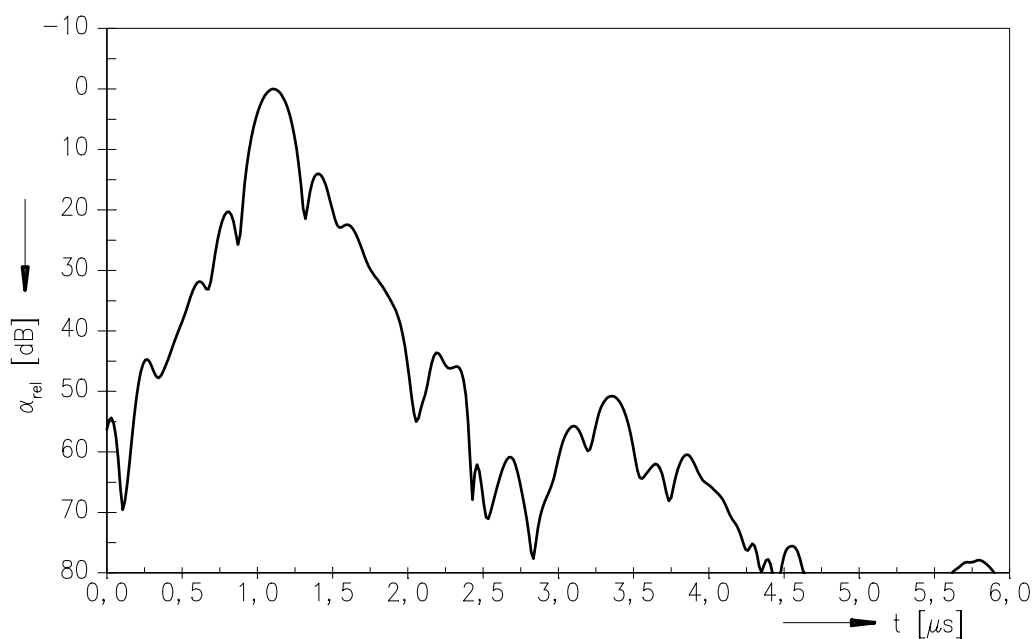



SAW Components


K 3565 M

IF Filter for Quasi/Split Sound Applications

38,90 MHz

Data Sheet

Frequency response of sound channel

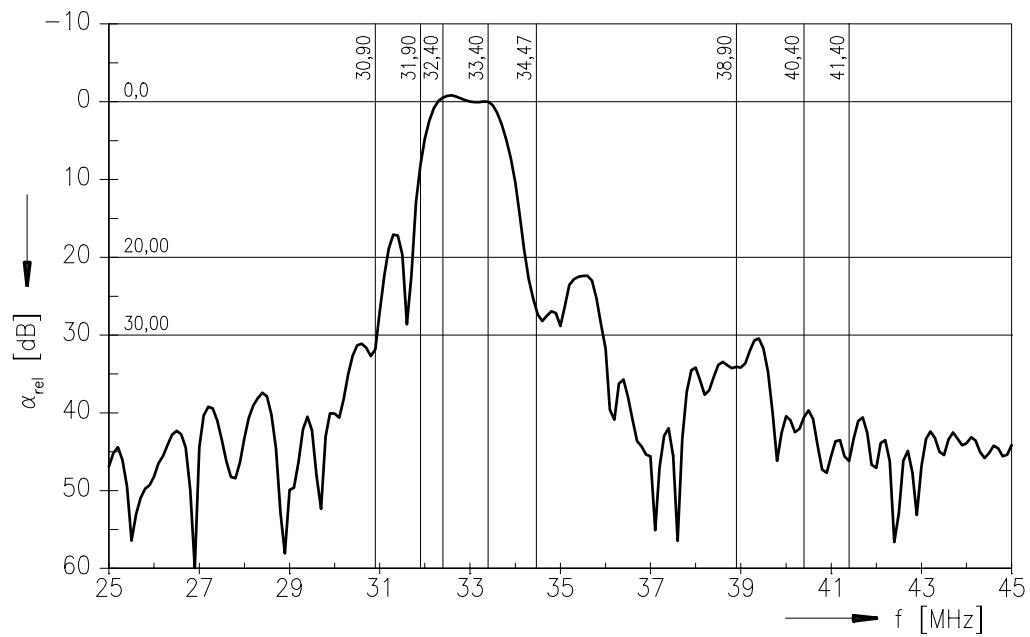



SAW Components	K 3565 M
IF Filter for Quasi/Split Sound Applications	38,90 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE MM PD

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.