


## MR3 Reflector Lamp Assemblies

Line No.	Part No.	Volts	Amps	M.S.C.P.	Life Hours	Filament Type	Vacuum or Gas	Reflector Finish	Drawing
1	1150-3	5.0	0.115	.150	40,000	CC-6	V	Polished Aluminum	A
2	1088-3	5.0	0.140	.200	18,000	CC-6	V	Polished Aluminum	A


Part number includes lamp, reflector, mounting clip and two 2-56 UNC mounting screws.

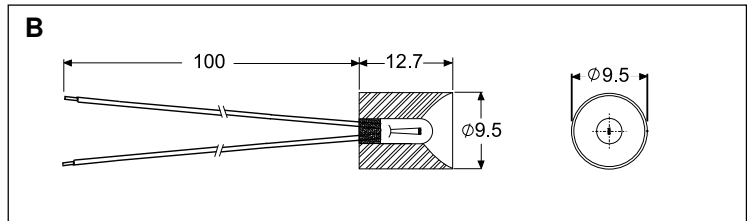

## MR3 Reflector Lamp Assemblies

Line No.	Part No.	Volts	Amps	M.S.C.P.	Life Hours	Filament Type	Vacuum or Gas	Reflector Finish	Drawing
3	MR3-4115	5.0	0.115	.150	40,000	CC-6	V	Polished Aluminum	B
4	MR3-1600	5.0	0.060	.050	100,000	CC-6	V	Polished Aluminum	B
5	MR3-1150	5.0	0.115	.150	40,000	CC-6	V	Polished Aluminum	B
6	MR3-1088	5.0	0.140	.200	18,000	CC-6	V	Polished Aluminum	B
7	MR3-1089	5.0	0.150	.350	5,000	CC-6	V	Polished Aluminum	B


These assemblies are also available with Gold Coated Reflector, Ellipsoidal Reflector or Custom Lead Length.

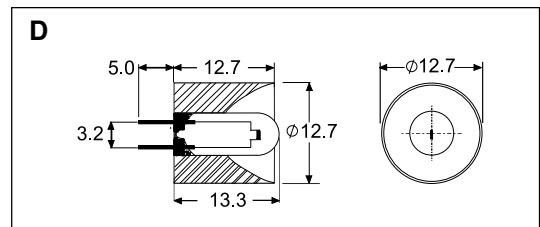

## MR4 Reflector Lamp Assemblies

Line No.	Part No.	Volts	Amps	M.S.C.P.	Life Hours	Filament Type	Vacuum or Gas	Reflector Finish	Drawing
13	MR4-187	4.2	1.05	3.98	650	C-6	G	Polished Aluminum	D
14	MR4-188	5.0	1.00	3.34	10,000	C-6	G	Polished Aluminum	D


These assemblies are also available with Gold Coated Reflector, Ellipsoidal Reflector or Custom Lead Length.

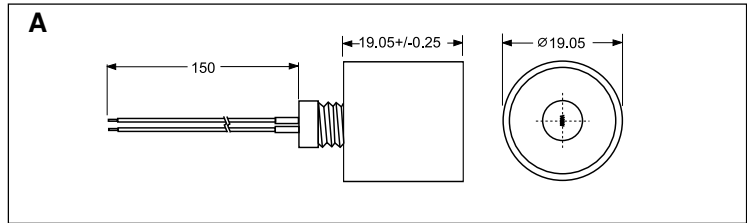

## MR6 Reflector Lamp Assemblies

Line No.	Part No.	Volts	Amps	M.S.C.P.	Life Hours	Filament Type	Vacuum or Gas	Reflector Finish	Drawing
1	MR6-187	4.2	1.05	3.98	650	C-6	G	Polished Aluminum	A
2	MR6-188	5.0	1.0	3.34	10,000	C-6	G	Polished Aluminum	A
3	MR6-288	6.0	1.0	7.96	100	C-6	G	Polished Aluminum	A

These assemblies are also available with Gold Coated Reflector, Ellipsoidal Reflector or Custom Lead Length.

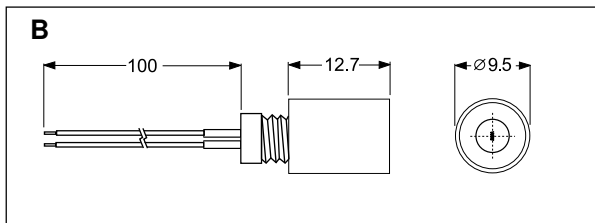

## Adjustable Focus Reflector Assemblies

Line No.	Part No.	Reflector Finish	Drawing
4	MR3-K	Polished Aluminum	B
5	MR3G-K	Gold Coated	B

• Threaded lamp holder and reflector allow for easy customization of focal distance.

• Adjustable beam from parallel beam to fully focused.

• Holder will accommodate any lamp with 1.27mm pin spacing.

• Gold Coated Reflector Assembly offers improved infrared output from 0.6 to 4.5 microns.



## Custom Reflector Assemblies

Gilway reflector assemblies can be customized to better fit your application. Please contact us with your unique requirements.