


## MT7183A-UR

### Features

High Intensity  
 IC Compatible  
 Low Current Requirements  
 Red Diffused Lens  
 Reliable and Rugged

### Maximum Ratings (Ta=25°C)

Characteristic	Symbol	Max.	Unit
Forward Current	I <sub>F</sub>	30	mA
Reverse Voltage	V <sub>R</sub>	4	V
Power Dissipation	P <sub>D</sub>	72.00	mW
Operating Temperature	T <sub>opr</sub>	-25 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +100	°C
Soldering Temperature	T <sub>sol</sub>	260	°C
Soldering Time	-	for 5 sec. max	-

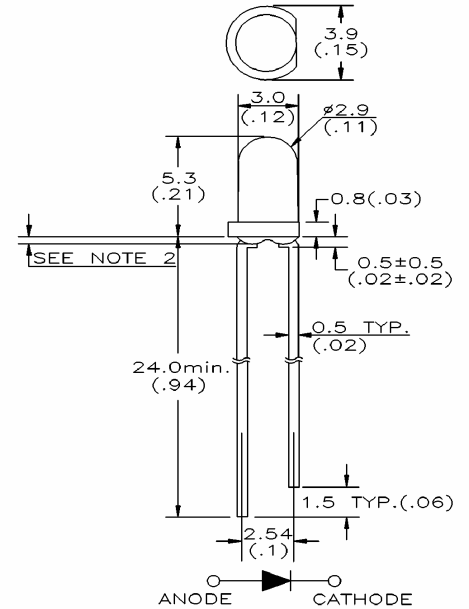

### Notes :

1. All dimensions are in millimeters (inches).
2. Protruded resin under flange is 1.0mm (.04" ) max.
3. Tolerance is ±0.25mm (0.01" ) unless otherwise noted.


### Opto-Electrical Characteristics (Ta=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	-	1.90	2.40	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =4V	-	-	100	μ A
Luminous Intensity	I <sub>v</sub>	I <sub>F</sub> =20mA	90.00	150.00	-	mcd
Viewing Angle	2θ <sup>1/2</sup>	-	-	25°	-	deg.
Peak Wavelength	λ <sub>p</sub>	I <sub>F</sub> =20mA	-	660	-	nm
Dominant Wavelength	λ <sub>d</sub>	I <sub>F</sub> =20mA	-	643	-	nm
Spectral Line Half Width	Δλ	I <sub>F</sub> =20mA	-	20	-	nm


Specification is subject to change without notice.

MT7183A-UR Graphs


Typical Electrical / Optical Characteristics Curves :

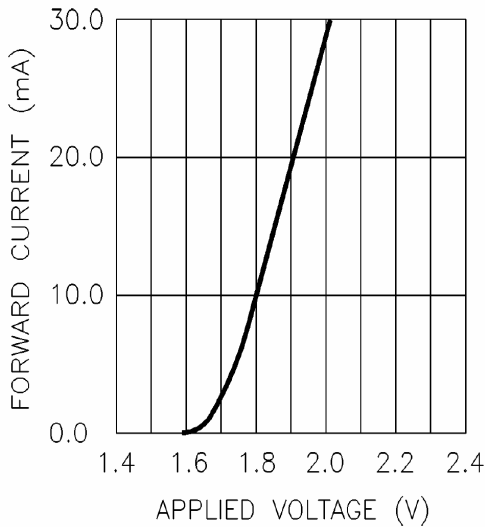


Forward Current vs. Forward Voltage

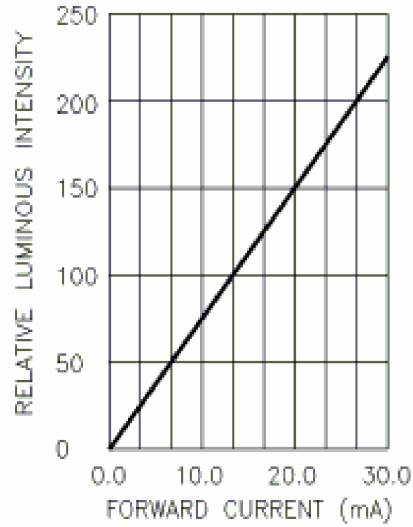

Forward Current vs.  
Relative Luminous Intensity

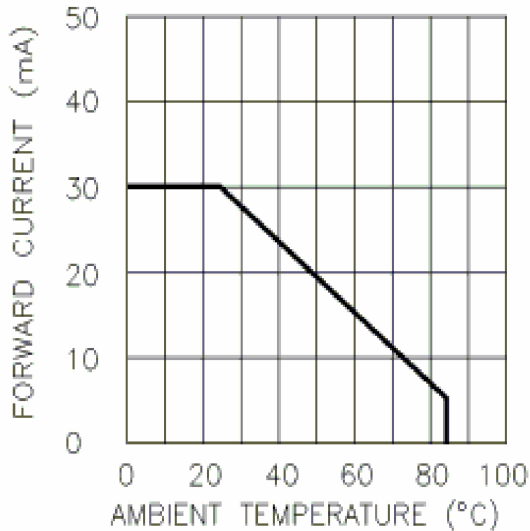

Ambient Temperature vs. Forward Current

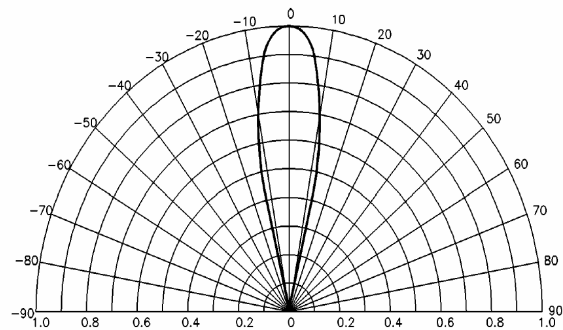

Radiation Diagram