

SHINDENGEN

3 Phase Bridge Diode

Diode Module

S10VT60

600V 10A

FEATURES

- Dual In-Line Package
- Compact 3 phase bridge
- High IFSM
- Applicable to mount on glass-epoxy substrate (VTA type)


APPLICATION

- Big Power Supply
- Air conditioner
- Factory Automation, Inverter

OUTLINE DIMENSIONS

Case : SVT

(Unit : mm)

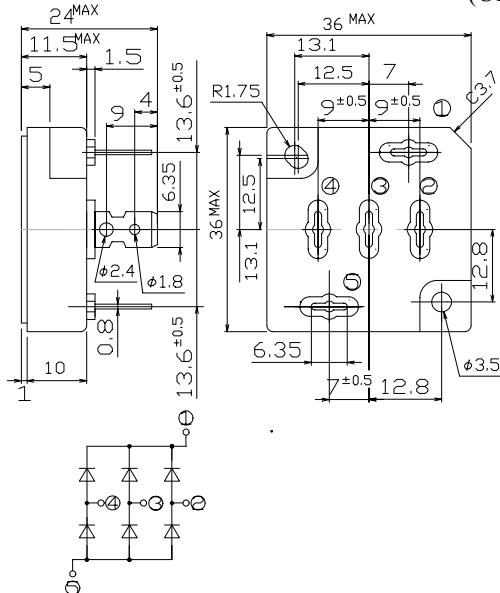

RATINGS

● Absolute Maximum Ratings (If not specified $T_c=25^\circ\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-40~150	$^\circ\text{C}$
Operating Junction Temperature	T_j		150	$^\circ\text{C}$
Maximum Reverse Voltage	V_{RM}		600	V
Average Rectified Forward Current	I_O	50Hz sine wave, R-load, With heatsink, $T_c=137^\circ\text{C}$	10	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1cycle peak value, Rating of per diode, $T_j=25^\circ\text{C}$	170	A
Current Squared Time	I^2t	$1\text{ms} \leq t < 10\text{ms}$ $T_c=25^\circ\text{C}$	110	A^2s
Dielectric Strength	V_{dis}	Terminals to case, AC 1 minute	2	kV
Mounting Torque	T_{OR}	(Recommended torque : 0.6N·m)	0.8	N·m


● Electrical Characteristics (If not specified $T_c=25^\circ\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=3.5\text{A}$, Pulse measurement, Rating of per diode	Max.1.05	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement, Rating of per diode	Max.10	μA
Thermal Resistance	θ_{jc}	junction to case	Max.0.65	$^\circ\text{C}/\text{W}$


S10VTx

Forward Voltage

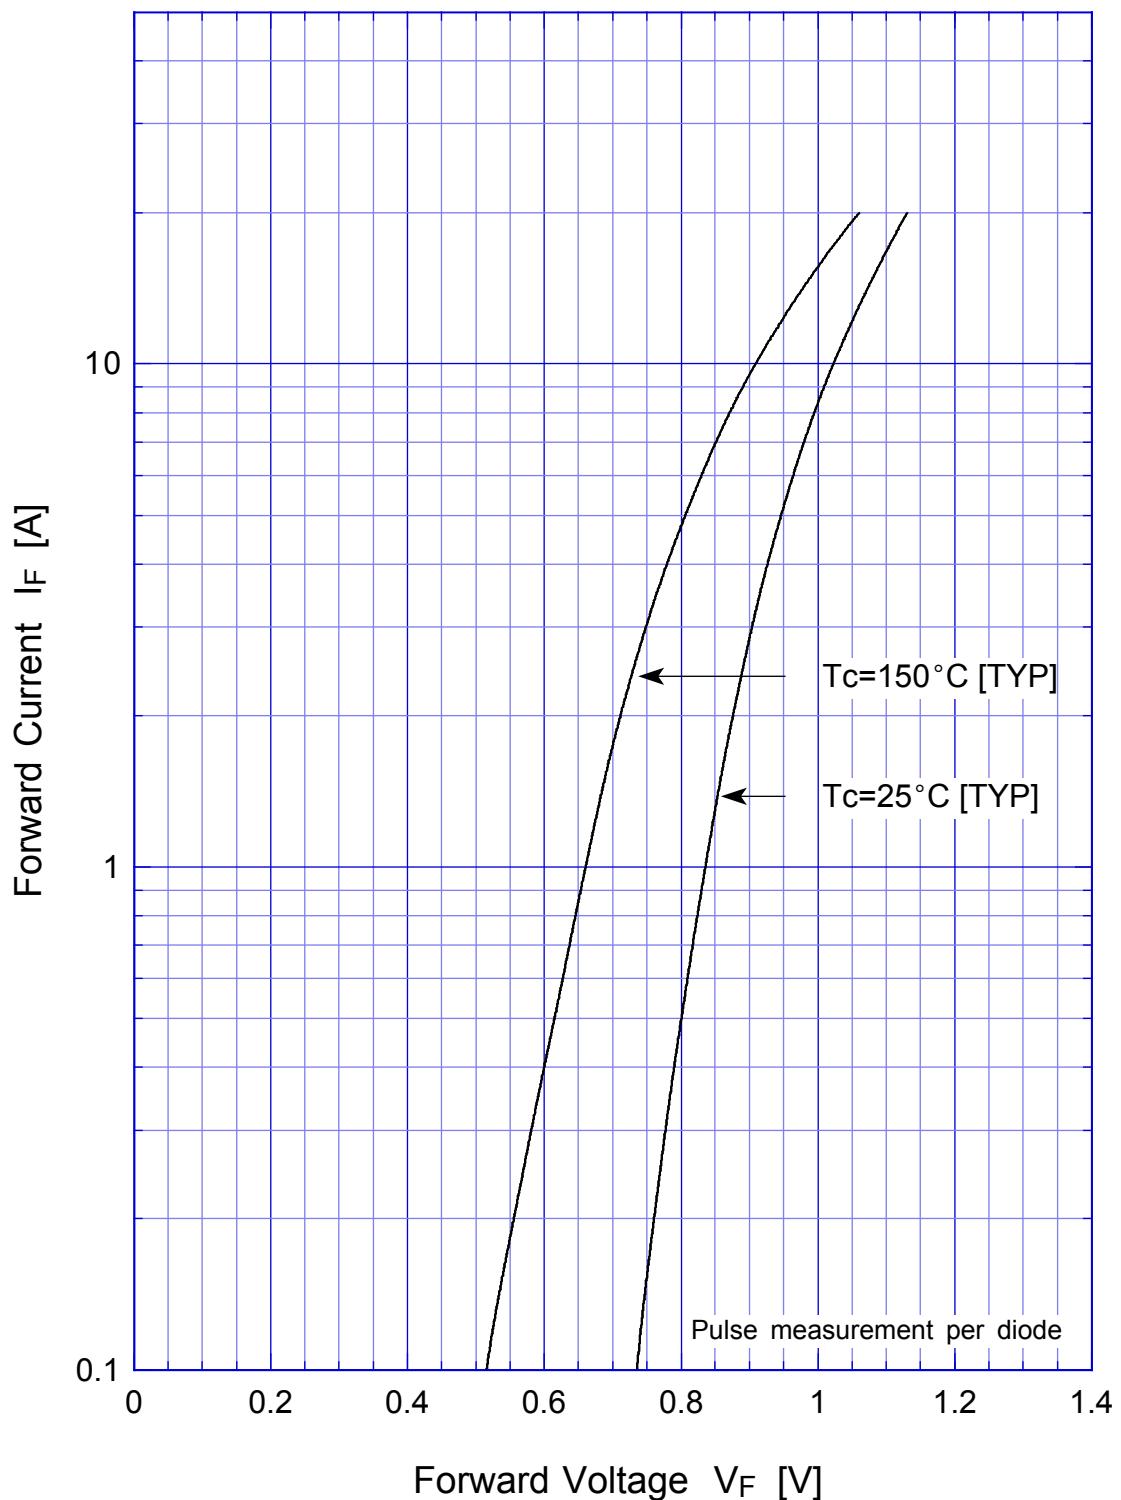

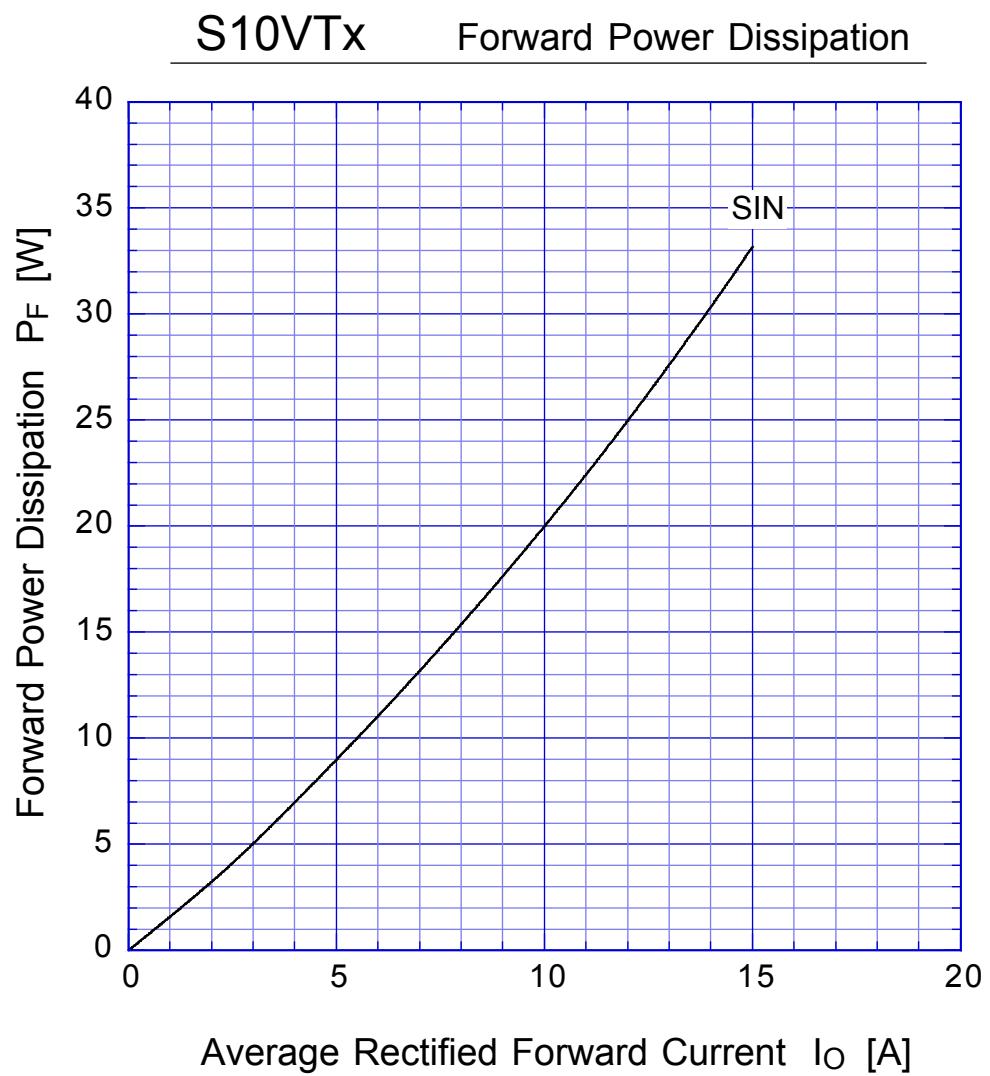

$T_j = 150^\circ\text{C}$
Sine wave

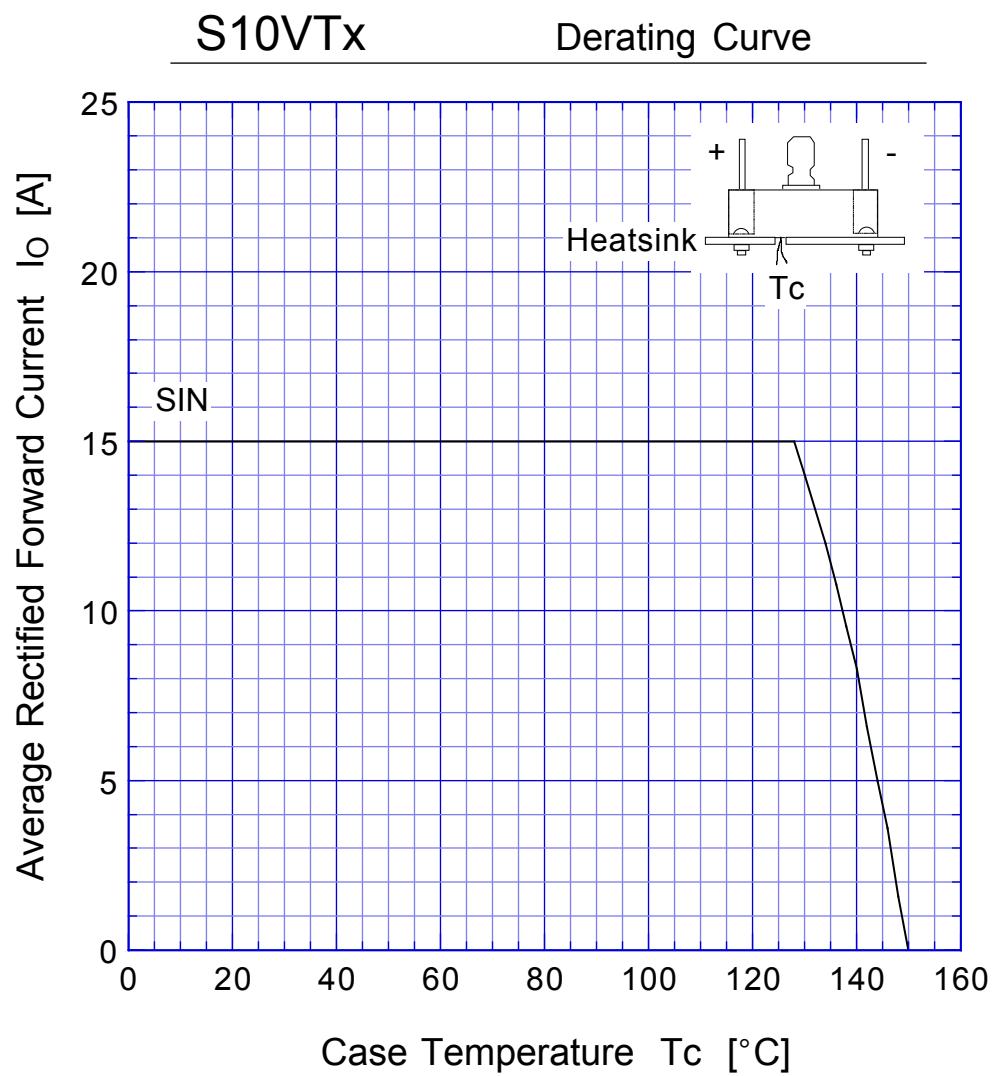

$V_R = V_{RM}$
Sine wave
R-load
with heatsink

S10VTx

Peak Surge Forward Capability

